

SENSOR TECHNOLOGY

Reed Switches


SMD Reed Switches

Reed Sensors

Hall Sensors

Magnets

Level Sensors

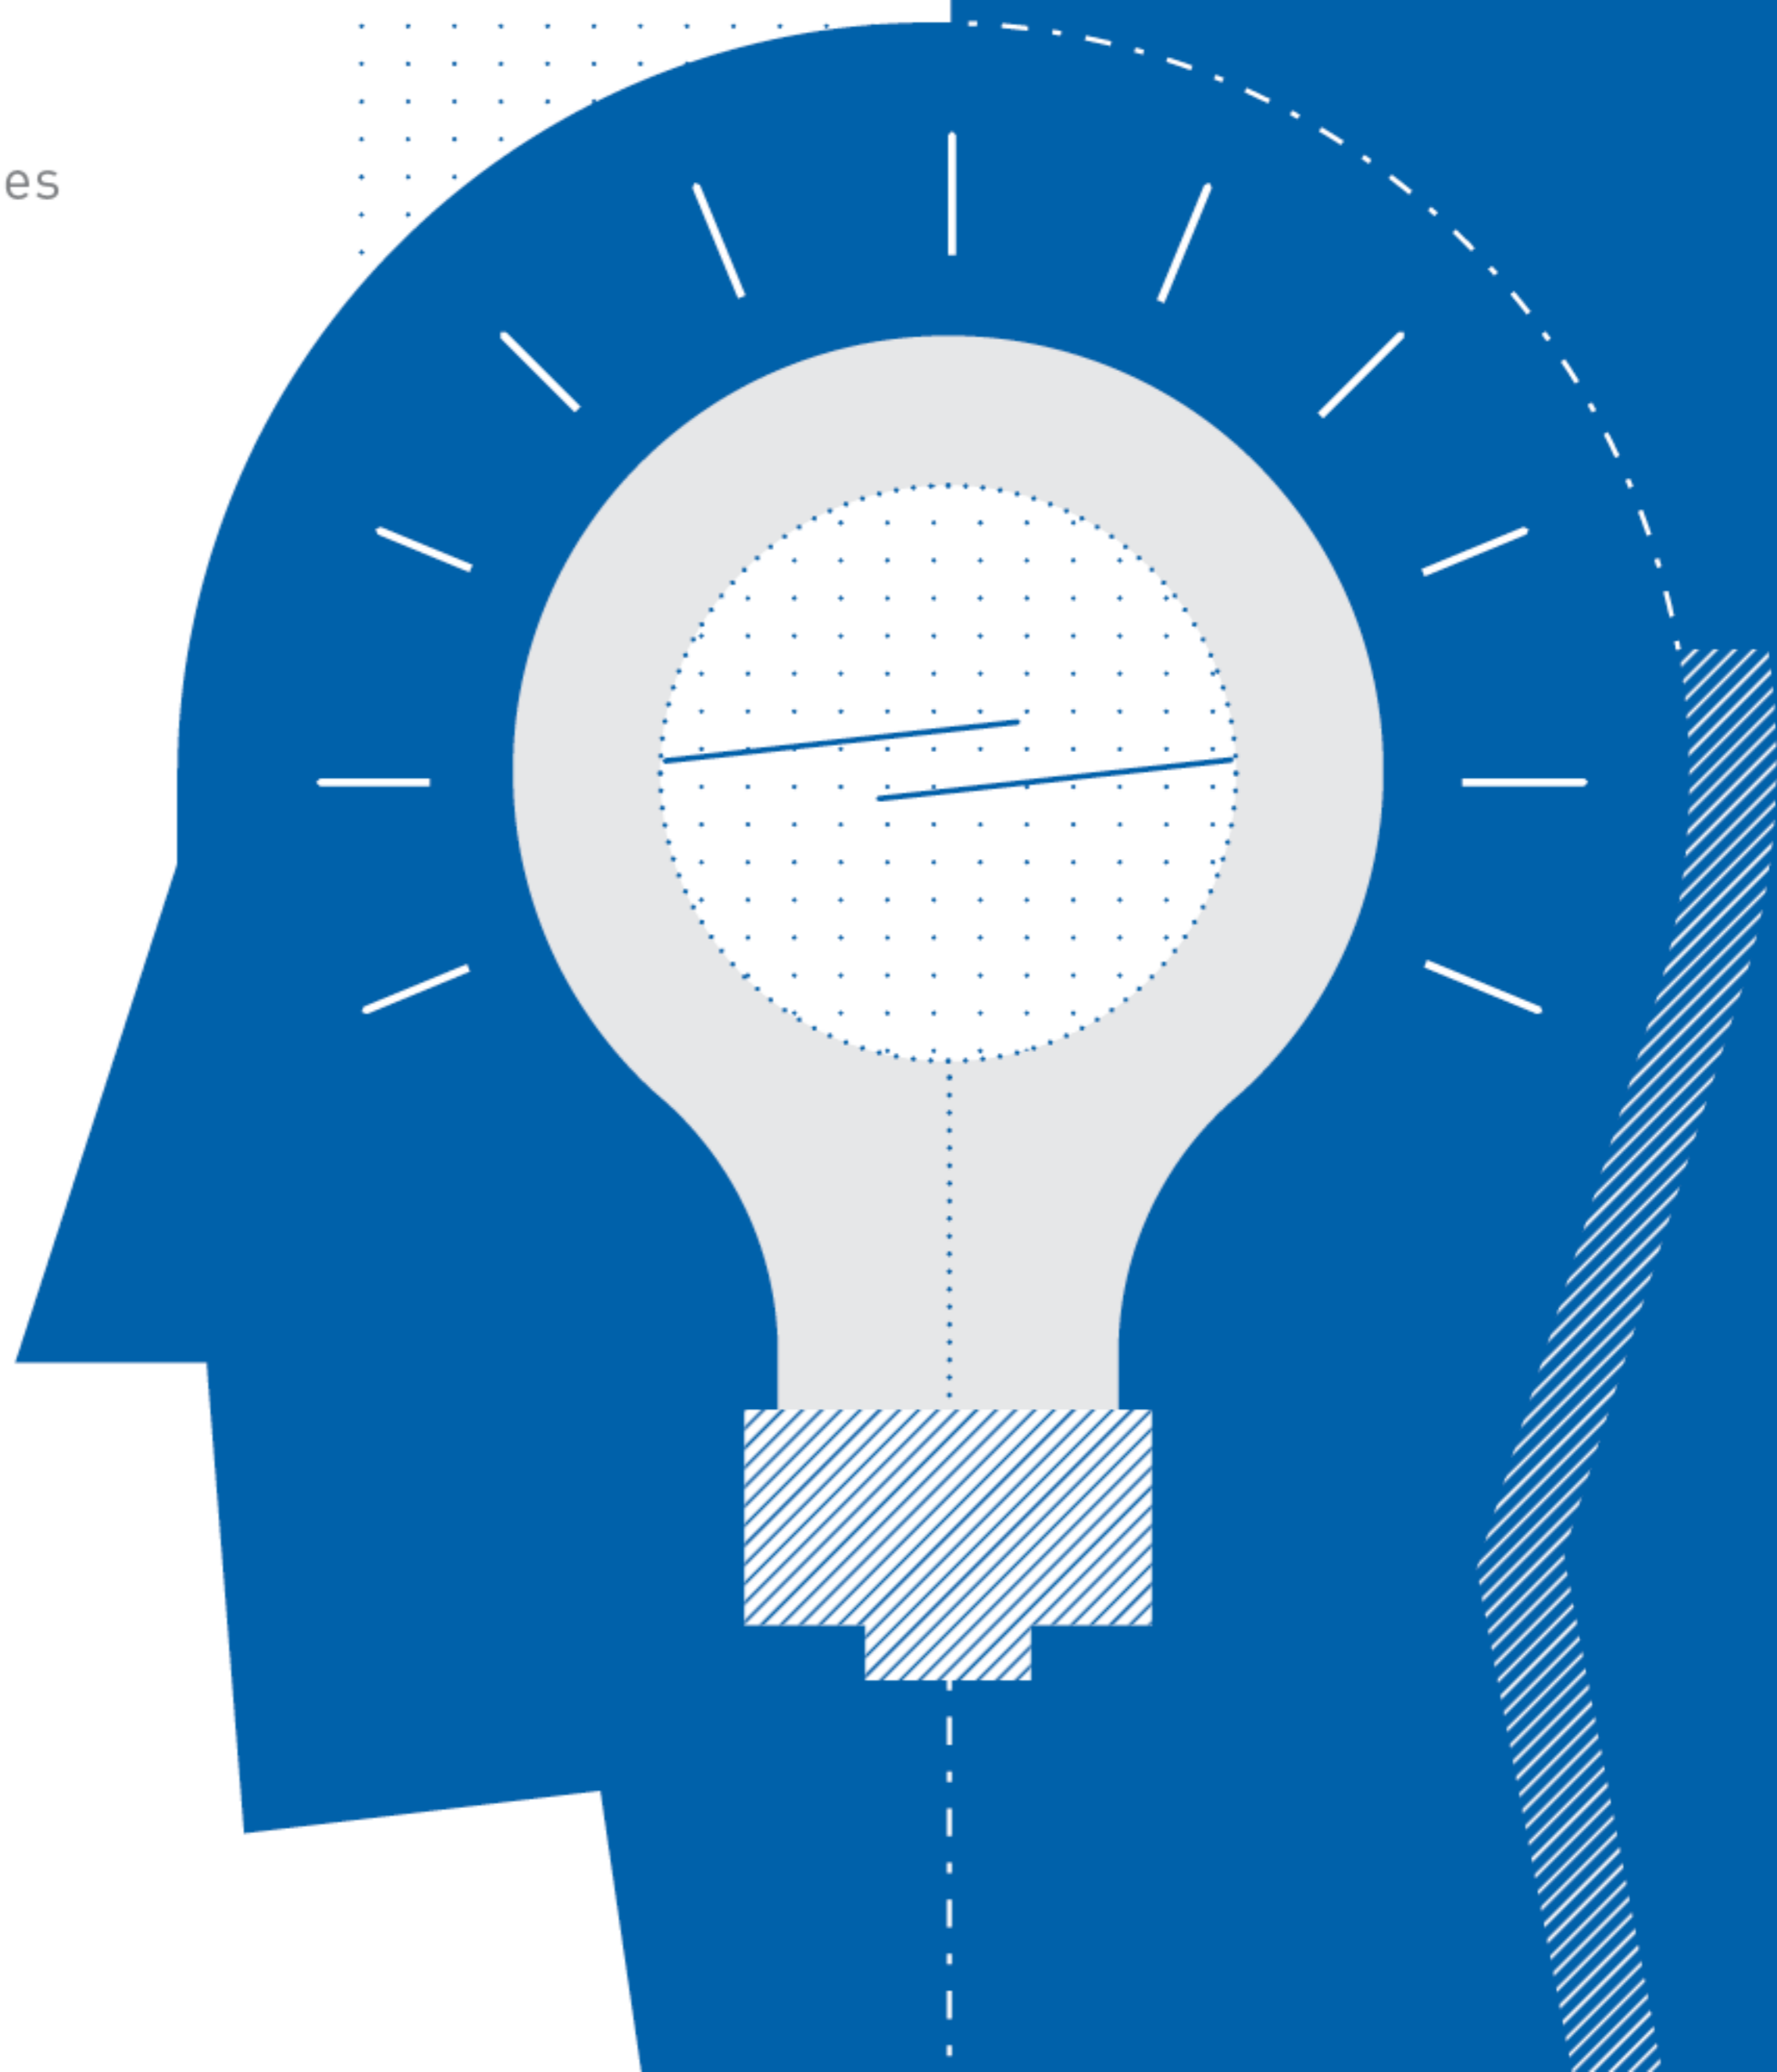

Progress through dynamics

Our work is never done. **Passion, respect, integrity and discipline** are the four core values which drive us to sophisticated products and continuous growth in a globalized world.

For more than 40 years we have been dealing with Reed Switches, Magnets and the manufacturing of high quality **customized sensor solutions** based on Reed- and Hall-Technology.

More than 300 employees – all of them **experts in their special trade** – are working in our headquarters in Germany, sales offices in Asia and Europe and our two own production facilities in China and Turkey.

With these three factors: people, knowledge and own manufacturing we make sure to be **your reliable partner for Sensor Technology** – today and tomorrow!

Innovation

Modern machinery, perfected production concepts, clear information policy and our comprehensive sensor know-how secure our premier position in the industry.

Quality

Continuous optimization in the areas of research, development, production, service and marketing assure high standards in product quality.


Sustainability

Sustainability is an essential part of our philosophy. Careful use of resources and environmental compatibility starts long before production and does not finish at sale. We remain true to this principle with regard to social and economic aspects.

Table of Contents


Reed Switches and SMD Reed Switches

Basics	6
Reed Switches	
Micro/Standard	7
Power/Special	8
SMD Reed Switches	
S-Series	10
T-Series	11
Z-Series	12
TH-Series	13
PRX+2-Series	14
Reed Chains.....	15

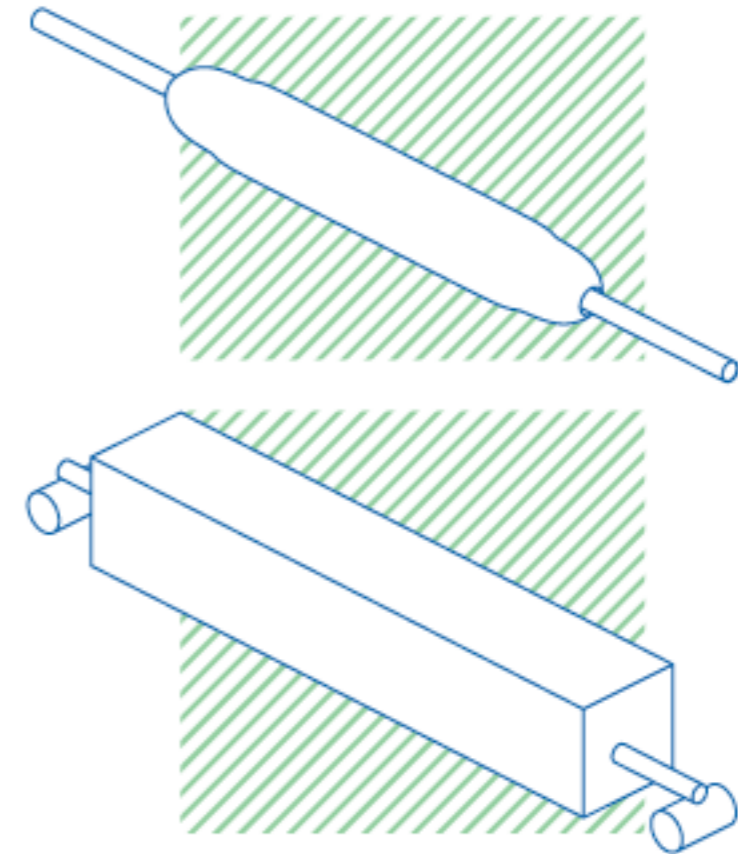


Sensors

Reed Sensors	
Basics	17
Flatpack	18
Through Hole	20
Tubular	21
Tubular Threaded	22
Press-fit	24
Snap-fit	25
Hall Sensors	
Basics	27
Flatpack	28
Tubular Threaded	29
Flange Mount	30

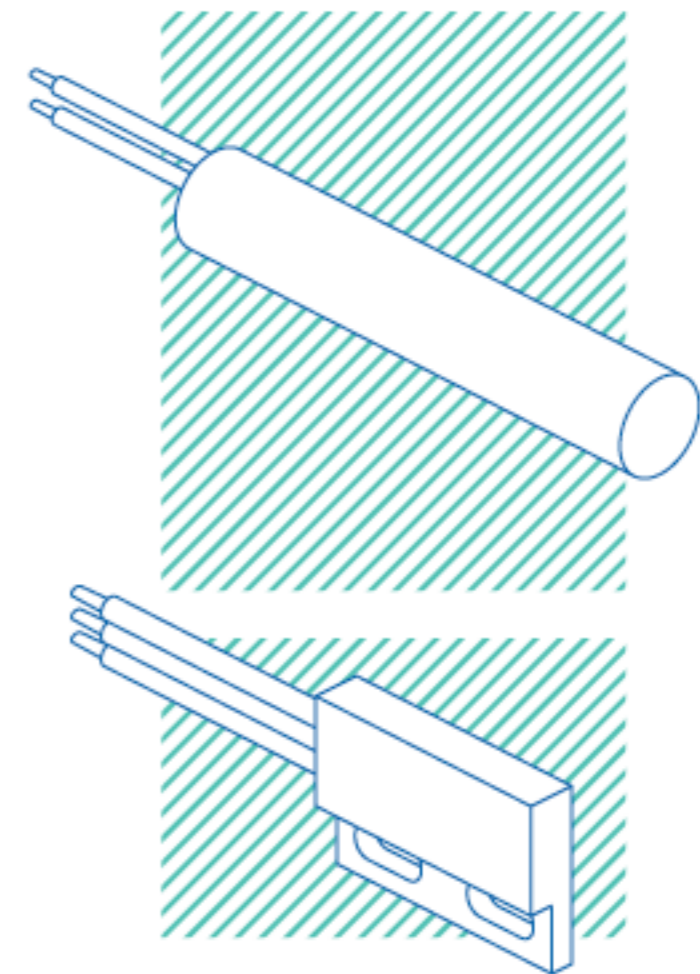


Magnets

Basics	32
Magnet Selector	33
Actuators	34

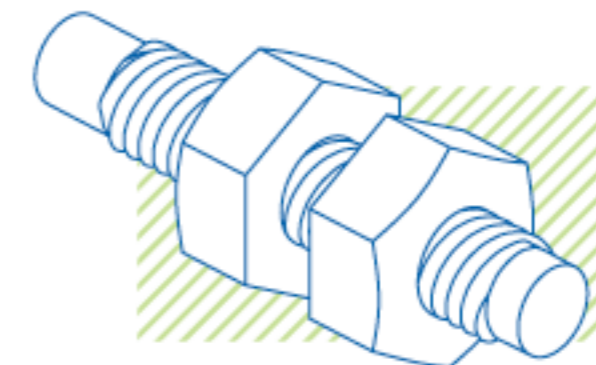


Level Sensors

Basics	37
PLS-PP-Series	38
PLS-PA-Series	40
PLS-VA-Series	41
PLS-PP Horizontal	42

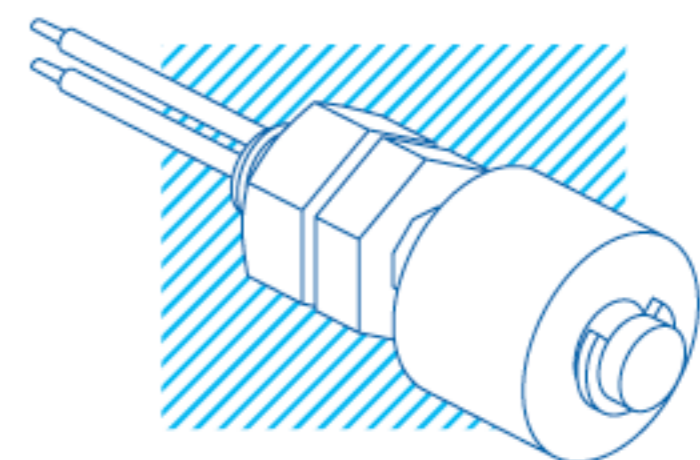


Customized Products

Basics	44
Examples	45

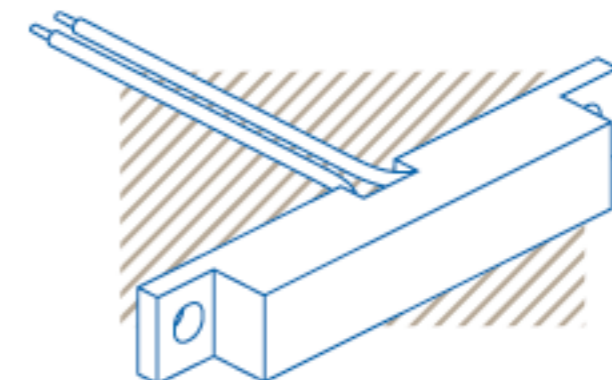

Tech Center



Reed Switches: How to operate	47
Reed Switches: Precautions	48
Housing Materials: Chemical resistance chart	49

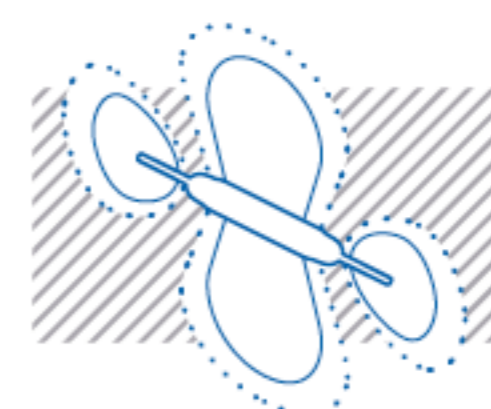






Contact	50
----------------------	----

Reed Switches

[Also known as Reed Contacts or Magnetic Contacts. Electromechanical, hermetically sealed components which close or open a circuit through actuation by a magnetic field.]

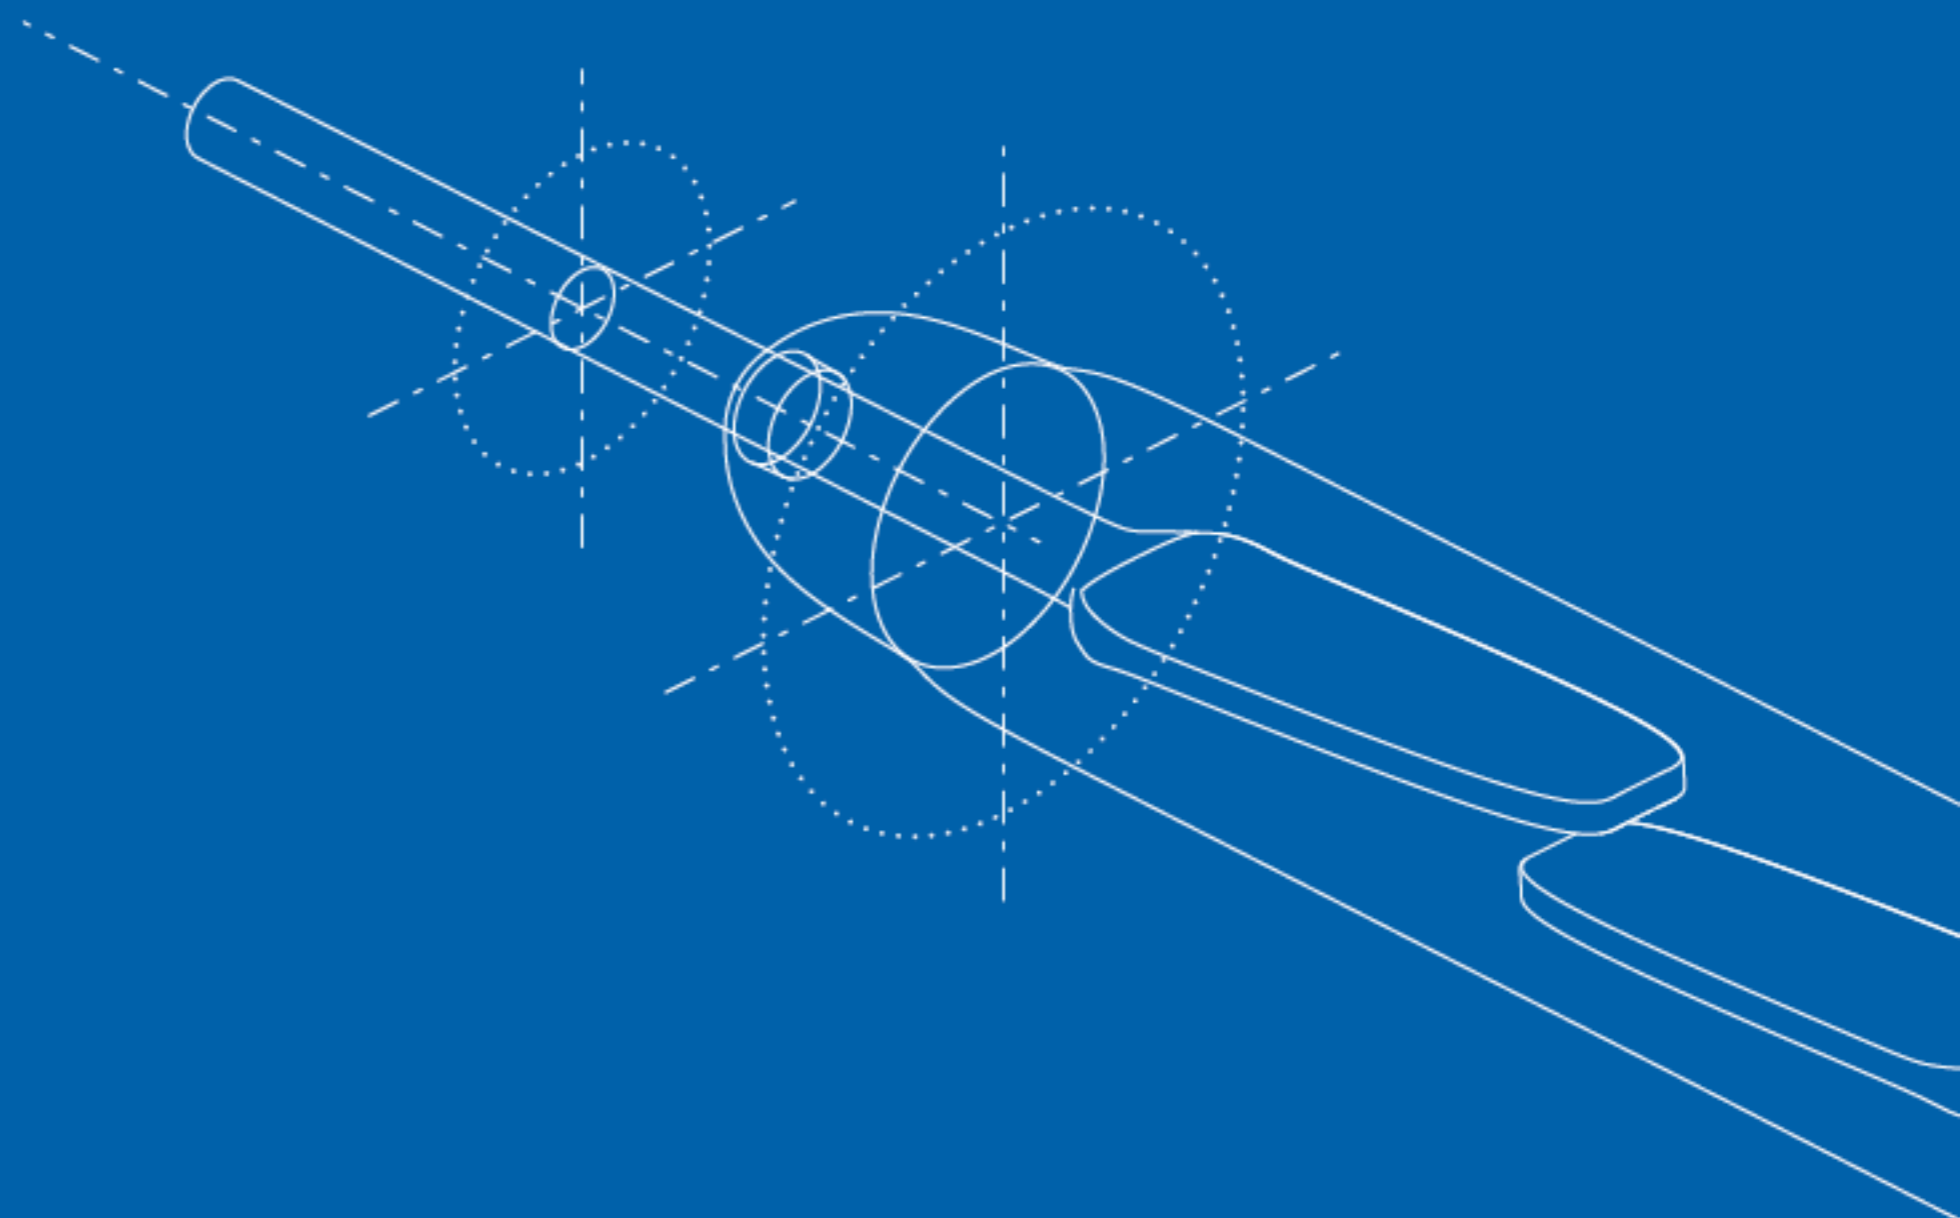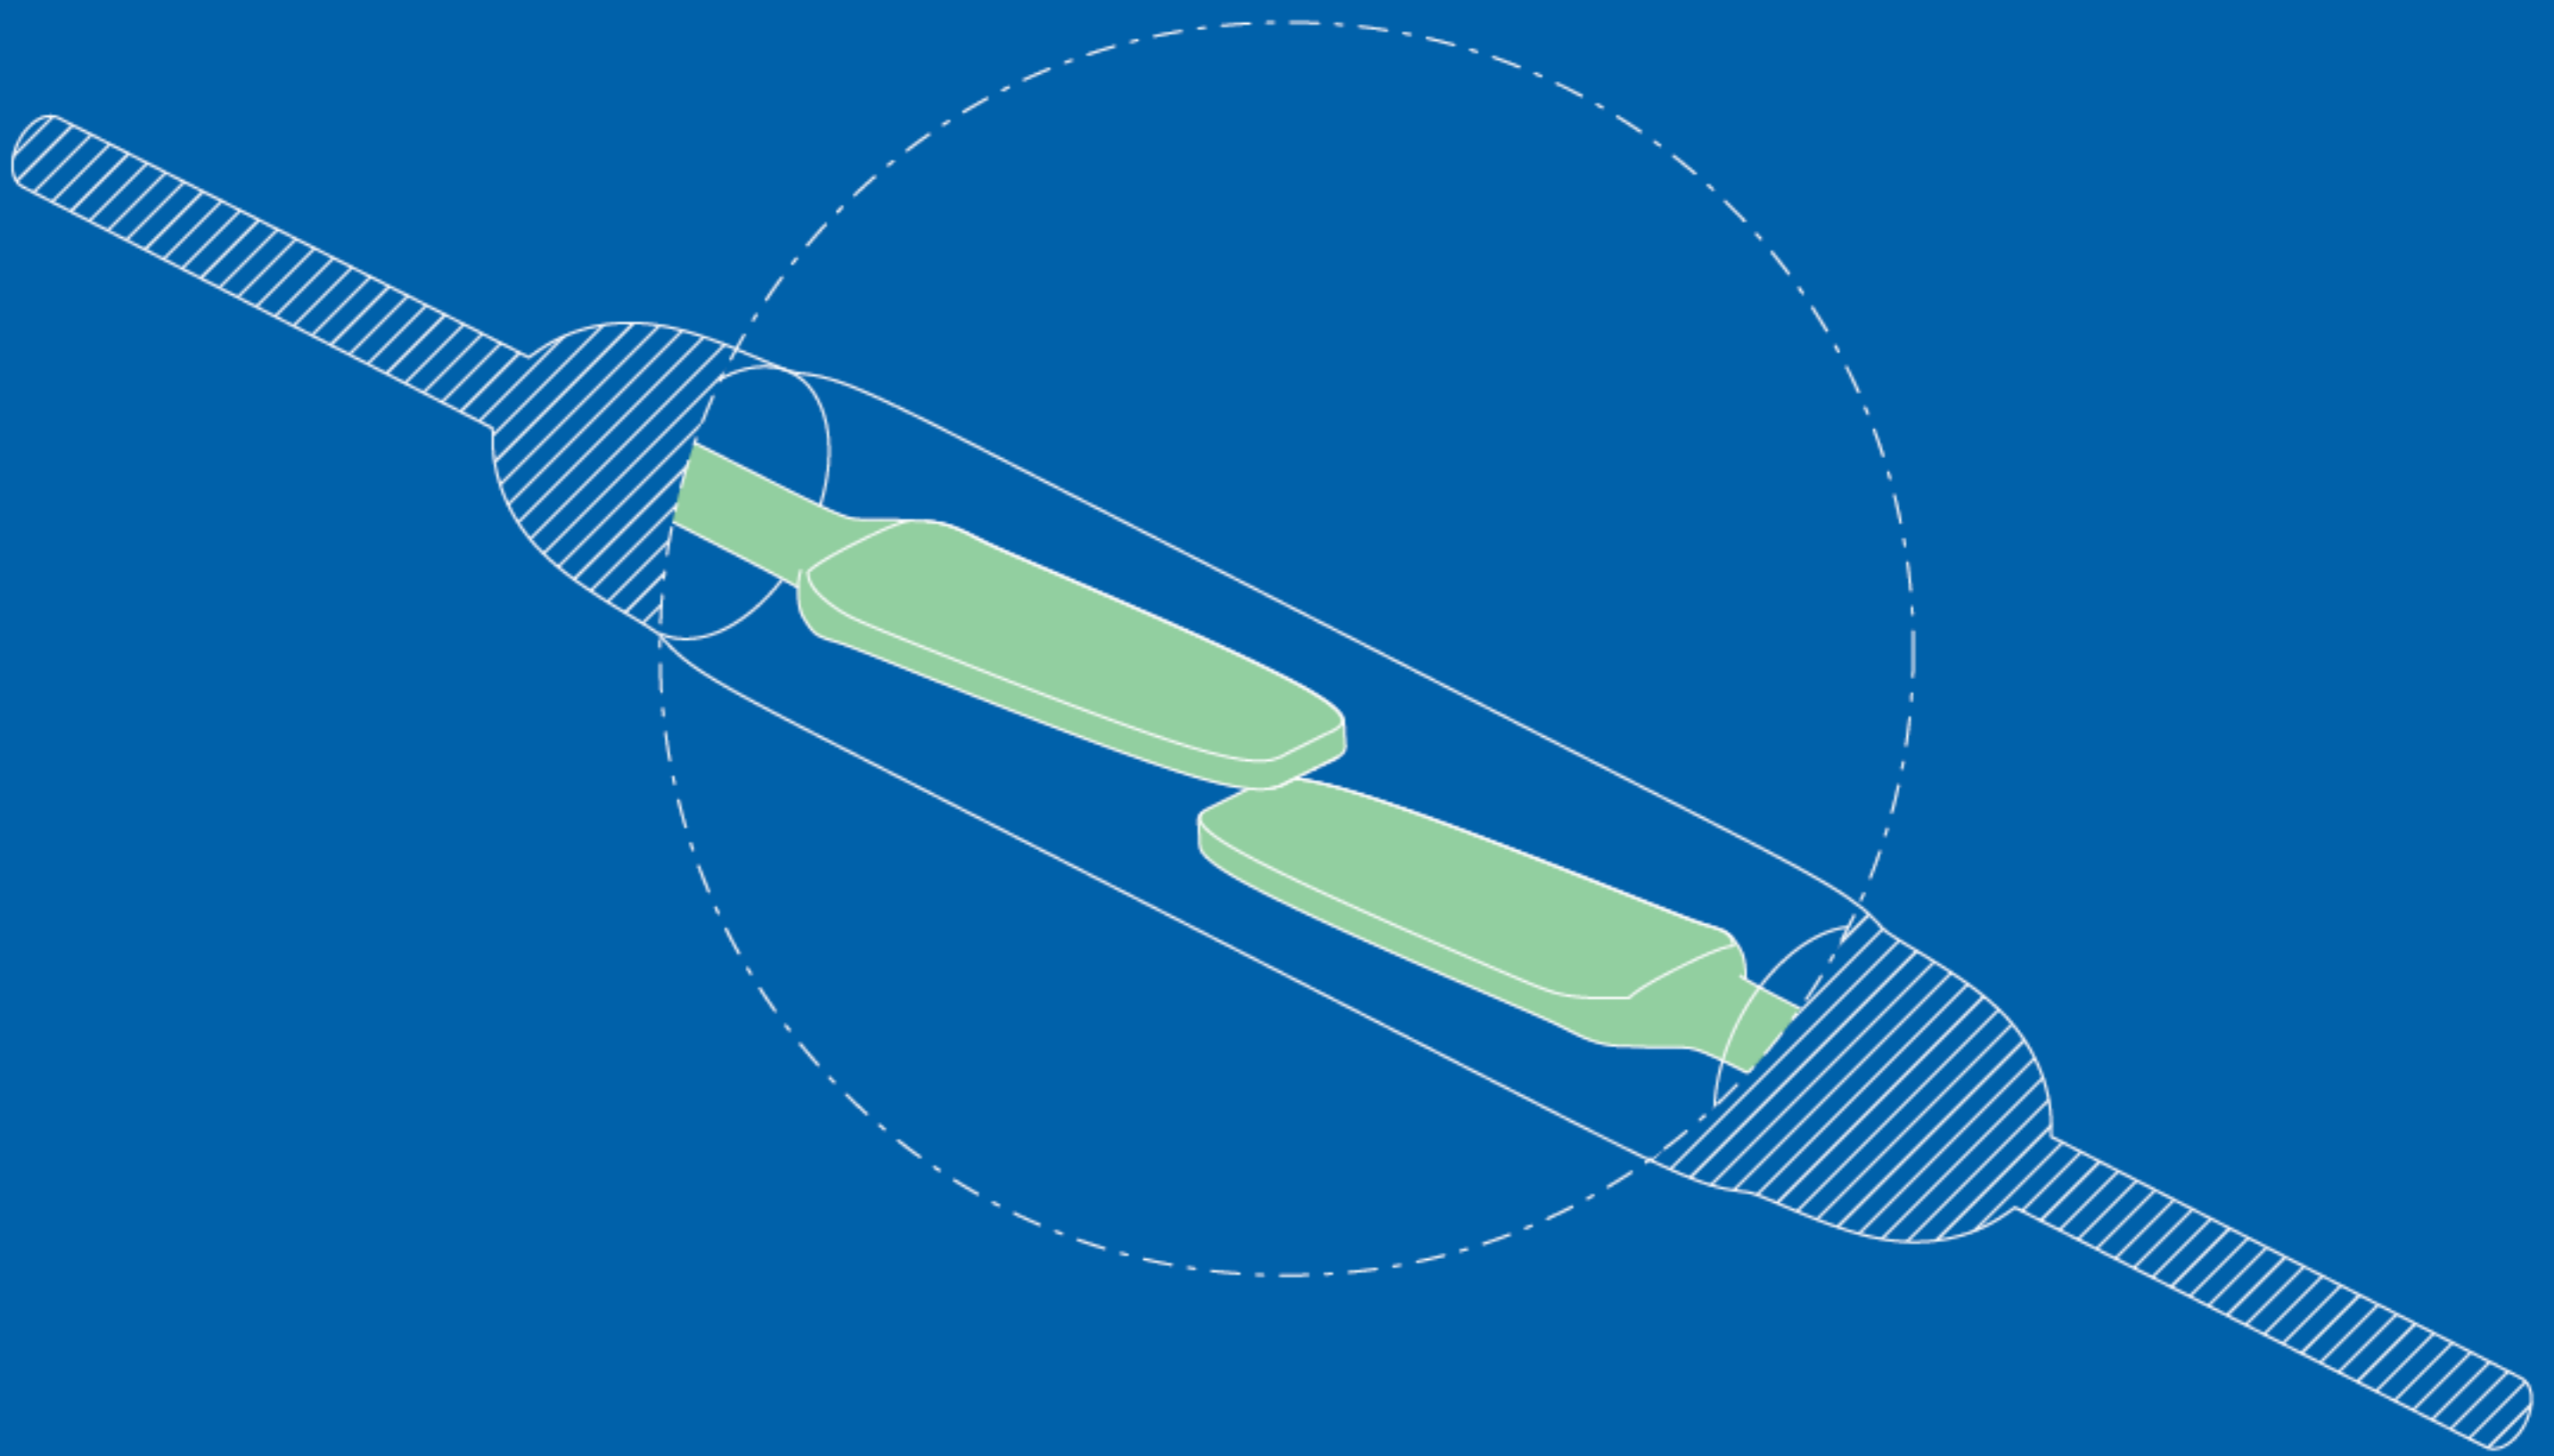


Different forms

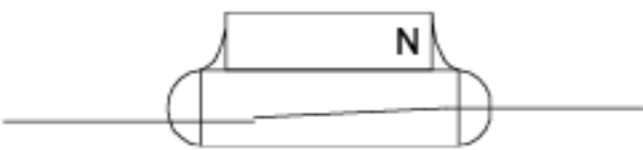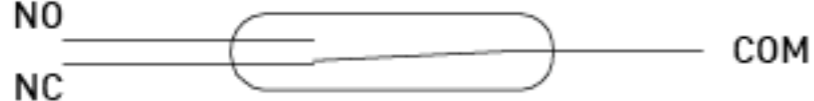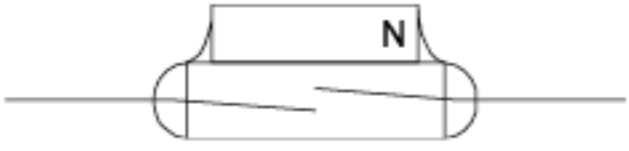- A**  **Form A**
Normally open, Reed Switch will close contact in presence of a magnet.
- B1**  **Form B**
Normally closed. Either achieved by using a Form C switch with the NO wire cut off or by using an attached magnet (requires pole oriented actuation).
- B2** 
- C**  **Form C**
Change over, Reed Switch will change from NC to NO contact in presence of a magnet.
- E**  **Form E**
Latching type. Switching status remains stable after a magnetic field disappears until a magnet with opposite polarity approaches.

How does a Reed Switch work?

A Reed Switch consists of a pair of ferromagnetic reeds, hermetically sealed in a glass tube. Their free ends overlap at a very small distance.

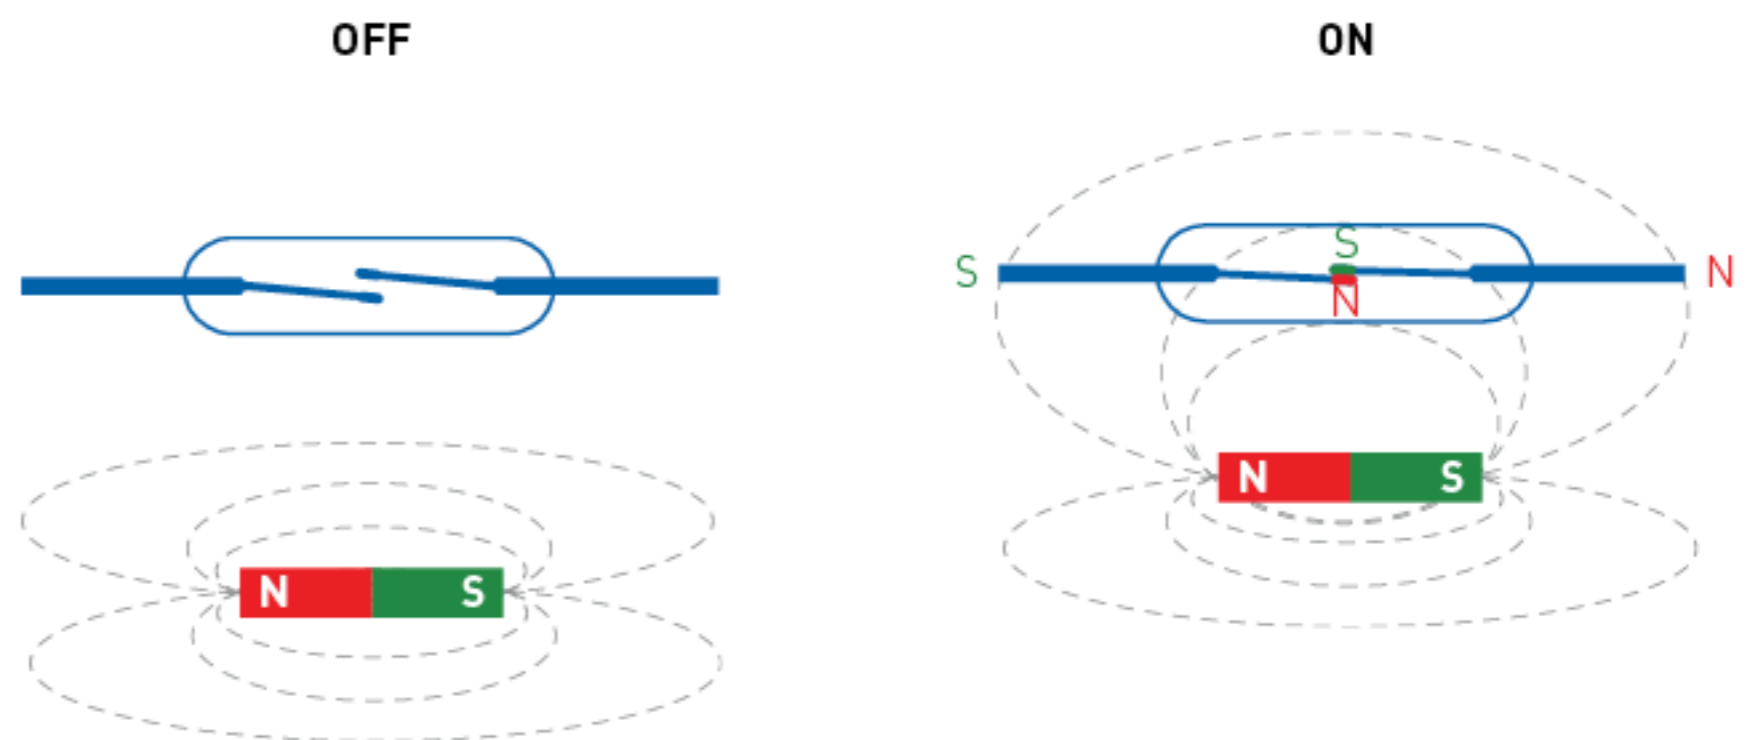

Benefits



- ▣ No power supply required
- ▣ Contacts hermetically sealed
- ▣ Most economic non-touch switching solution
- ▣ Not ESD sensitive
- ▣ Various methods of actuation possible
- ▣ Magnetic and electrical pole independent
- ▣ Non-touch actuation permits smooth surfaces and modern design
- ▣ Various sensitivity ranges available

Features

PMC-0701 for limited space the 7 mm glass length offers best solution

PMC-1401 most cost-efficient general purpose switch using 14 mm glass length

Close differential and mains voltage types available

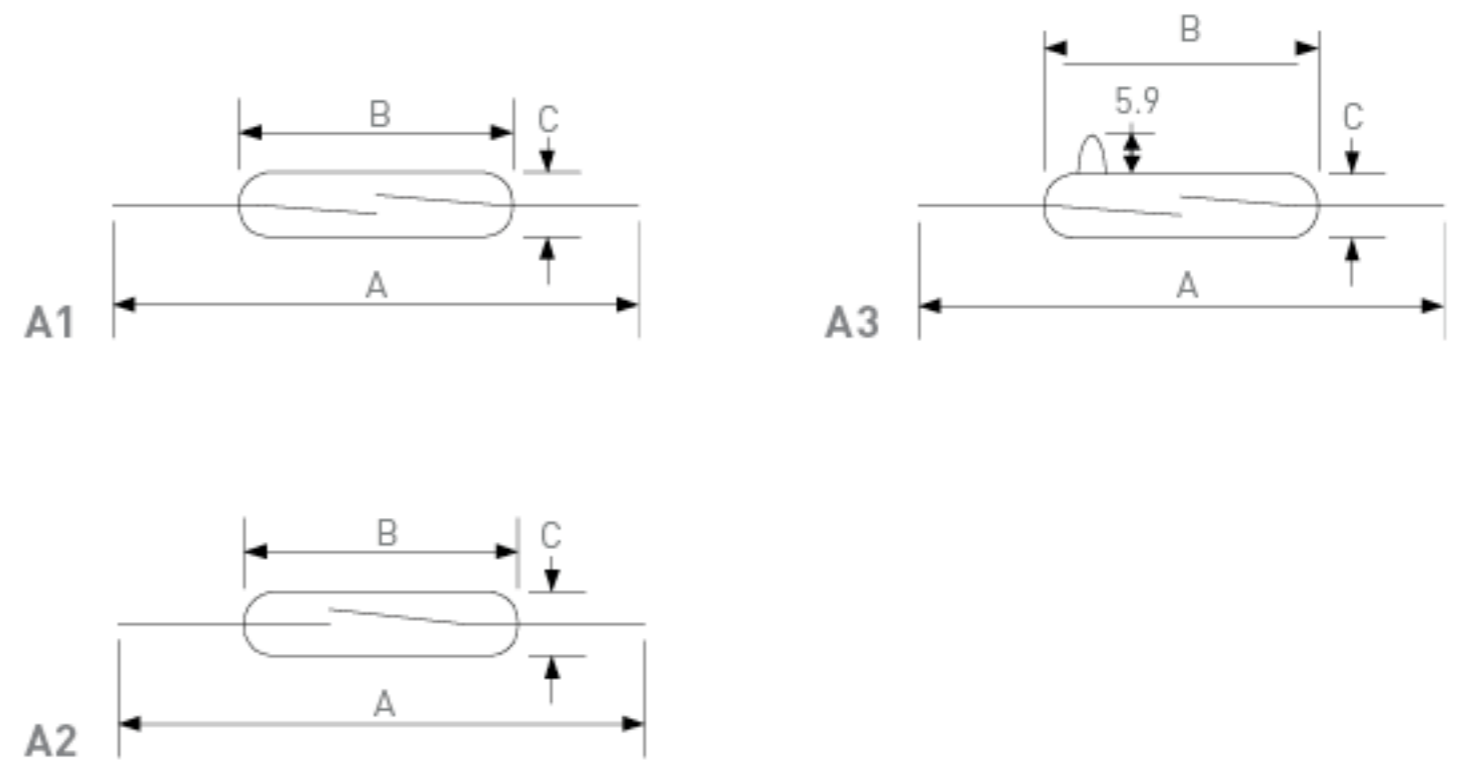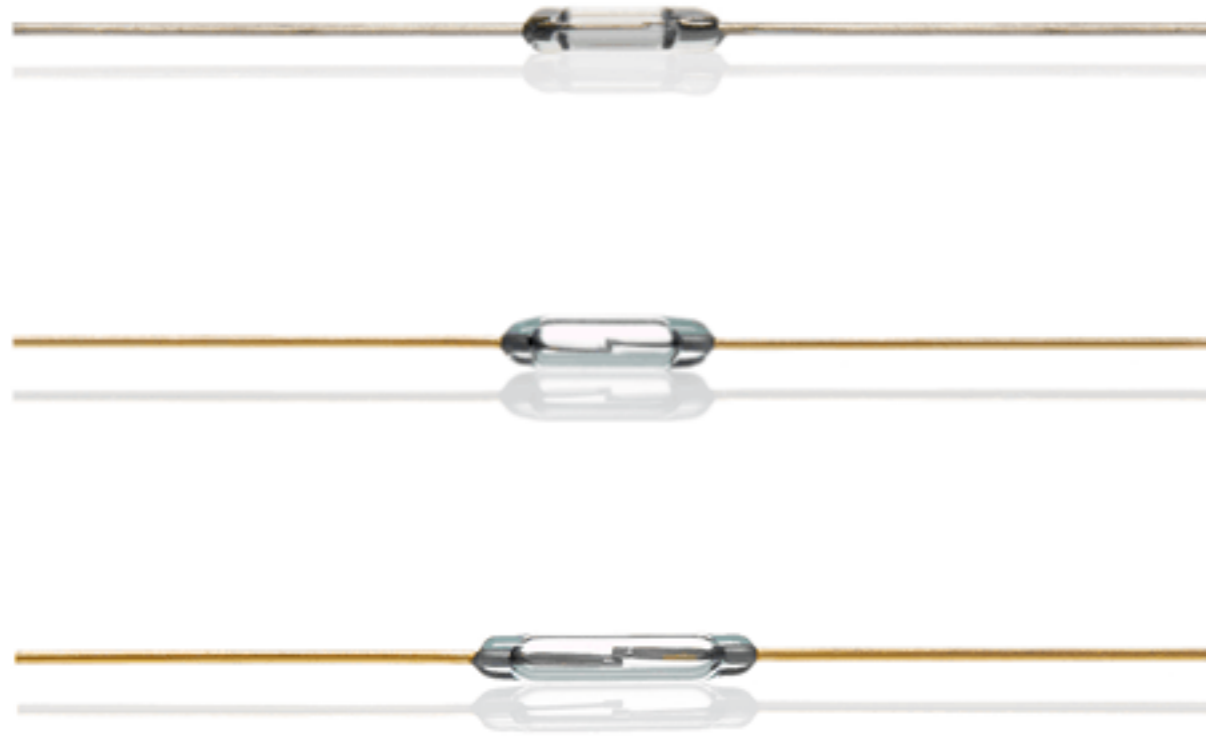

		Micro Switches				Standard Switches						
		HSR-0025	HSR-0035RT	PMC-0701	HSR-502	PMC-0822	PMC-1001	PMC-1401	PMC-2003 DO max. 60%	PMC-1515 Mains voltage	PMC-1496	TRH-200
Dimensions												
A = Total length nom.	mm	26.7	26.7	41.5	37.9	51.0	41.5	44.0	45.6	40.4	55.0	52.5
B = Glass length max.	mm	4.32	5.08	7.0	8.0	9.6	10.0	14.2	21.0	15.3	14.5	14.8
C = Glass diameter max.	mm	0.97×1.27	1.4	1.8	2.2	2.2	1.8	2.3	3.0	2.3	2.2	2.7
Contact arrangement (figure)		A2	A2	A1	C2	C2	A1	A1	A1	A1	C2	C2
Characteristics												
Contact form		A	A	A	C	C	A	A	A	A	C	C
Contact rating max.	W/VA	0.25	1	10	2	3	10	10	10	10	20	5
Switching voltage max.	VDC	30	30	150	30	50	180	200	180	200	150	175
	VAC	20	30	120	30	50	130	140	130	260	140	120
Switching current max.	A	0.01	0.05	0.5	0.1	0.2	0.7	1	1	0.3	1	0.25
Carry current max.	A	0.7	1	0.7	1	0.5	1	1.2	2	1.4	2	1.5
Breakdown voltage min.	VDC	80	200	200	200	100	200	240	250	400	200	200
Contact resistance (initial) max.	mΩ	750	750	200	300	150	150	100	150	100	150	100
Pull in range available	AT	4-15	5-20	10-20	15-35	15-25	10-25	10-30	30-50	20-30	15-30	15-30
Drop out min.	AT	1	3	4	5	5	4	4	45-60% of PI	4	6	5
Switching frequency max.	Hz	900	700	600	100	100	500	500	400	400	100	100
Vibration (50-2000 Hz)	g	15	15	10	30	30	20	20	20	30	30	30
Shock (1/2 sin 11 ms)	g	75	75	50	50	100	100	100	50	100	50	50
Operating Temperature	°C	-40 to +125				-40 to +130		-60 to +155	-40 to +125	-20 to +125	-40 to +130	-40 to +125
UL/CSA/RoHS		--/--/•	--/--/•	•/•/•	--/--/•	•/•/•	•/•/•	•/•/•	•/•/•	--/--/•	--/--/•	--/--/•

AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47/48 for additional technical information. All dimensions in mm. Subject to change without prior notice.



Features

Switching voltage up to 6 kV

Carry current up to 5A

Contact rating max. 250 Watts

Normally open, change over and latching types

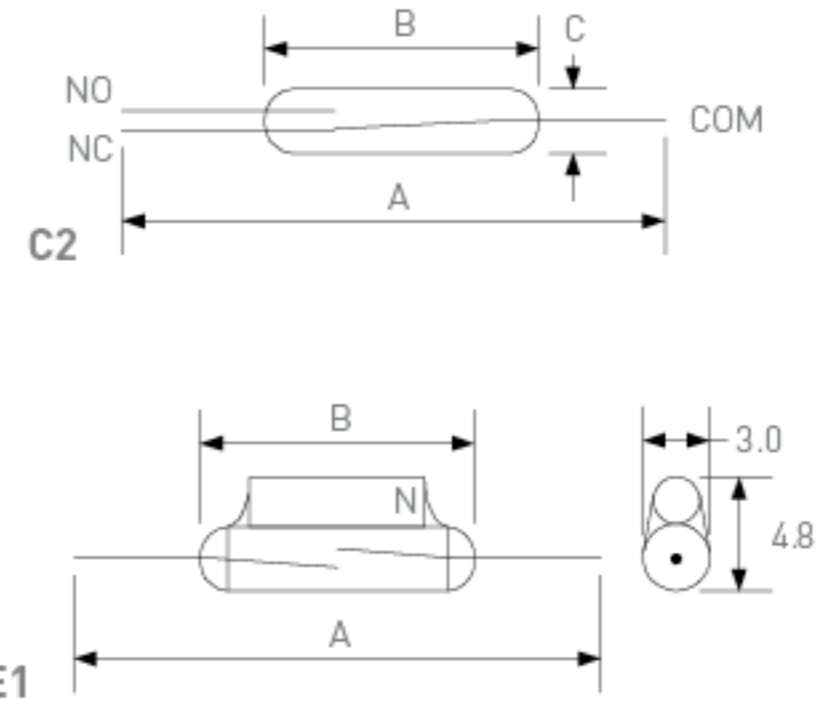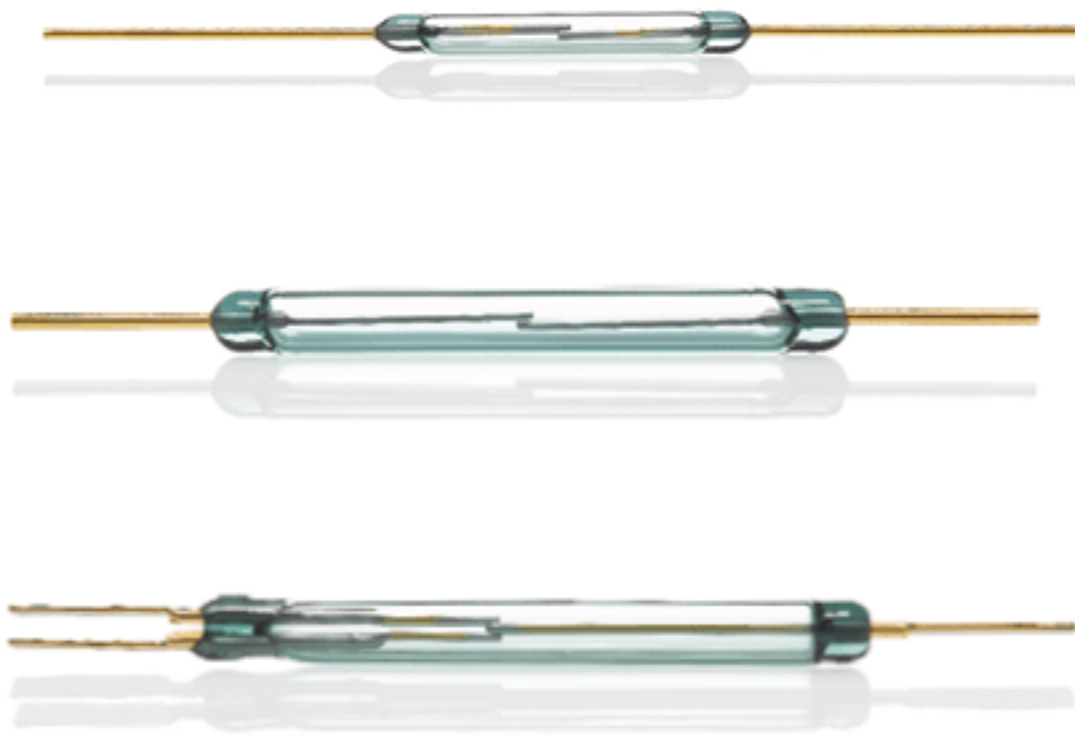



	Power Switches						Special Switches				
	PMC-2021	PMC-3617	PMC-5001	PMC-5002	PMC-5025	HSR-834WT	High voltage		Latching		
							HSR-V7K	HSR-V10K	HSR-V15K	PMC-1401X	
Dimensions											
A = Total length nom.	mm	55.0	70.0	80.0	80.0	80.0	86.0	82.0	82.0	82.0	44.0
B = Glass length max.	mm	20.0	36.0	50.0	50.0	52.0	34.3	52.0	52.0	52.0	14.2
C = Glass diameter max.	mm	2.54	5.6	5.4	5.4	5.6	5.33	5.4	5.4	5.4	
Contact arrangement (figure)		A1	C2	A1	A1	C2	C2	A3	A3	A3	E1
Characteristics											
Contact form		A	C	A	A	C	C	A	A	A	E
Contact rating max.	W/VA	50	60	120	250	60	100	50	50	50	5
Switching voltage max.	VDC	200	400	250	250	230	500	4000	5000	6000	140
	VAC	250	400	250	250	230	500	2800	3500	4200	100
Switching current max.	A	1.5	1	3	5	1	3	3	3	3	0.5
Carry current max.	A	2	2	3	5	2	3	4.5	4.5	4.5	0.7
Breakdown voltage min.	VDC	400	1000	700	700	400	1000	7000	10000	15000	200
Contact resistance (initial) max.	mΩ	100	100	200	200	100	500	150	150	150	150
Performance											
Pull in range available	AT	25-40	50-80	50-90	50-100	80-120	60-100	60-125	100-150	140-170	
Drop out min.	AT	5	20	20	15	20	30	20	30	40	
Environmental											
Switching frequency max.	Hz	300	100	25	25	100	50	50	50	50	500
Vibration (50-2000 Hz)	g	20	35 ¹⁾	10 ²⁾	10 ²⁾	35 ¹⁾	15	30	30	30	10
Shock (1/2 sin 11 ms)	g	50	50	150 ³⁾	150 ³⁾	50	10	100	100	100	50
Operating Temperature	°C	-60 to +125	-40 to +125	-60 to +130	-60 to +100	-40 to +125	-25 to +125	-60 to +125			-40 to +125
UL/CSA/RoHS		•/•/•	--/--/•	•/•/•	•/•/•	--/--/•	•/•/•	--/--/•	--/--/•	--/--/•	--/--/•

¹⁾ 10-2000 Hz ²⁾ 1-500 Hz ³⁾ 1/2 sin 2 ms

AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47/48 for additional technical information. All dimensions in mm. Subject to change without prior notice.

SMD Reed Switches


[Modified Reed Switches with or without housing, suitable for automated production processes (SMT Technology) and therefore shipped in Tape&Reel-Packing.]

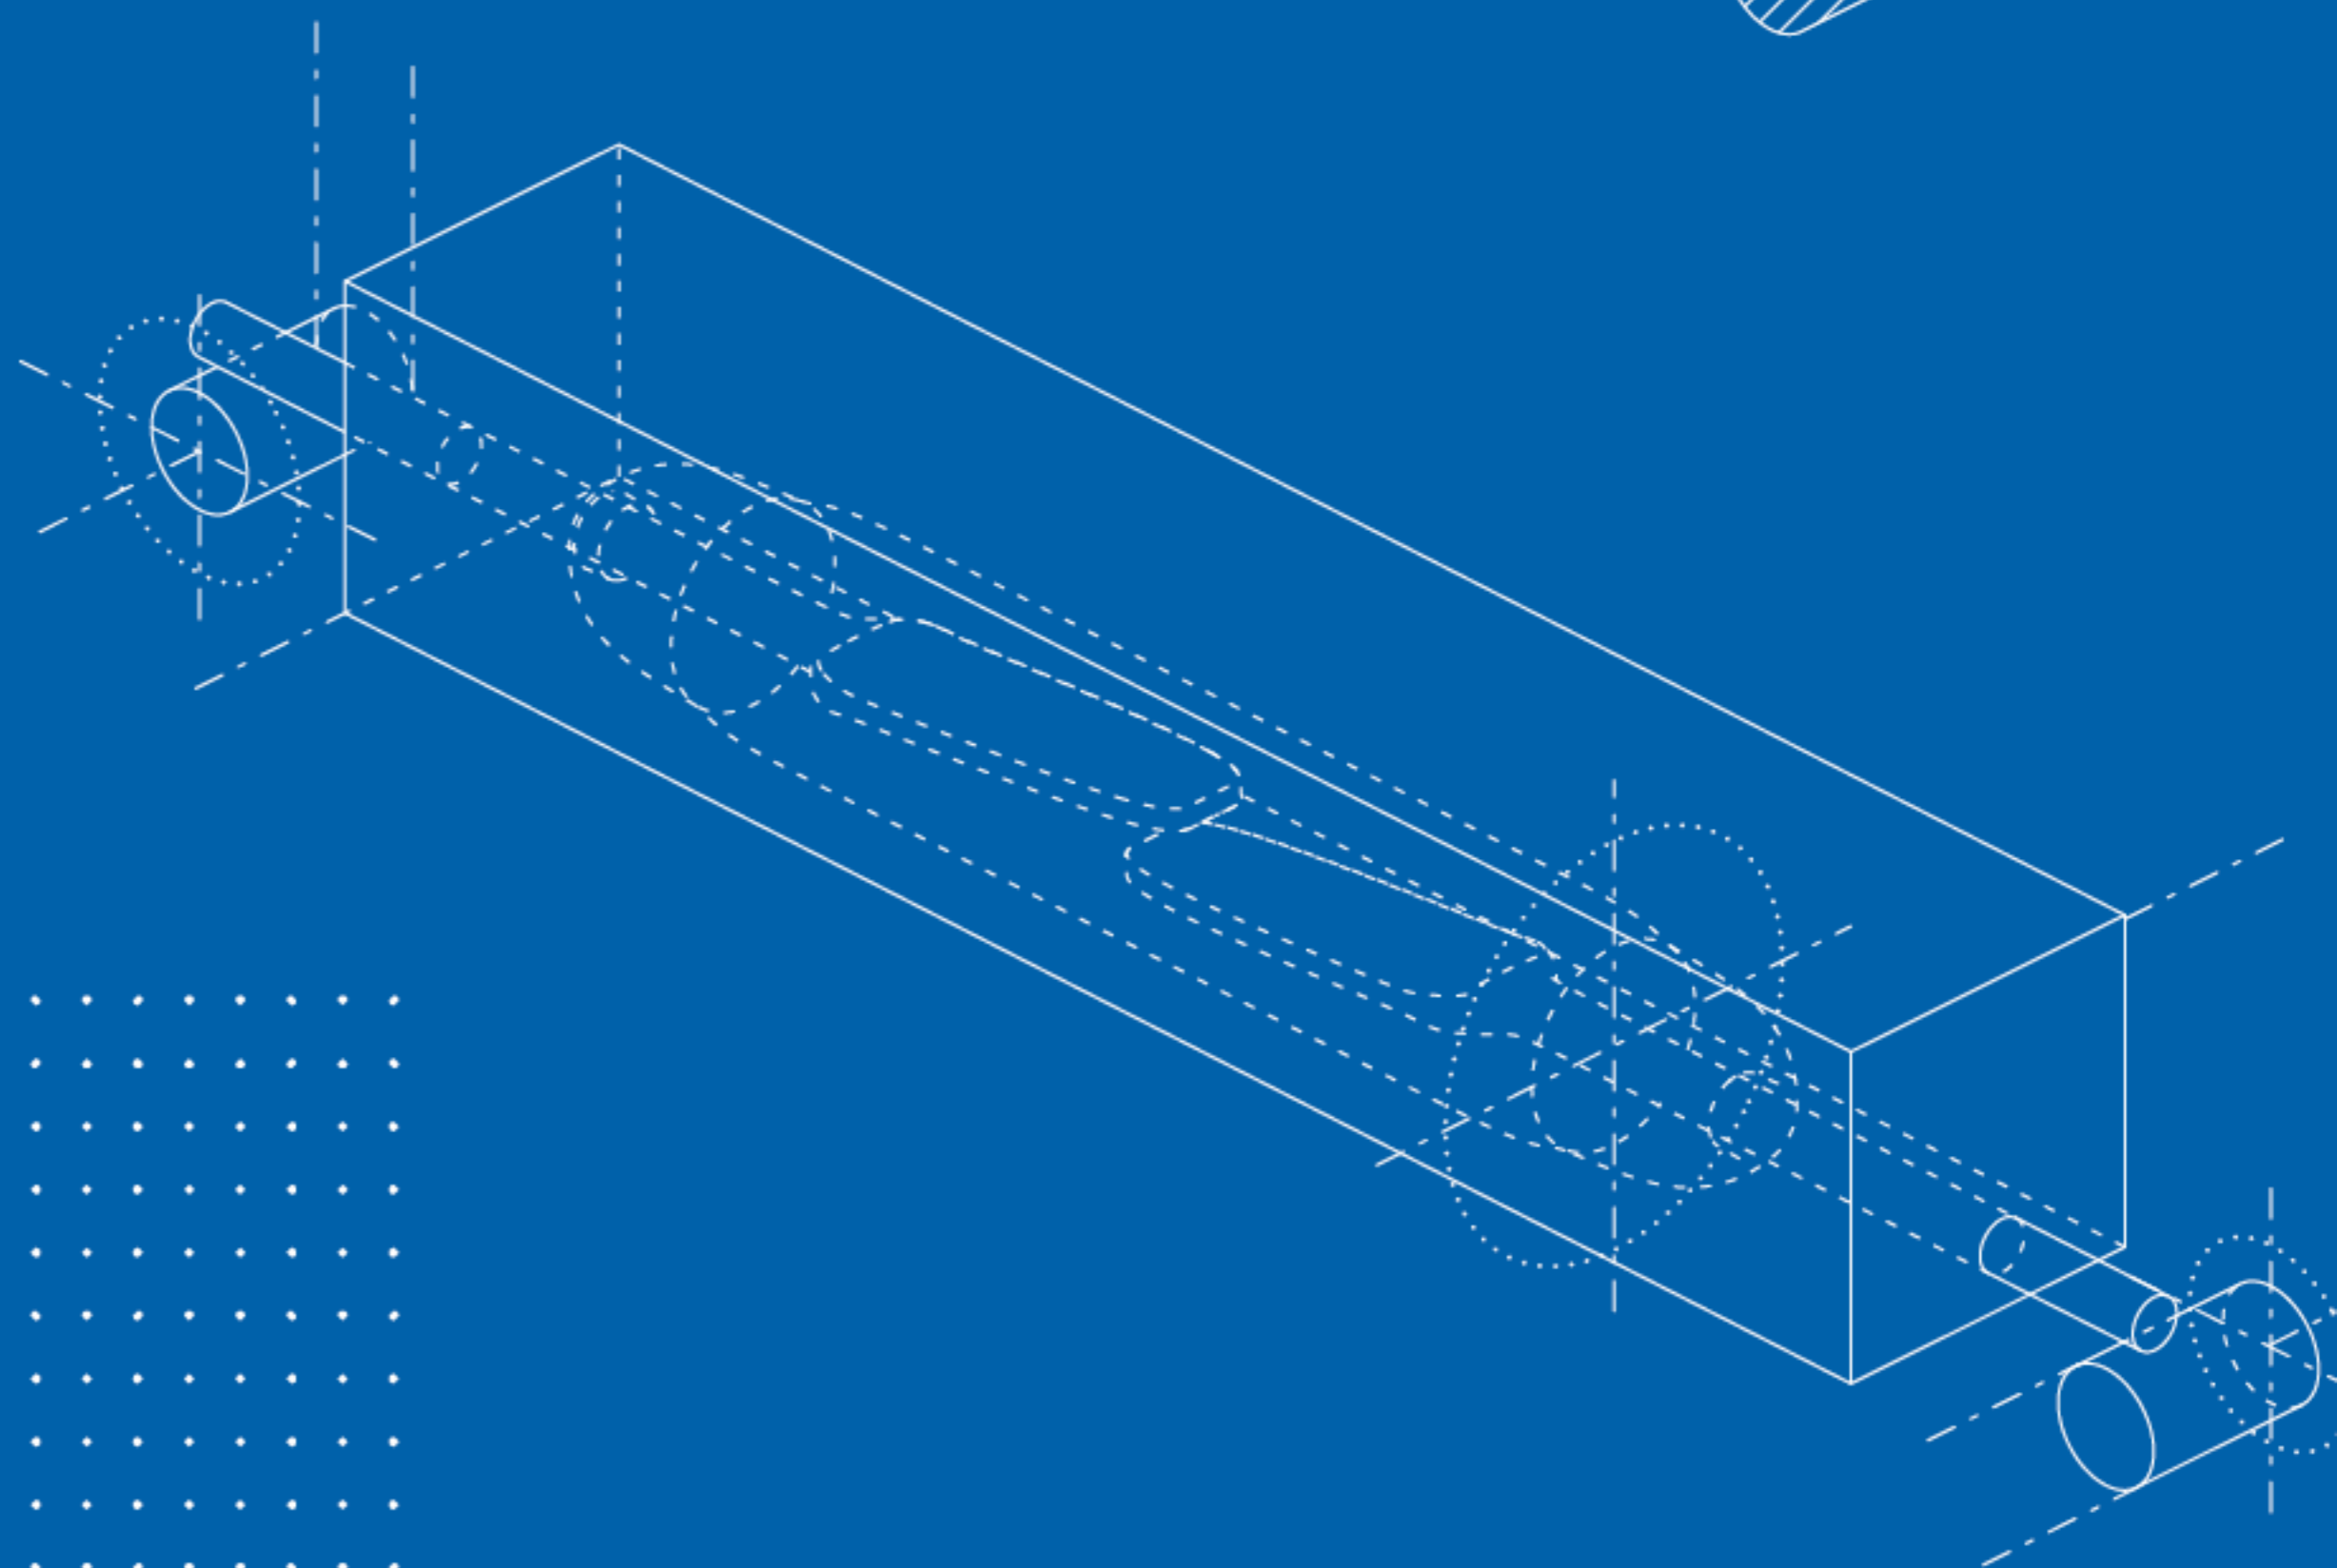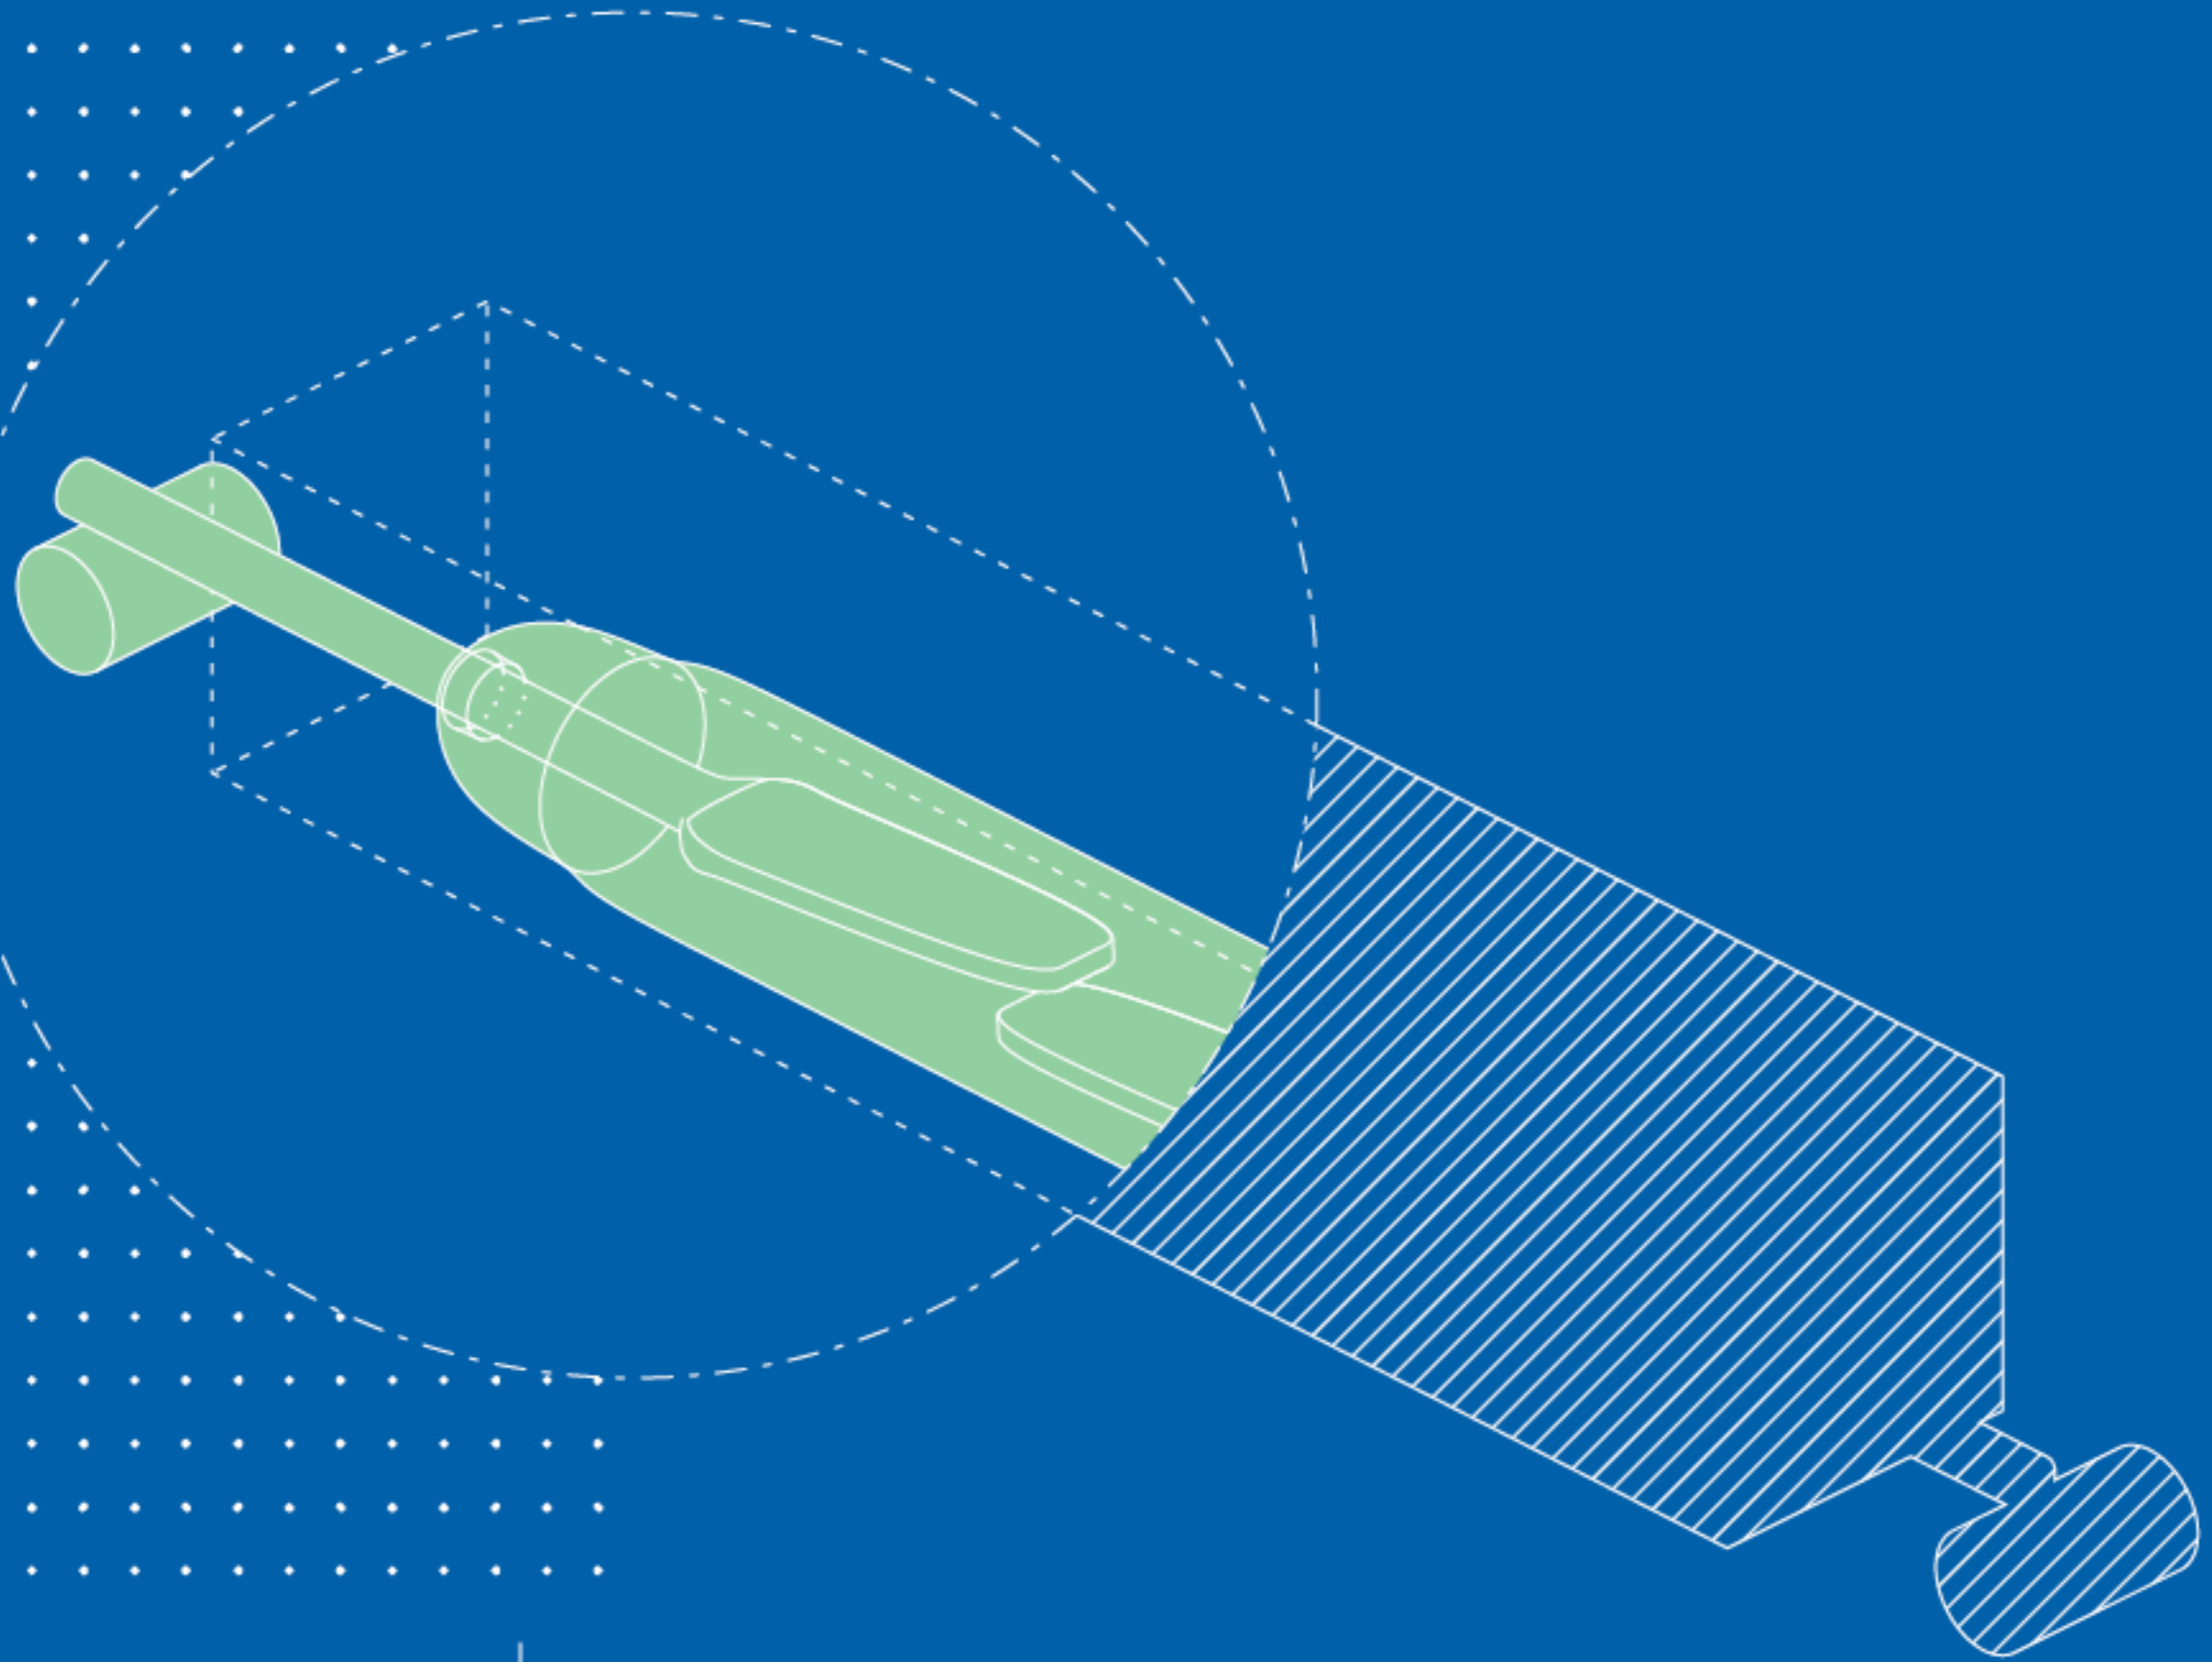




S-Series

Features




- Most economic Reed Switch for automated assembly
- Assembly in PCB cutout reduces height above PCB by approx. 50%
- Various sensitivity ranges and total lengths variants

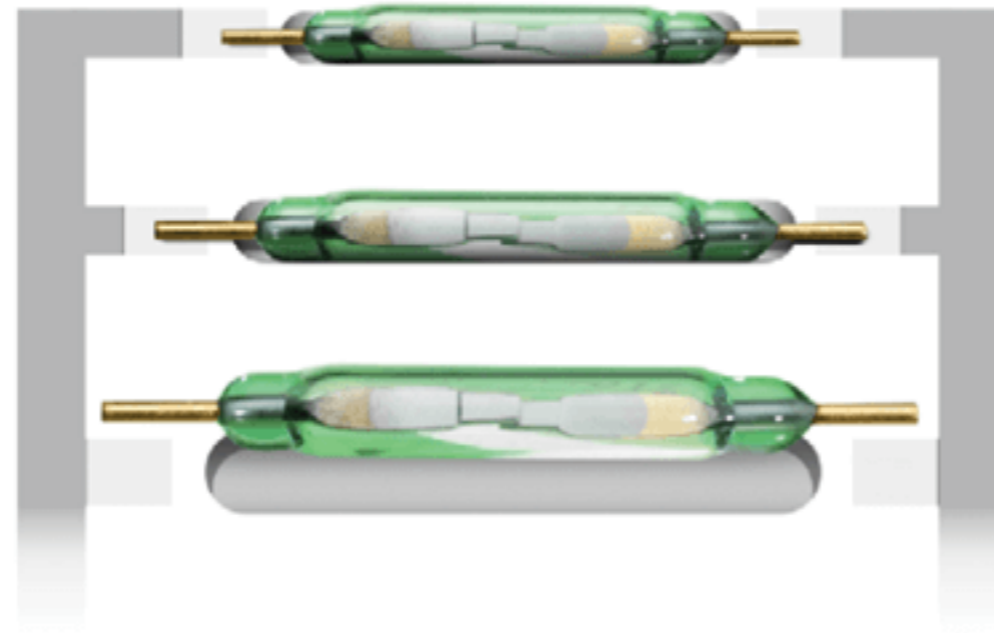




PMC-0701S

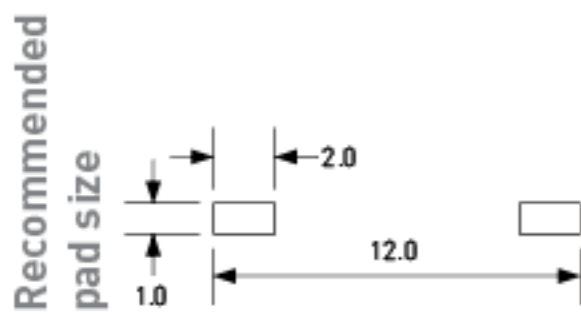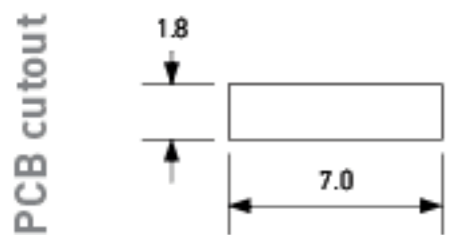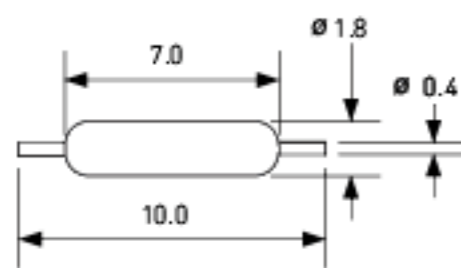



PMC-1001S

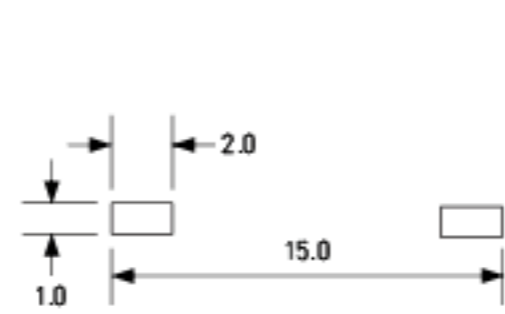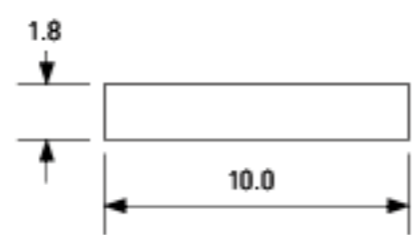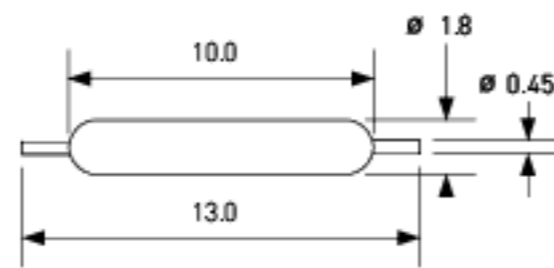

PMC-1401S

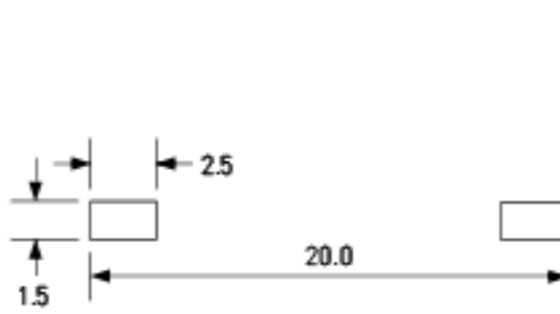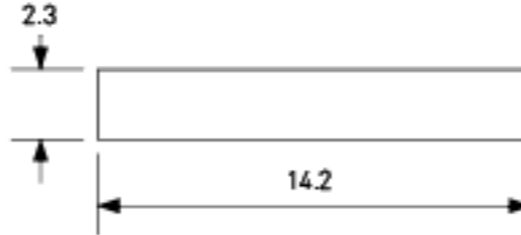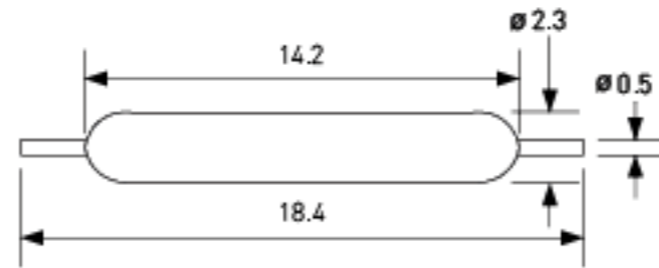

PMC-2021S

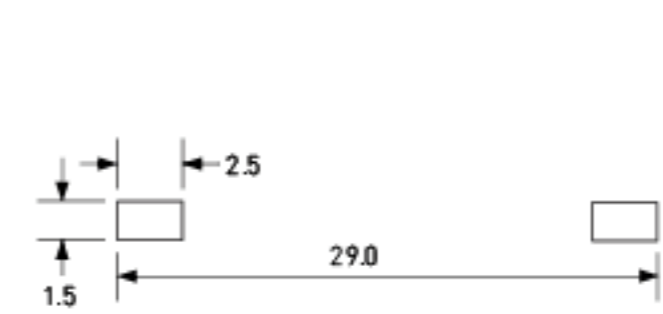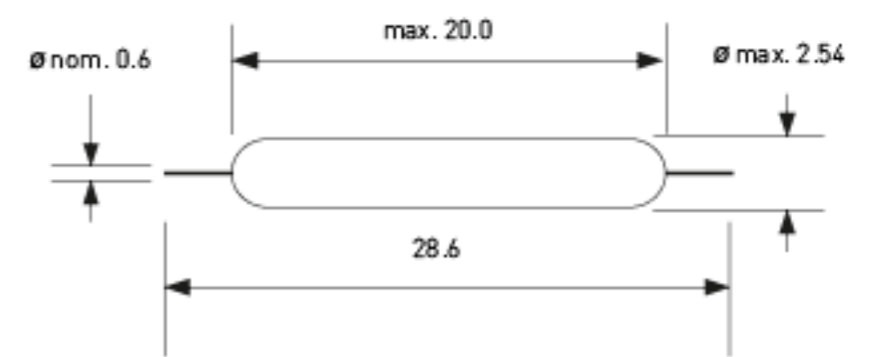

		PMC-0701S	PMC-1001S	PMC-1401S	PMC-2021S
Contact form		A	A	A	A
Contact rating max.	W/VA	10	10	10	50
Switching current max.	A	0.5	0.7	1	1.5
Switching voltage max.	VDC	150	180	200	200
	VAC	120	130	140	250
Pull in range available	AT	10-20	10-25	10-25	25-40
UL/ CSA/ RoHS		•/•/•	•/•/•	•/•/•	•/•/•
Packing unit	pcs.	3000	3000	5000	2500

AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47/48 for additional technical information. All dimensions in mm. Subject to change without prior notice.

T-Series

Features



Attractively priced alternative to molded Reed Switches

No PCB redesign required since direct substitute for molded competitors types



Various sensitivity ranges available





HSR-0025TSM

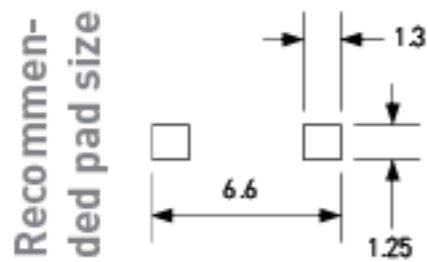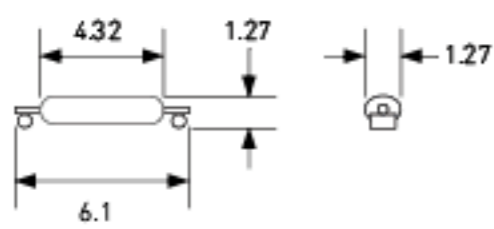



PMC-0701TS

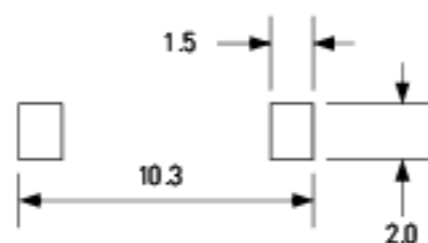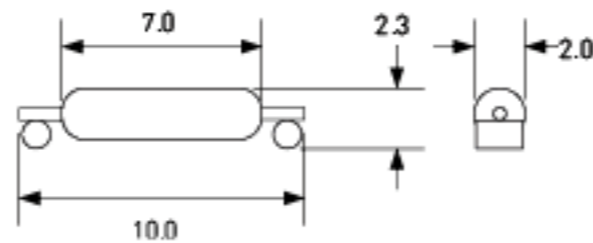



PMC-1001TS

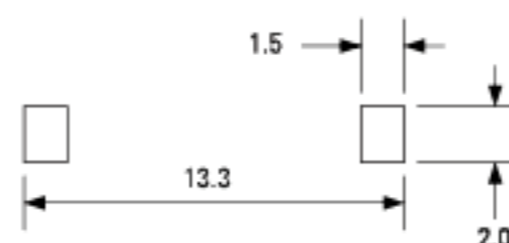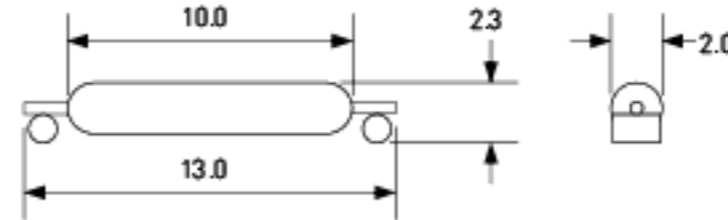


PMC-1001T

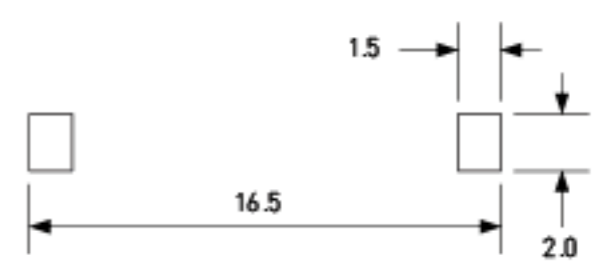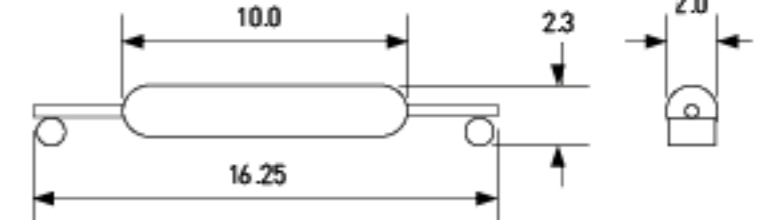


PMC-1401TS

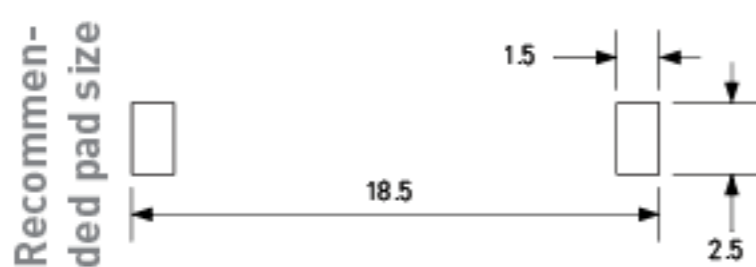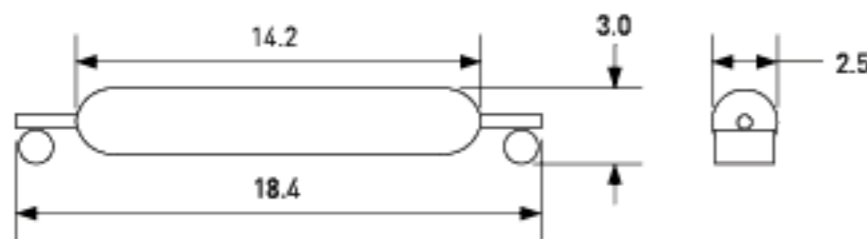

PMC-1401T

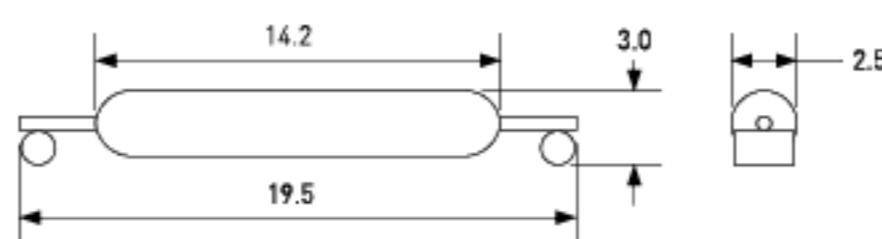

PMC-2021T

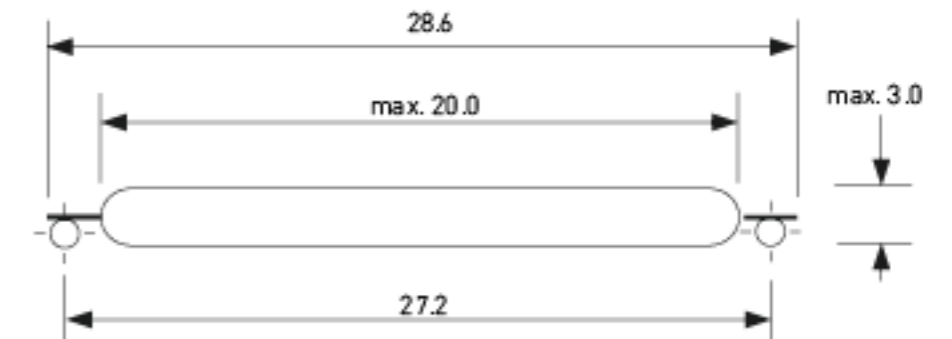


		HSR-0025TSM	PMC-0701TS	PMC-1001T/TS	PMC-1401T/TS	PMC-2021T
Contact form		A	A	A	A	A
Contact rating max.	W/VA	0.25	10	10	10	50
Switching current max.	A	0.01	0.5	0.7	1	1.5
Switching voltage max.	VDC	30	150	180	200	200
	VAC	20	120	130	140	250
Pull in range available	AT	5-15	10-20	10-25	10-25	25-40
UL/CSA/RoHS		--/--/•	•/•/•	•/•/•	•/•/•	•/•/•
Packing unit	pcs.	200	5000	5000	2500	2500

AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47/48 for additional technical information. All dimensions in mm. Subject to change without prior notice.


Z-Series

Features


- Designed to lay in PCB cut out
- Smallest height over PCB with only 0.45 mm for PMC-0701Z
- Improved mechanical protection for glass body

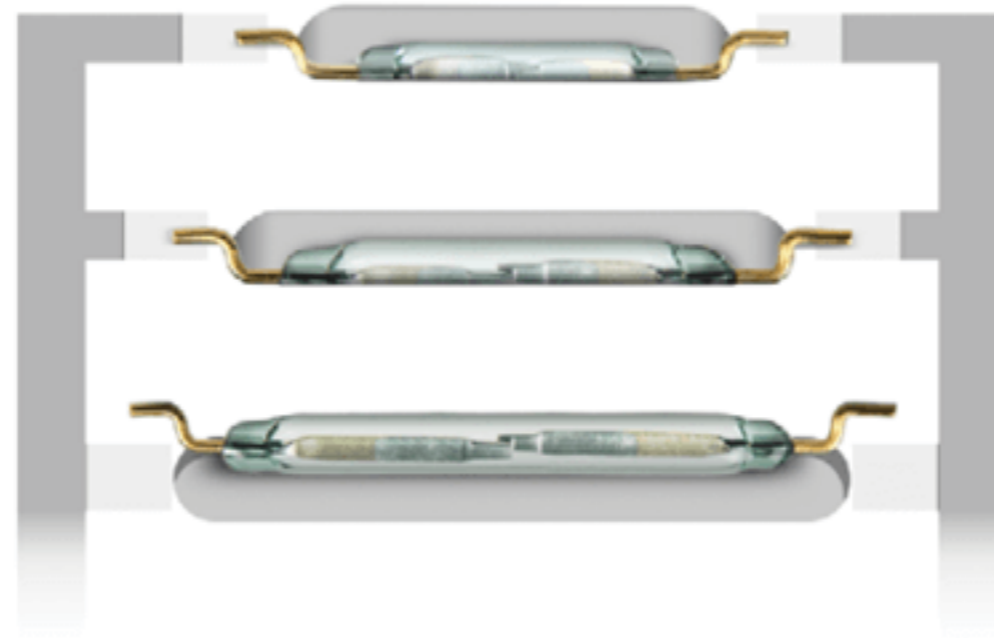


PMC-0701Z

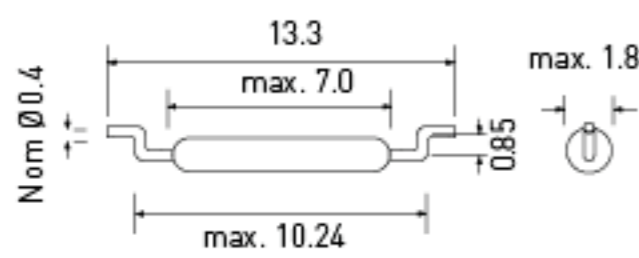


PMC-1001Z

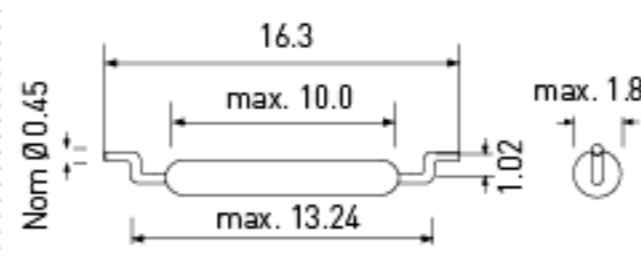





PMC-1401Z

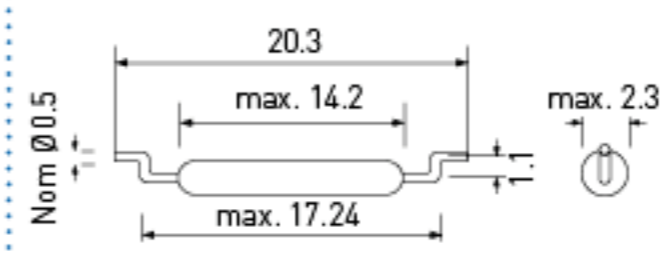



PMC-2021Z

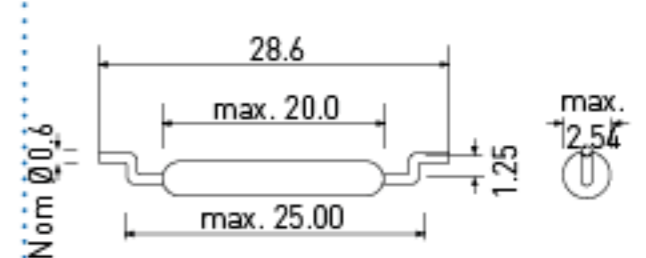

PCB cutout
Recommended pad size

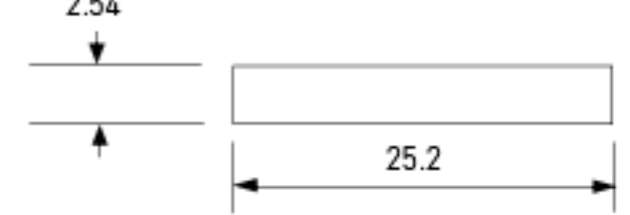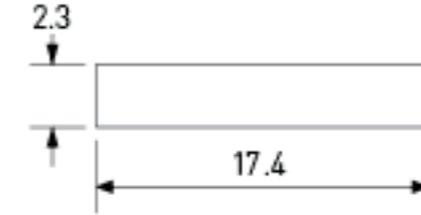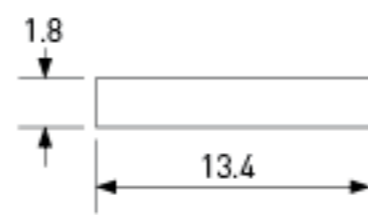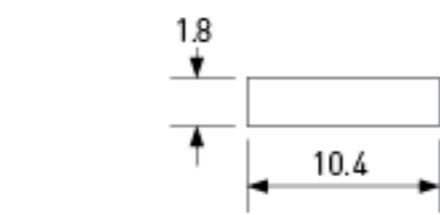

PMC-1001ZHL

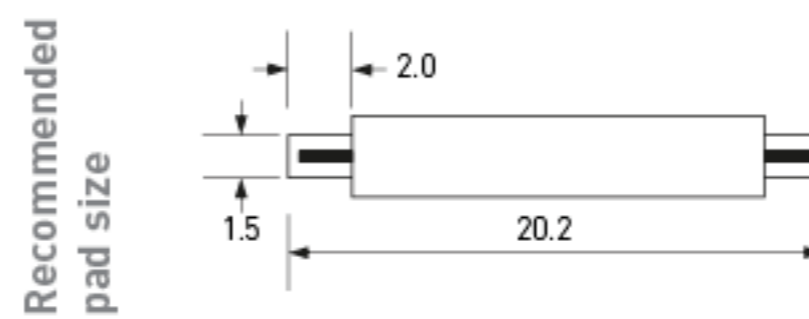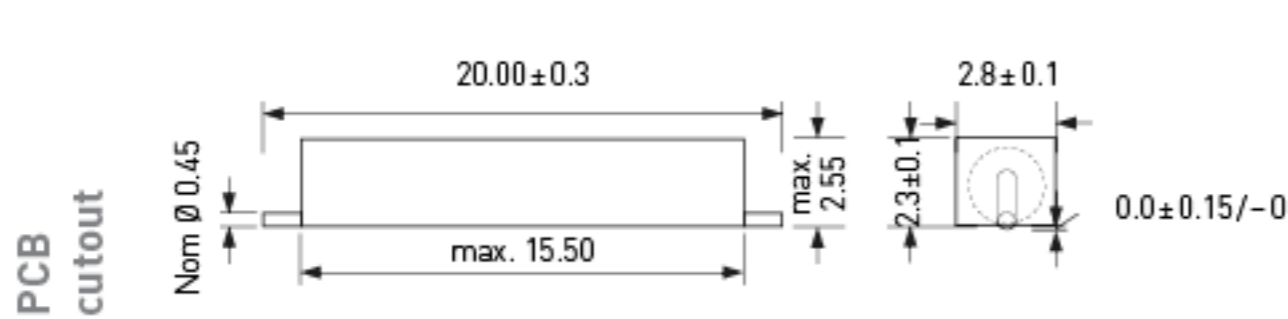

		PMC-0701Z	PMC-1001Z	PMC-1401Z	PMC-2021Z	PMC-1001ZHL
Contact form		A	A	A	A	A
Contact rating max.	W/VA	10	10	10	50	10
Switching current max.	A	0.5	0.7	1	1.5	0.7
Switching voltage max.	VDC	150	180	200	200	180
	VAC	120	130	140	250	130
Pull in range available	AT	10-20	10-25	10-25	25-40	10-25
UL/CSA/RoHS		--/--/•	--/--/•	--/--/•	--/--/•	--/--/•
Packing unit	pcs.	5000	5000	5000	2500	2500

AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47/48 for additional technical information. All dimensions in mm. Subject to change without prior notice.

TH-Series

Features


Replaces various molded competitors types, thus no PCB redesign required

Latching and Form B (normally closed) types available

Various sensitivity ranges available




PMC-0508TH

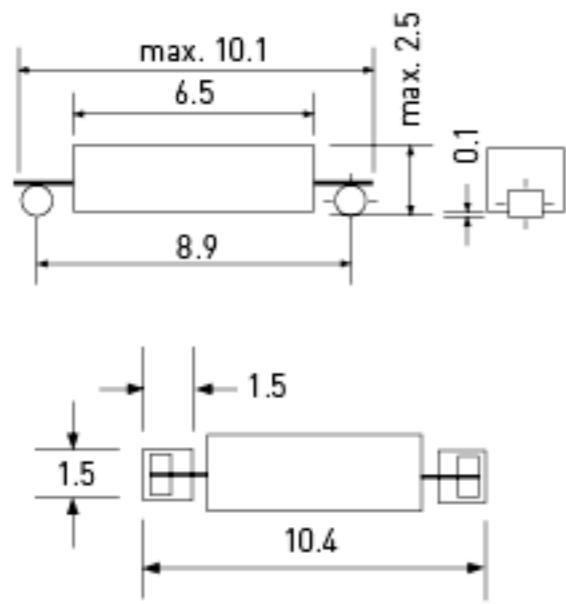


Recommended pad size


PMC-0701TH

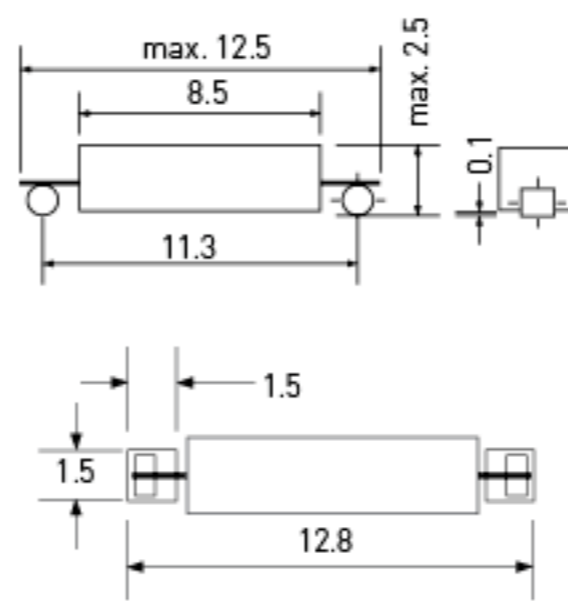

PMC-1001TH

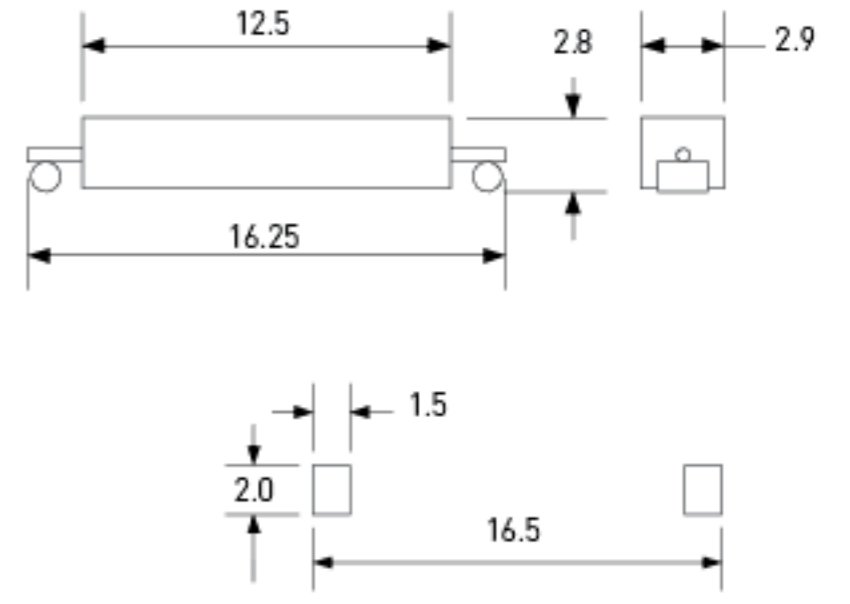


PMC-1001THL

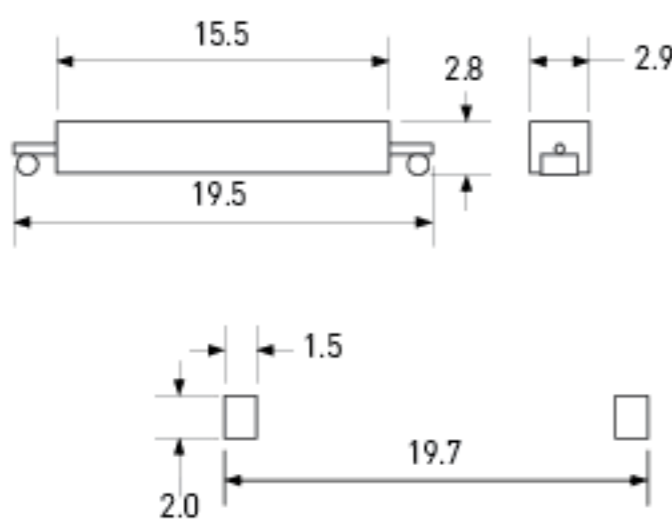


Recommended pad size

PMC-1001THY

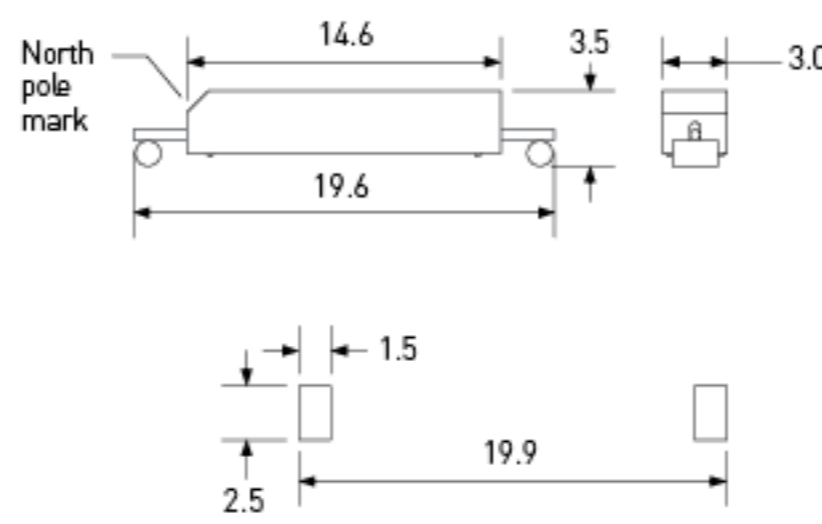

PMC-1424THX

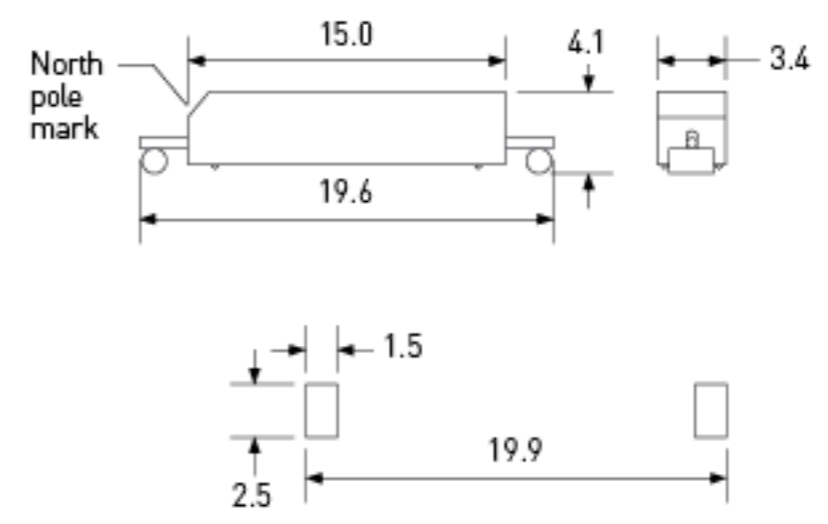

		PMC-0508TH	PMC-0701TH	PMC-1001TH PMC-1001THL	Normally closed PMC-1001THY	Latching PMC-1424THX
Contact form		A	A	A	B	E
Contact rating max.	W/VA	5	10	10	10	5
Switching current max.	A	0.25	0.5	0.7	0.7	0.5
Switching voltage max.	VDC	175	150	180	180	140
	VAC	140	120	130	130	100
Pull in range available	AT	5-15	10-20	10-25	consult factory	consult factory
UL/ CSA/ RoHS		--/--/•	•/•/•	•/•/•	•/•/•	•/•/•
Packing unit	pcs.	2500	2500	2500	2000	2000

AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47/48 for additional technical information. All dimensions in mm. Subject to change without prior notice.


PRX + 2-Series

Features



Ultra miniature size

Hi-Rel versions available



Various sensitivity ranges available

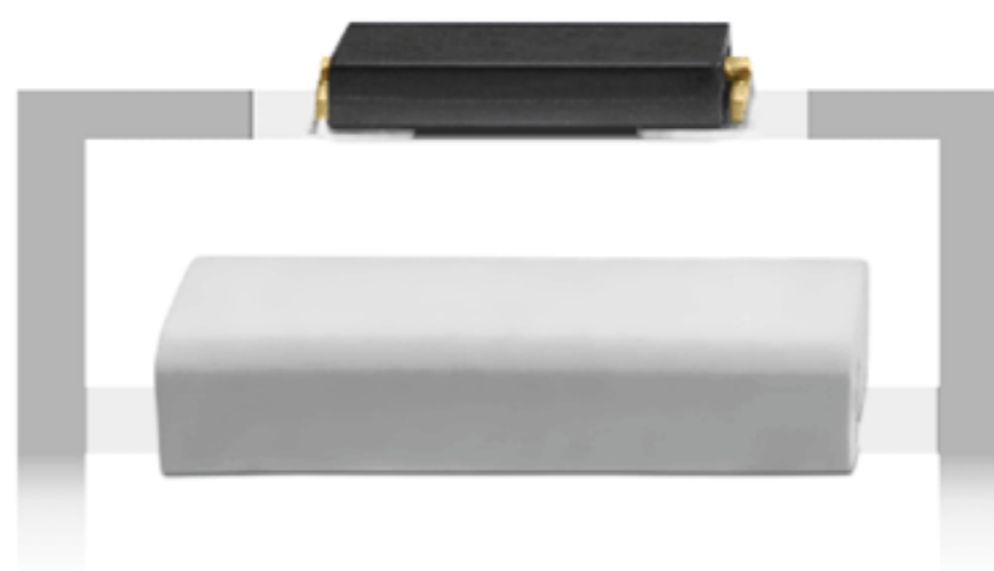

PRX+2463

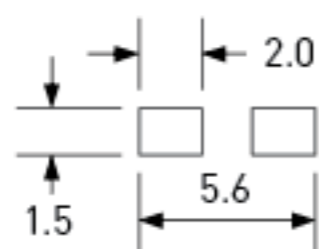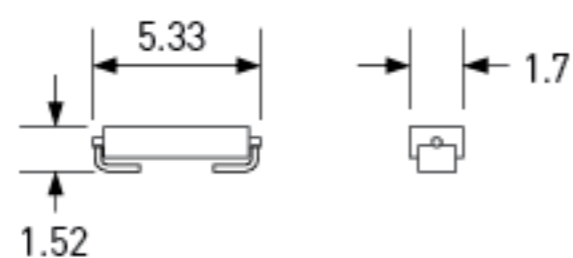

PRX+2131

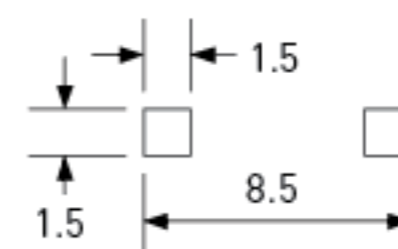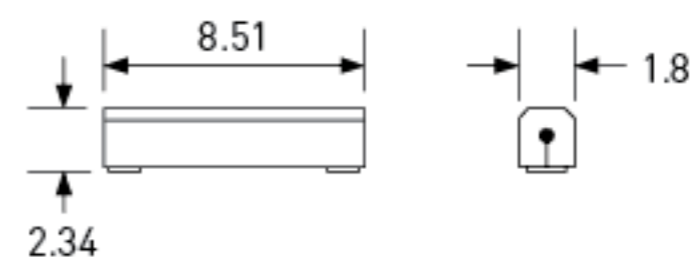

Recommended
pad size

		PRX+2463	PRX+2131
Contact form		A	A
Contact rating max.	W/VA	0.5	1
Switching current max.	A	0.01	0.05
Switching voltage max.	VDC	30	30
	VAC	20	30
Pull in range available	AT	5-15	5-20
UL/ CSA/ RoHS		--/--/•	--/--/•

AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47/48 for additional technical information. All dimensions in mm. Subject to change without prior notice.


Reed Chains

Features


Reliable signals

Individual level sensing


Build own solutions based on high quality switching elements

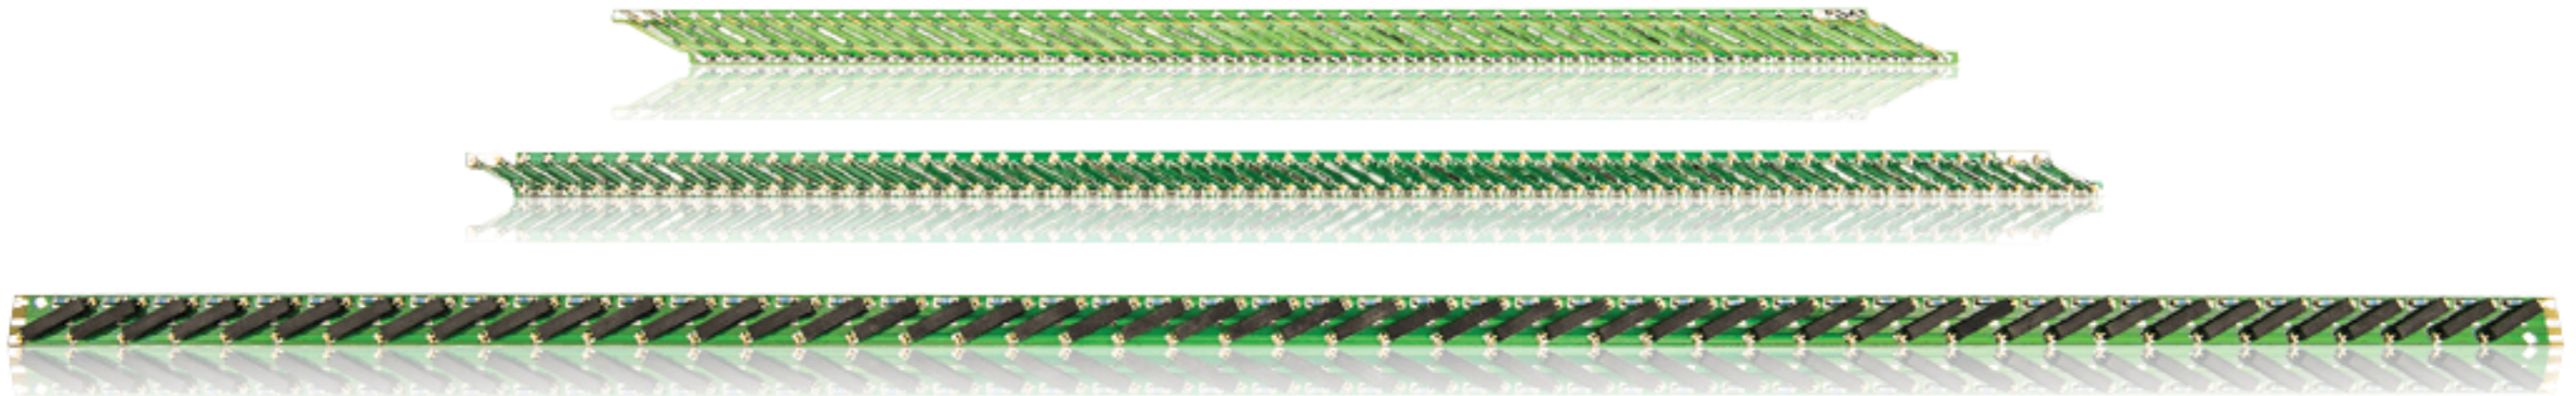


LP-XX01S25

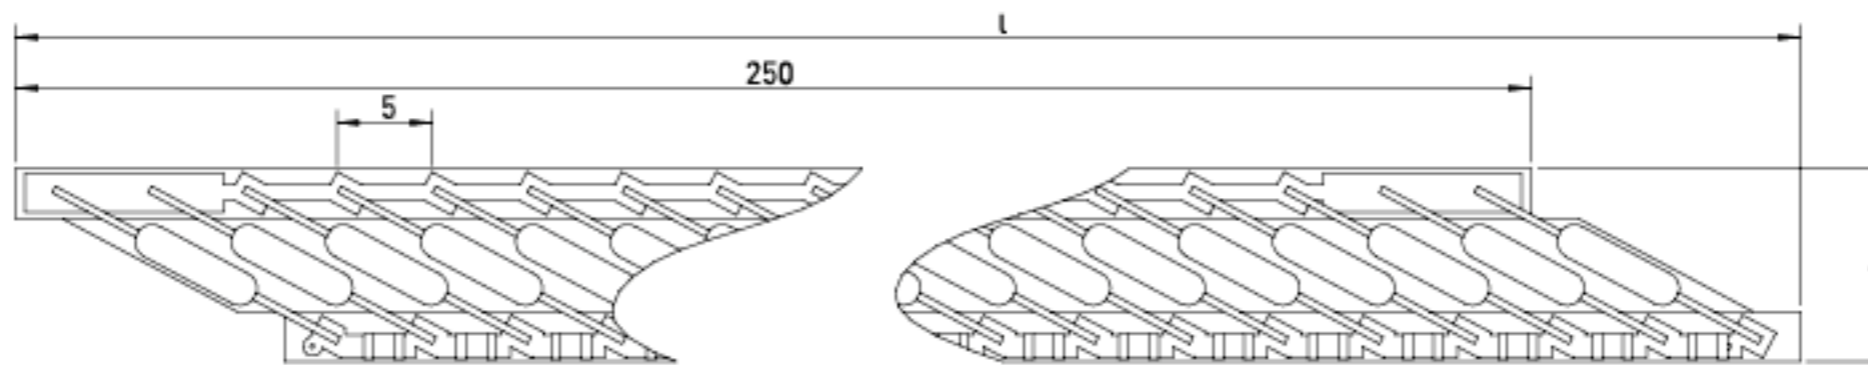

LP-XX01TS25

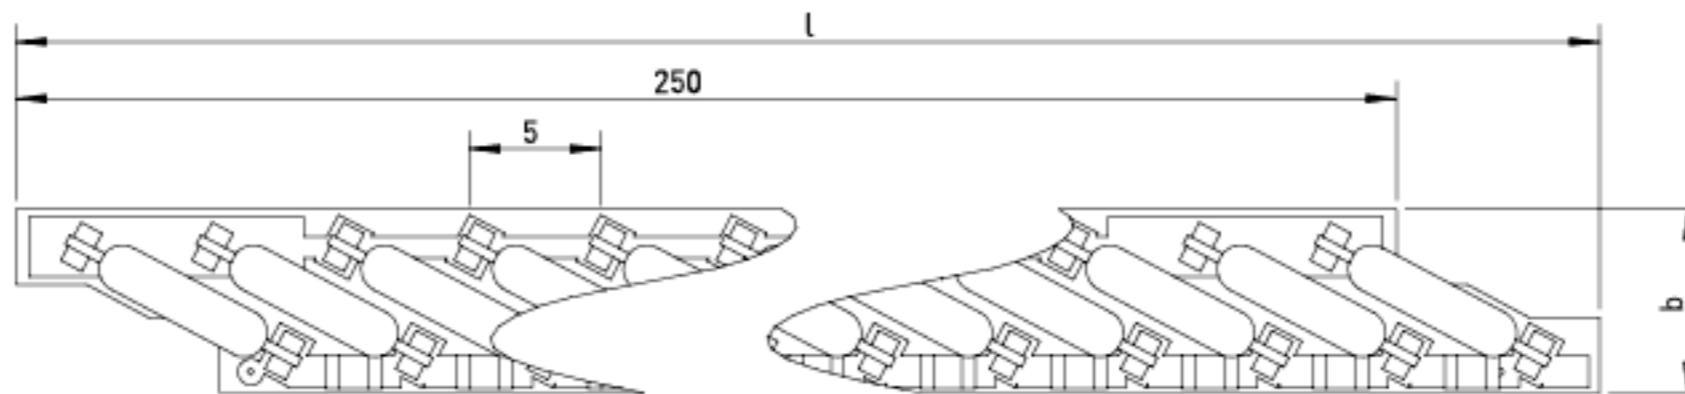

LP-1001TH50

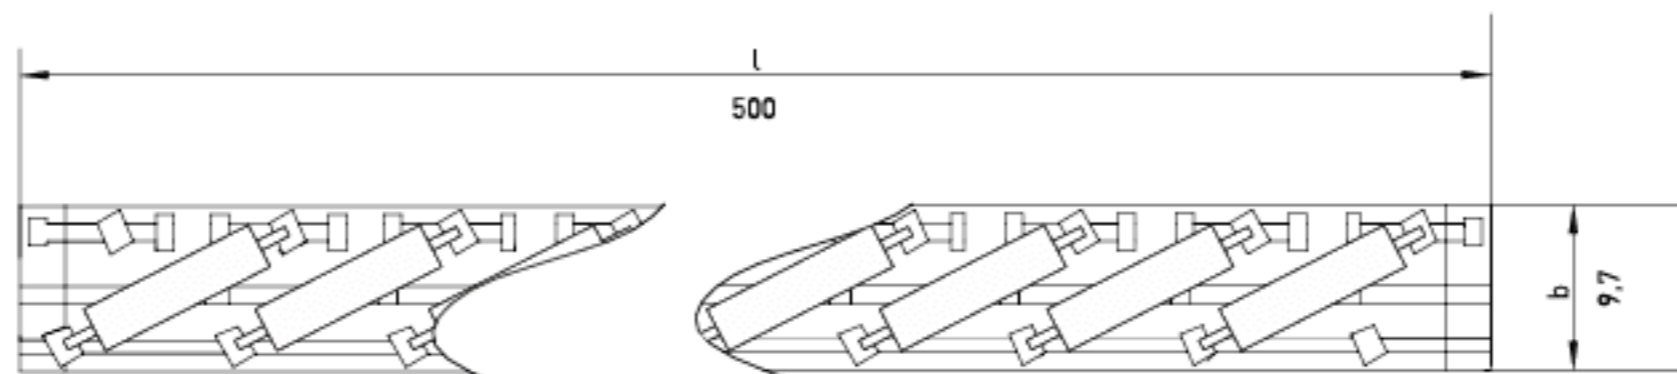


		LP-0701S	LP-1001S	LP-1401S	LP-0701TS	LP-1001TS	LP-1401TS	LP-1001TH
Contact rating max.	W	10	10	10	10	10	10	10
Switching current max.		0.5	0.7	1	0.5	0.7	1	0.7
Switching voltage max.	VDC	150	180	200	150	180	200	180
	VAC	120	130	140	120	130	140	130
Width b	mm	10.2	11.6	13.9	7	8.4	11.3	9.7
Length l	mm	264.2	266.8	271.2	257.8	260.4	265	500
Resistance	kOhm	1	1	1	1	1	1	0.5
UL/CSA/RoHS		--/--/•	--/--/•	--/--/•	--/--/•	--/--/•	--/--/•	--/--/•

Individual variations with more/fewer switching points, different resistance values and matching Floats are available - please contact us!

Reed Sensors


[Reed Switches with housing; simplified assembly, improved mechanical protection; actuation similar to a Reed Switch; existing in various forms (with cable / with connector / THT versions).]

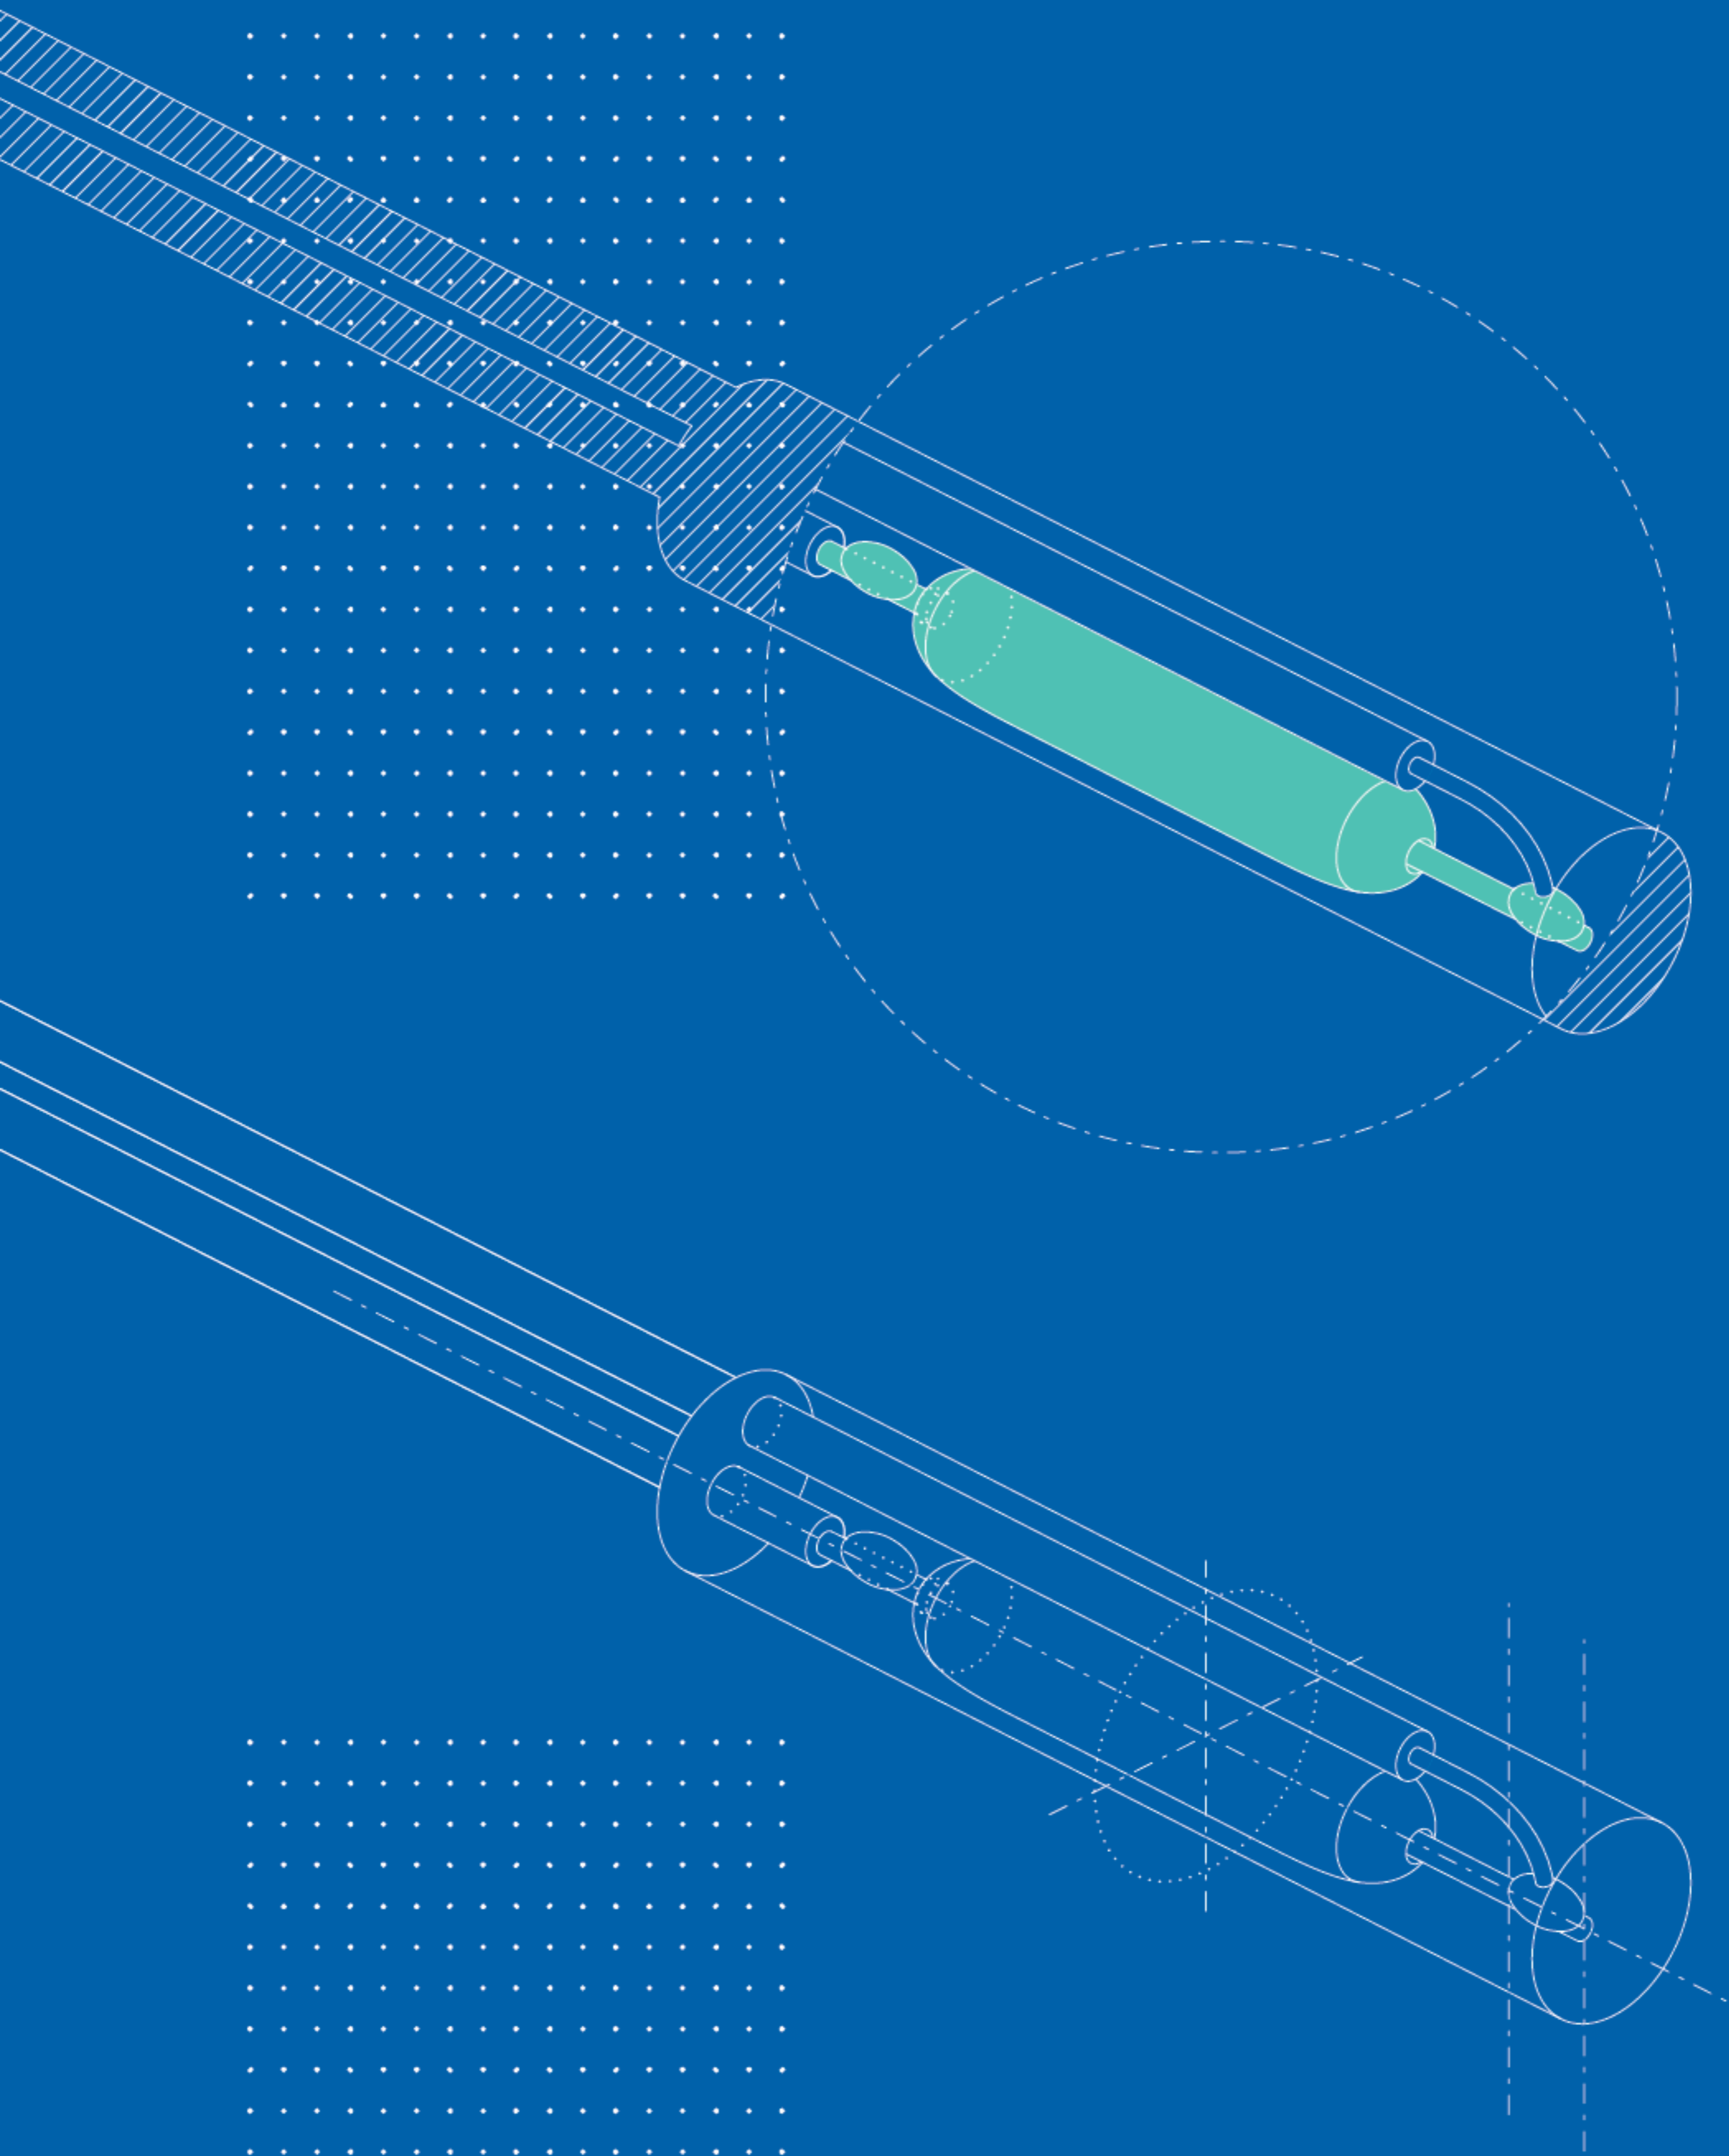

How does a Reed Sensor work?



A Reed Sensor incorporates a Reed Switch inside a metal or plastic housing for better mechanical protection and easier mounting. Actuation principles for Reed Switches also apply to Reed Sensors.

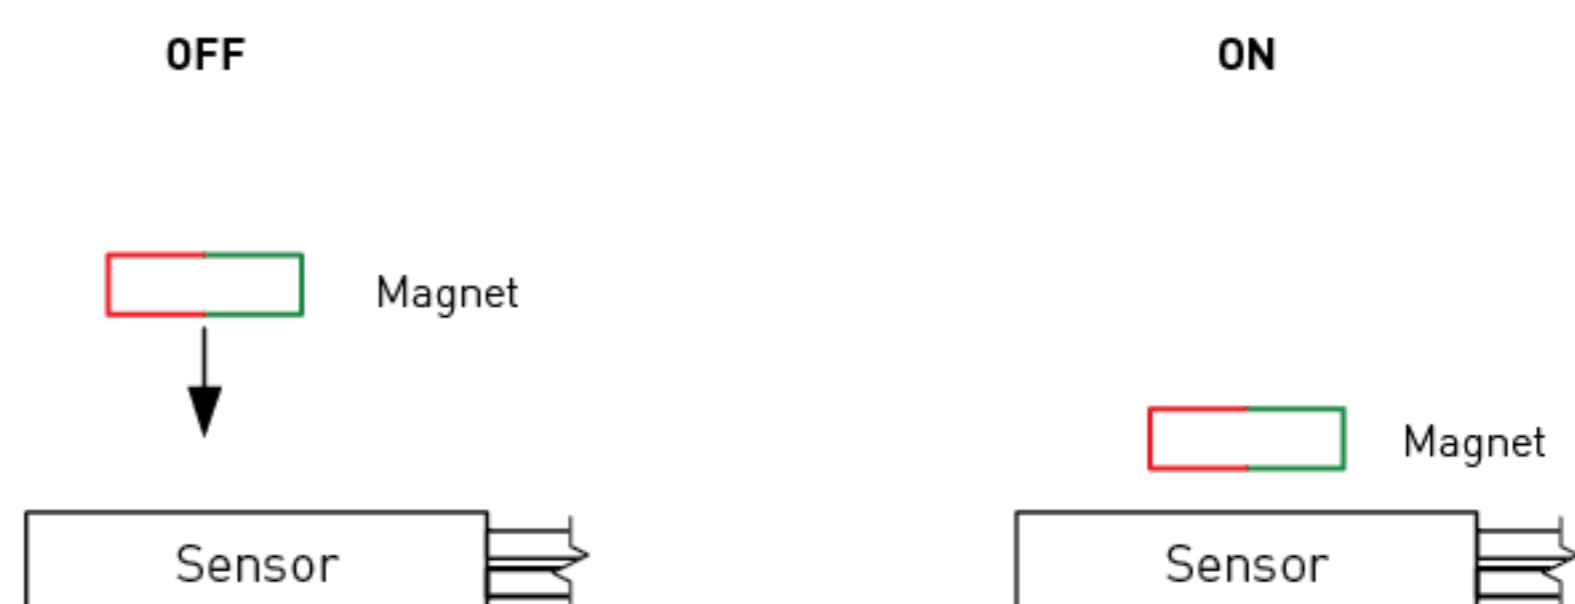

Benefits

- Mechanically protected
- Wide range of housing types available
- No power supply required
- Not ESD sensitive
- Non-touch actuation permits smooth surfaces and modern design
- Various sensitivity ranges available

Flatpack


Features

- Adjustable switching point
- Replaces various competitors types
- Mains voltage variants available
- Various sensitivity ranges available
- Customized types available




Standard types

MS-313-3

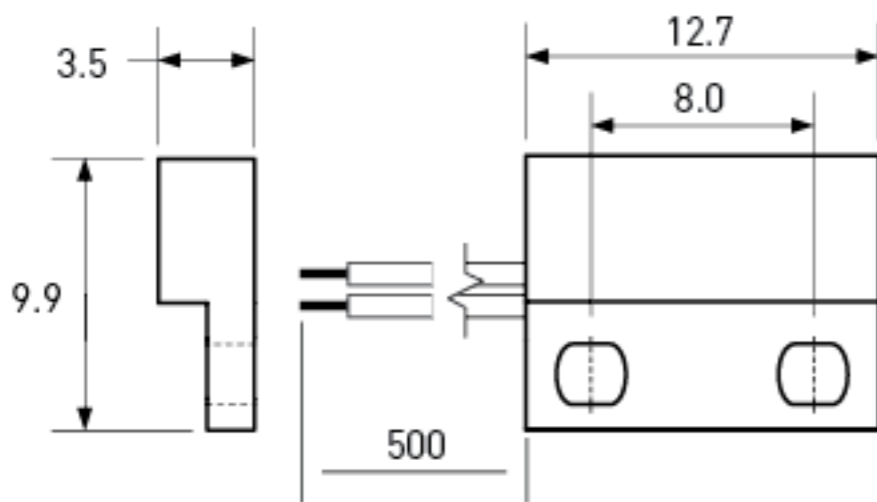


MS-324

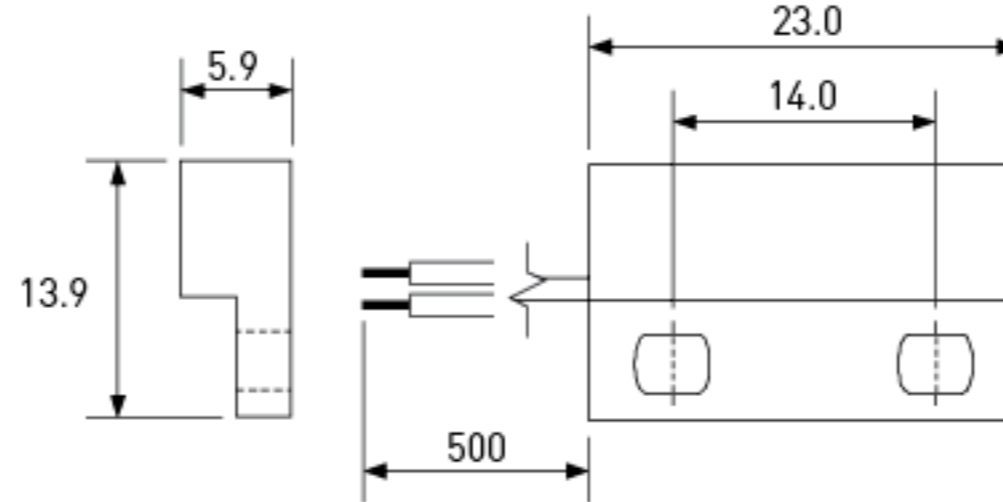


Cable exit:

MS-313R

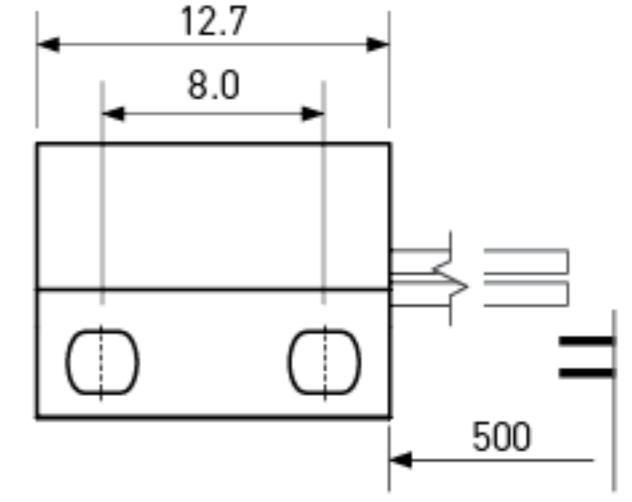

MS-324R

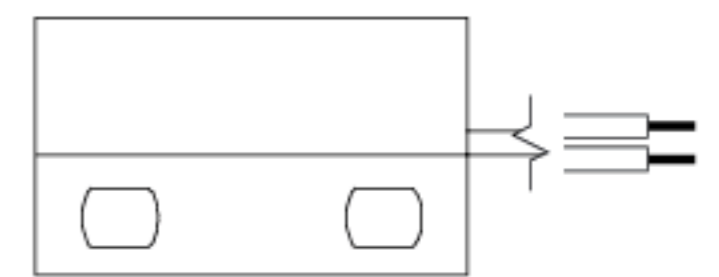

		MS-313-3	MS-324-3	MS-324-4	MS-324-5	MS-324-7
Contact form		A	A	C	A	B
Contact rating max.	W/VA	10	10	5	10	5
Switching current max.	A	0.5	1	0.25	0.3	0.25
Switching voltage max.	VDC	150	200	175	200	175
	VAC	120	140	120	260	120
Pull in range available	AT	10-20	10-25	15-30	15-30	15-30
Operating Temperature	°C	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85
UL/CSA/RoHS		--/--/•	•/•/•	•/•/•	•/•/•	•/•/•
Housing material		ABS	ABS			
Cable type		AWG 26	AWG 24 (MS-324-4,MS-324-7: AWG 26)			


AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47 - 49 for additional technical information. All dimensions in mm. Subject to change without prior notice.

Flatpack




Standard types

MS-328

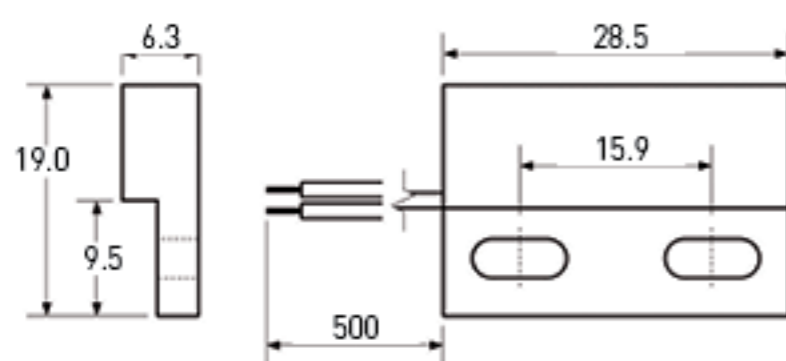


MS-332

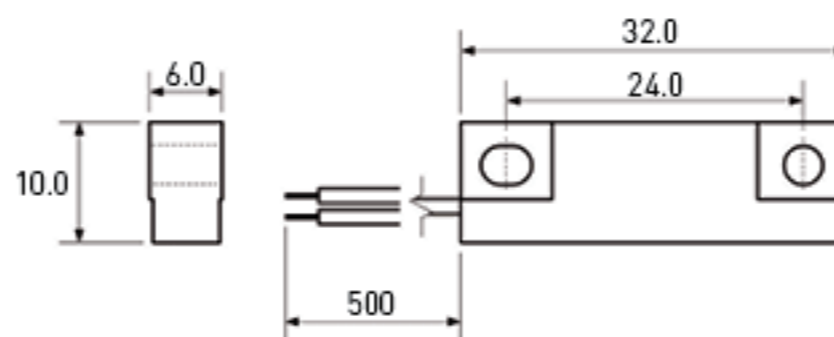

Cable exit:

MS-332R

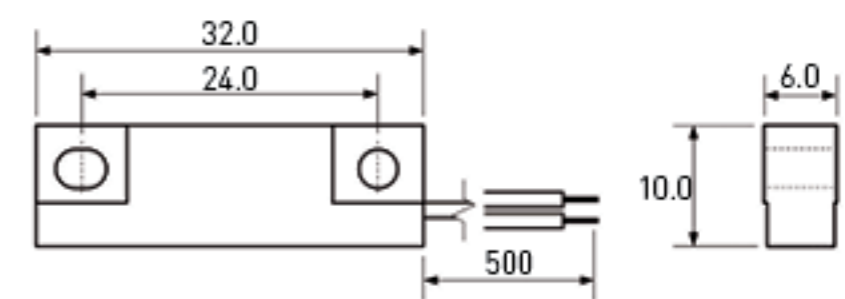

		MS-328-3 MS-332-3	MS-328-4	MS-328-5 MS-332-5	MS-328-6 MS-332-6	MS-328-7 MS-332-7
Contact form		A	C	A	A	B
Contact rating max.	W/VA	10	5	10	50	5
Switching current max.	A	1	0.25	0.3	1.5	0.25
Switching voltage max.	VDC	200	175	200	200	175
	VAC	140	120	260	250	120
Pull in range available	AT	10-25	15-30	15-30	25-40	15-30
Operating Temperature	°C	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85
UL/CSA/RoHS		•/•/•	•/•/•	•/•/•	•/•/•	•/•/•
Housing material		PA-GF ABS	PA-GF	PA-GF ABS	PA-GF ABS	PA-GF ABS
Cable type		AWG 20	AWG 22	AWG 24	AWG 24	AWG 24

Matching actuators on page 34.

AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47 - 49 for additional technical information. All dimensions in mm. Subject to change without prior notice.


Through Hole

Features


- Pitch ranging from 2.54 to 20.32 mm
- Mechanically protected
- Replaces various competitors types
- MK sensor with integrated resistor
- Mains voltage variants available
- Customized types available




MS-104

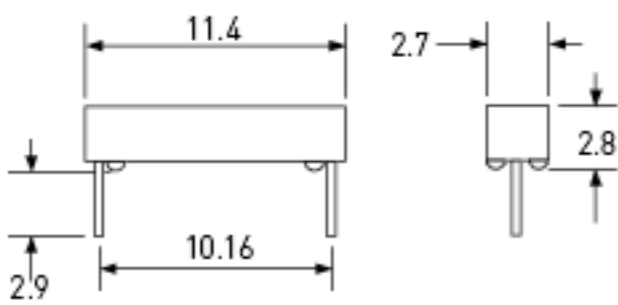


MS-105

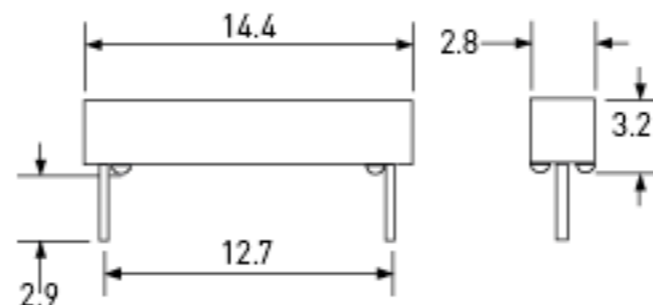


MS-106

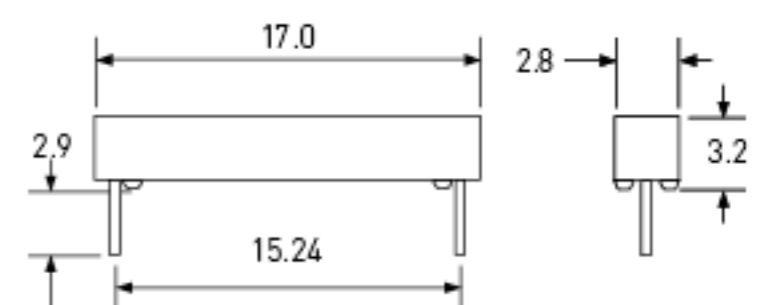


MS-107

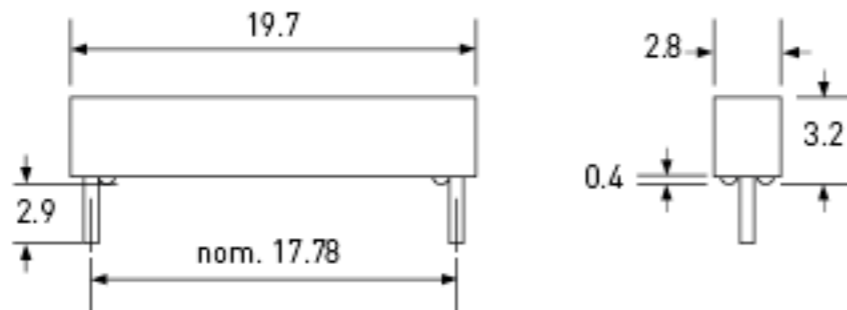


MS-108

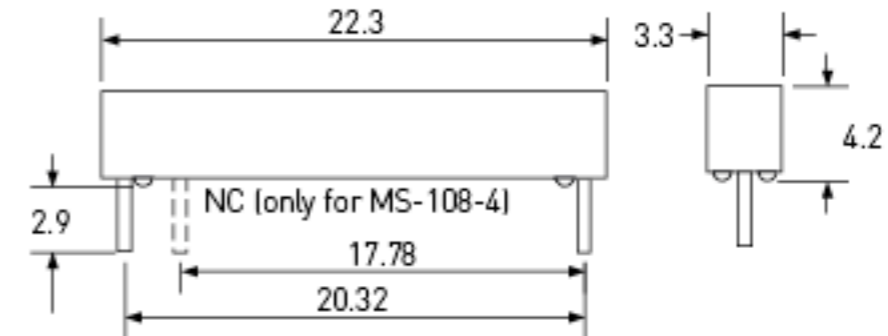

MS-110X

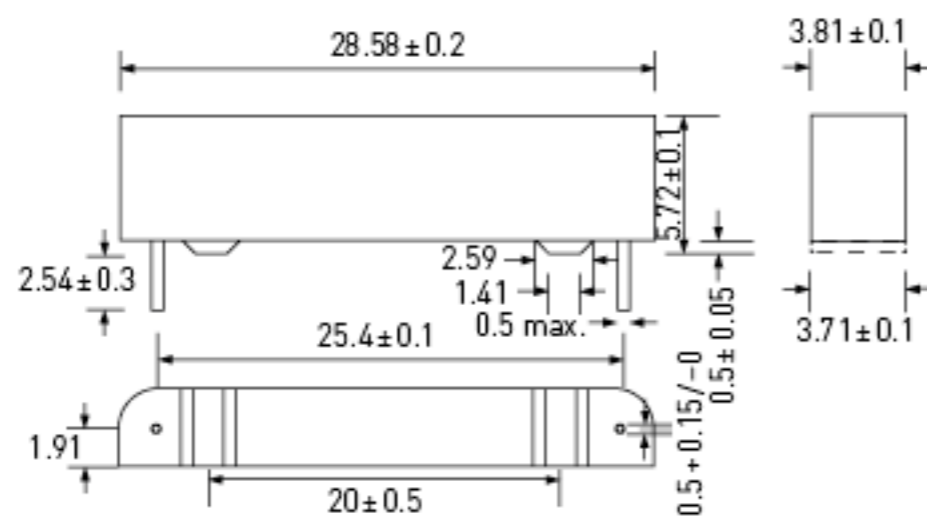

MK with integrated resistor

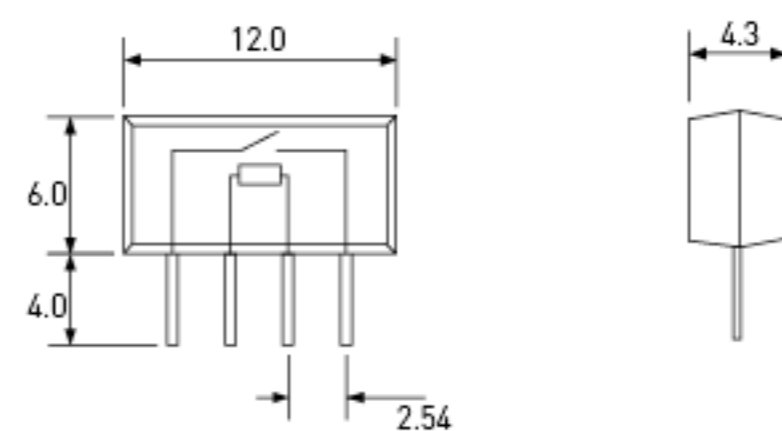

		MS-104 MS-105	MS-106 MS-107	MS-108-3	MS-108-4	MS-108-5	MS-110X	MK
Contact form		A	A	A	C	A	E	A
Contact rating max.	W/VA	10	10	10	5	10	5	10
Switching current max.	A	0.5	0.7	1	0.25	0.3	0.5	0.5
Switching voltage max.	VDC	150	180	200	175	200	140	150
	VAC	120	130	140	120	260	100	120
Pull in range available	AT	10-20	10-25	10-25	15-30	15-30	consult factory	10-15
Operating Temperature	°C	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-40 to +125
UL/ CSA/ RoHS		•/•/•	•/•/• --/--/•	•/•/•	•/•/•	•/•/•	--/--/•	--/--/•

AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47 - 49 for additional technical information. All dimensions in mm. Subject to change without prior notice.

Features

Replaces various competitors types


Mains voltage variants available

Various sensitivity ranges available


Customized types available




PRX+1500

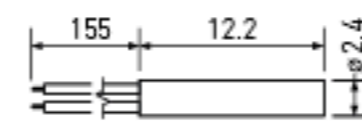


MS-208

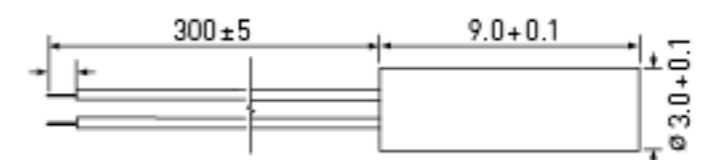


MS-209

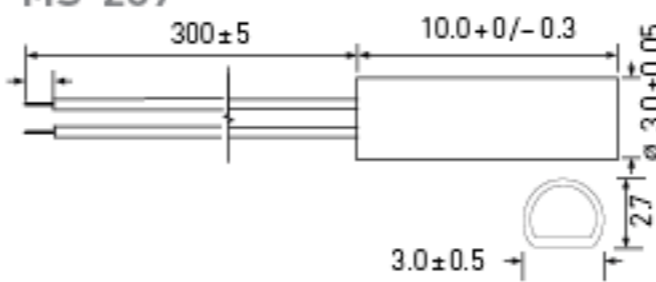


MS-210

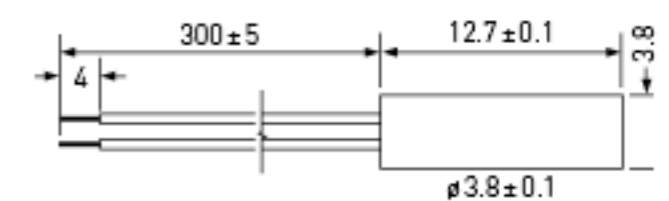

MS-211

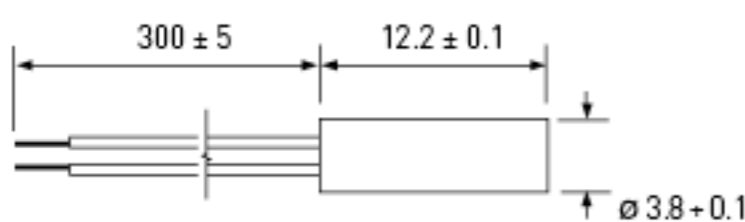


MS-213

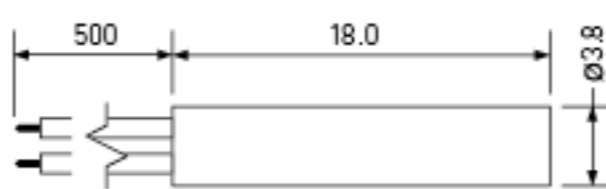


MS-214




MS-215

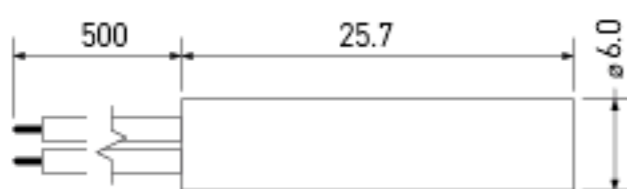

MS-216

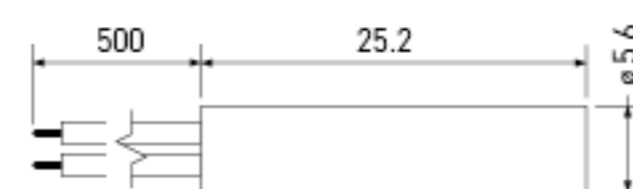

MS-217

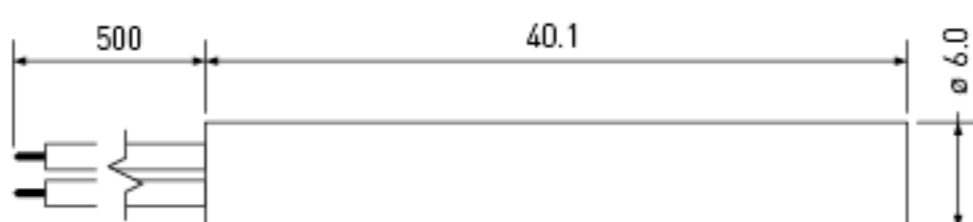






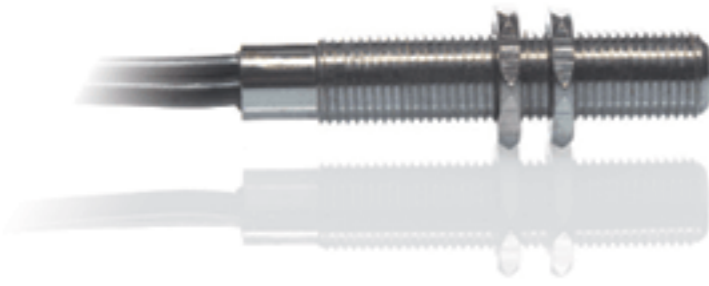
		PRX+1500	MS-208	MS-209	MS-210	MS-211	MS-213	MS-214	MS-215-3	MS-215-4	MS-215-5	MS-217-6	MS-215-7	MS-216-7	MS-217-7	
Contact form		A	A	A	A	A	A	A	A	C	A	A	B			
Contact rating max.	W/VA	1	5	10	10	10	10	10	10	5	10	50	5			
Switching current max.	A	0.05	0.35	0.5	0.5	0.5	0.7	0.7	1	0.25	0.3	1.5	0.25			
Switching voltage max.	VDC	30	175	150	150	150	180	180	200	175	200	200	175			
	VAC	30	140	120	120	120	130	130	140	120	260	250	120			
Pull in range available	AT	10-25	5-15	10-20	10-20	10-20	10-25	10-25	10-25	15-30	15-30	25-40	15-30			
Operating Temperature	°C	-40 to +125	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85			
UL/CSA/RoHS		-/-/•	-/-/•	-/-/•	-/-/•	-/-/•	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•			
Housing material		HTM						ABS								
Cable type		AWG 28	AWG 30	AWG 30	AWG 26	AWG 26	AWG 26	AWG 26	AWG 24	AWG 24	AWG 24	AWG 24	AWG 24	AWG 24	AWG 24	

AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47-49 for additional technical information. All dimensions in mm. Subject to change without prior notice.



Tubular Threaded

Features


-  Adjustable switching point
-  Replaces various competitors types
-  Mains voltage variants available
-  Various sensitivity ranges available
-  Customized types available



MS-225

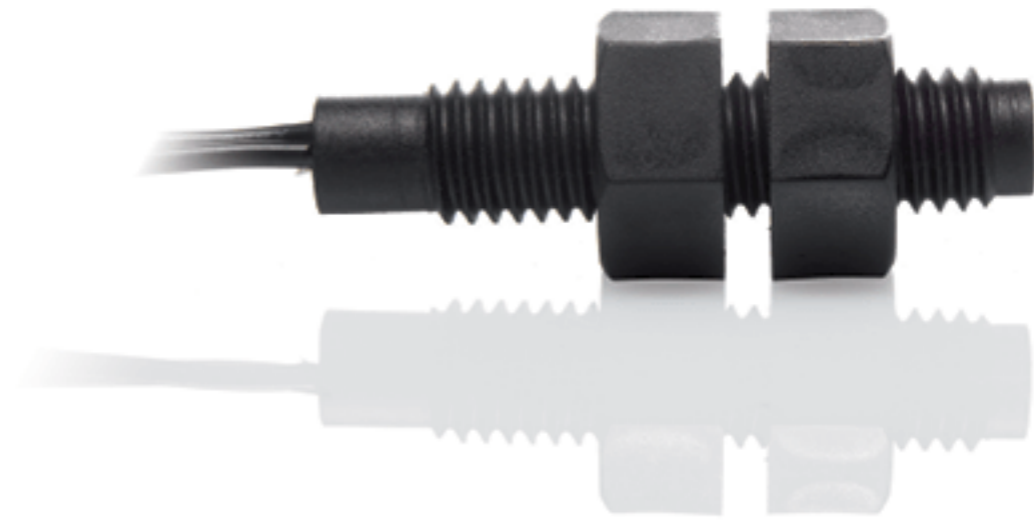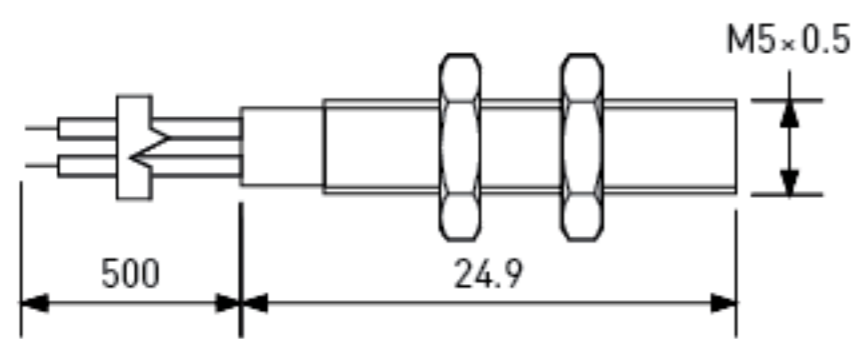

MS-228

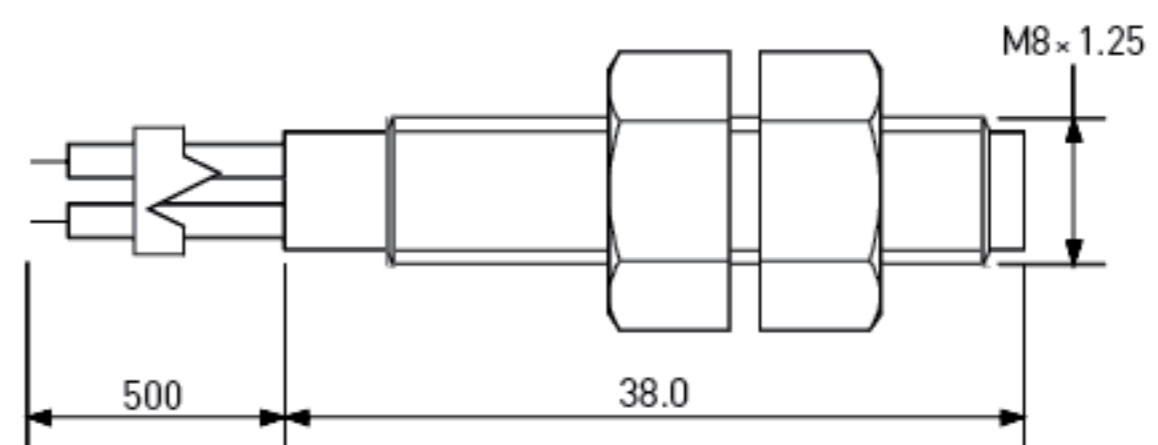

		MS-225	MS-228-3	MS-228-4	MS-228-5	MS-228-6	MS-228-7
Contact form		A	A	C	A	A	B
Contact rating max.	W/VA	10	10	5	10	50	5
Switching current max.	A	1	1	0.25	0.3	1.5	0.25
Switching voltage max.	VDC	180	200	175	200	200	175
	VAC	130	140	120	260	250	120
Pull in range available	AT	10-25	10-25	15-30	15-30	25-40	15-30
Operating Temperature	°C	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85
UL/CSA/RoHS		•/•/•	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•
Housing material		Nickel plated brass	PA6-GF	PA6-GF	PA6-GF	PA6-GF	PA6-GF
Cable type		AWG 28	AWG 24	AWG 24	AWG 24	AWG 24	AWG 24


Matching actuators on page 35.

AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47 - 49 for additional technical information. All dimensions in mm. Subject to change without prior notice.



Tubular Threaded

Features


- Adjustable switching point
- Rugged design

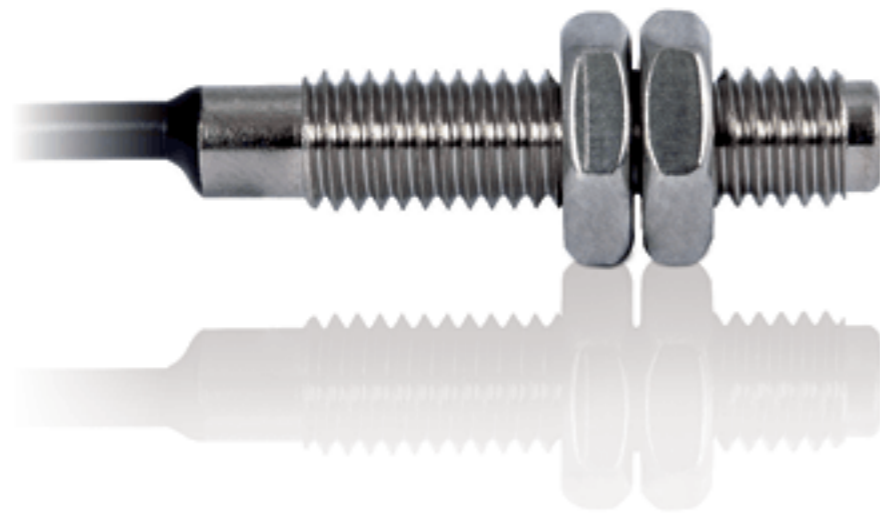


MS-226M

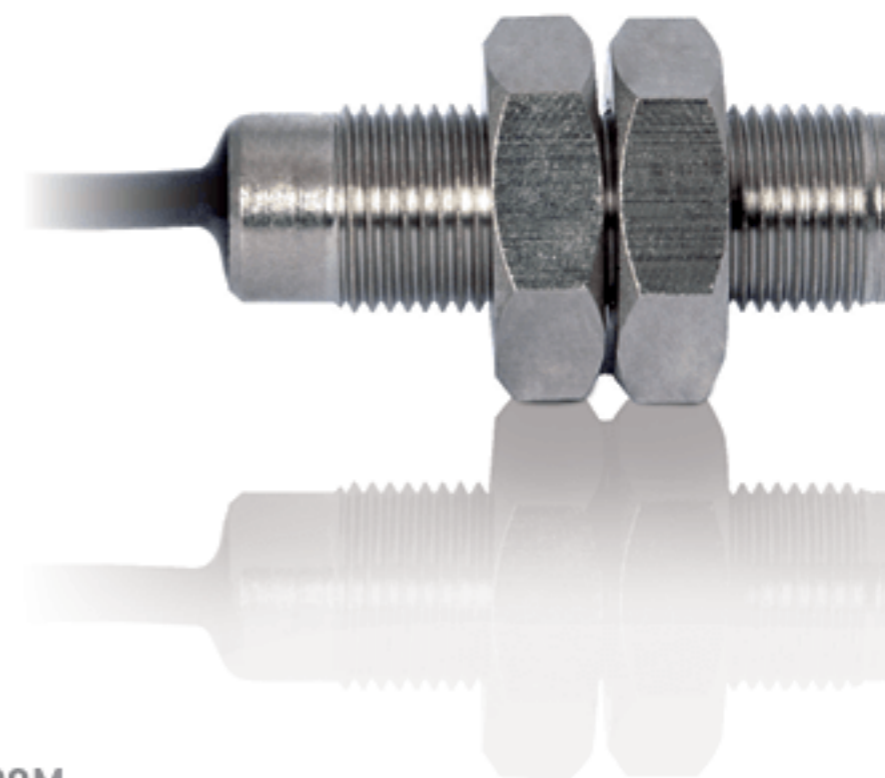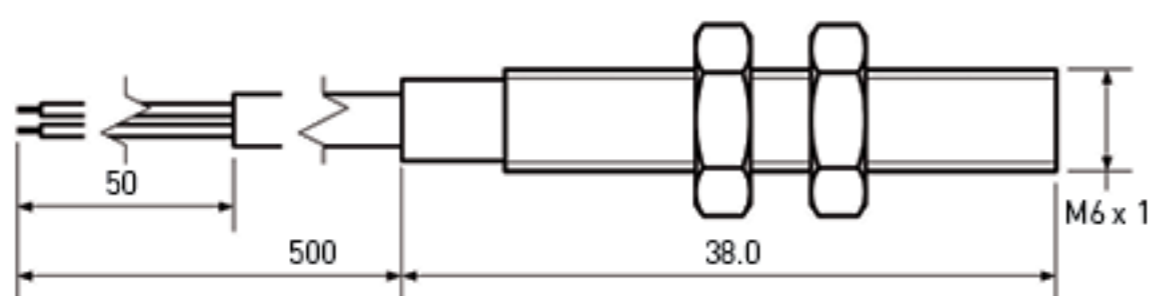


MS-228M

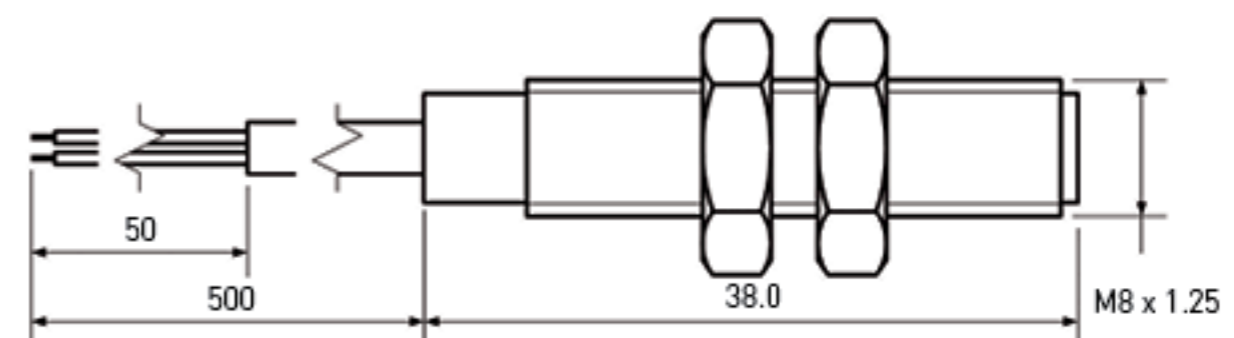

MS-2210M

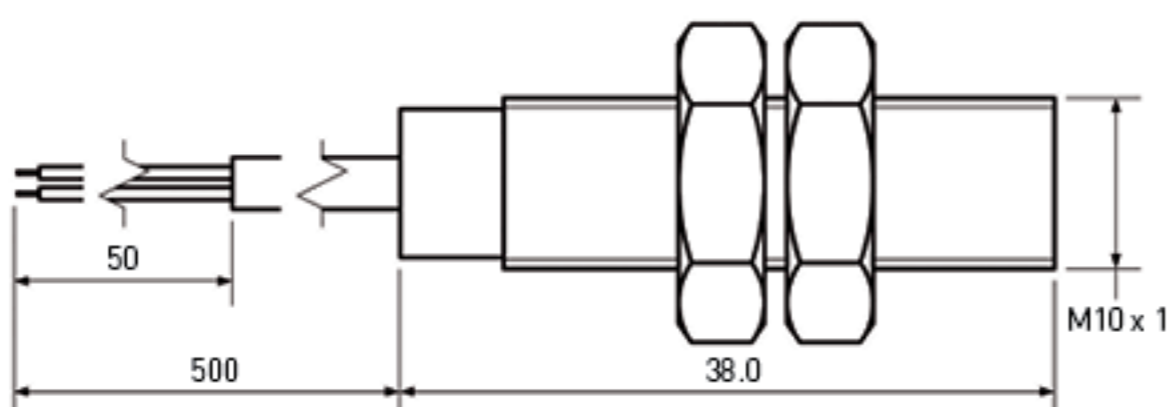

MS-2212M

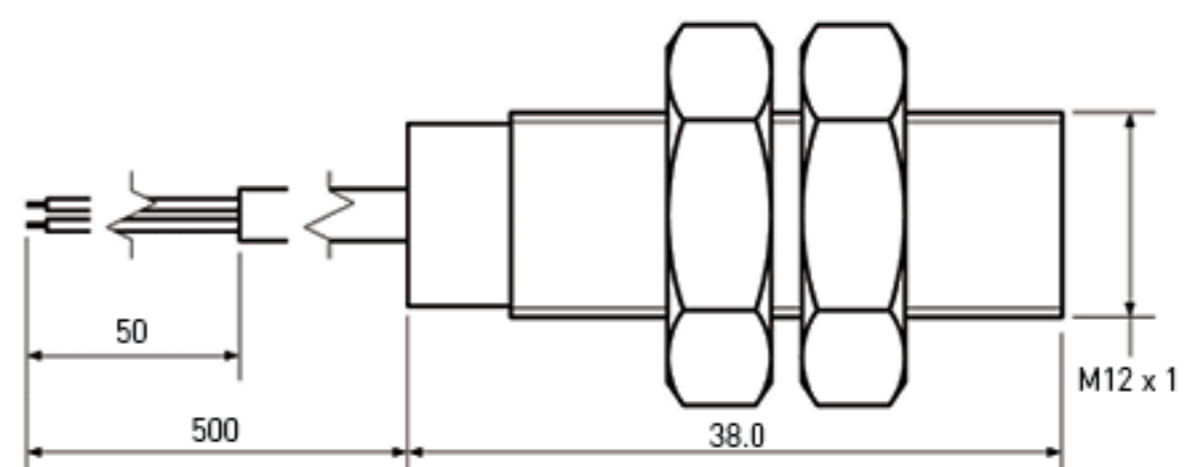

		Power Switch	
		MS-226M-3 MS-228M-3 MS-2210M-3 MS-2212M-3	MS-228M-6 MS-2210M-6 MS-2212M-6
Contact form		A	A
Contact rating max.	W/VA	10	50
Switching current max.	A	1	1.5
Switching voltage max.	VDC	200	200
	VAC	140	250
Pull in range available	AT	10-25	25-40
Operating Temperature	°C	-20 to +85	-20 to +85
UL/CSA/RoHS		--/--/•	--/--/•
Housing material		Nickel plated brass	Nickel plated brass
Cable type		AWG 24 (MS-226M-3: AWG 28)	AWG 24

Matching actuators on page 35.

AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47 - 49 for additional technical information. All dimensions in mm. Subject to change without prior notice.

Press-fit

Features


Easily mountable, no tools or screws required

Various sensitivity ranges available

Customized sizes and diameters available



MS-2431

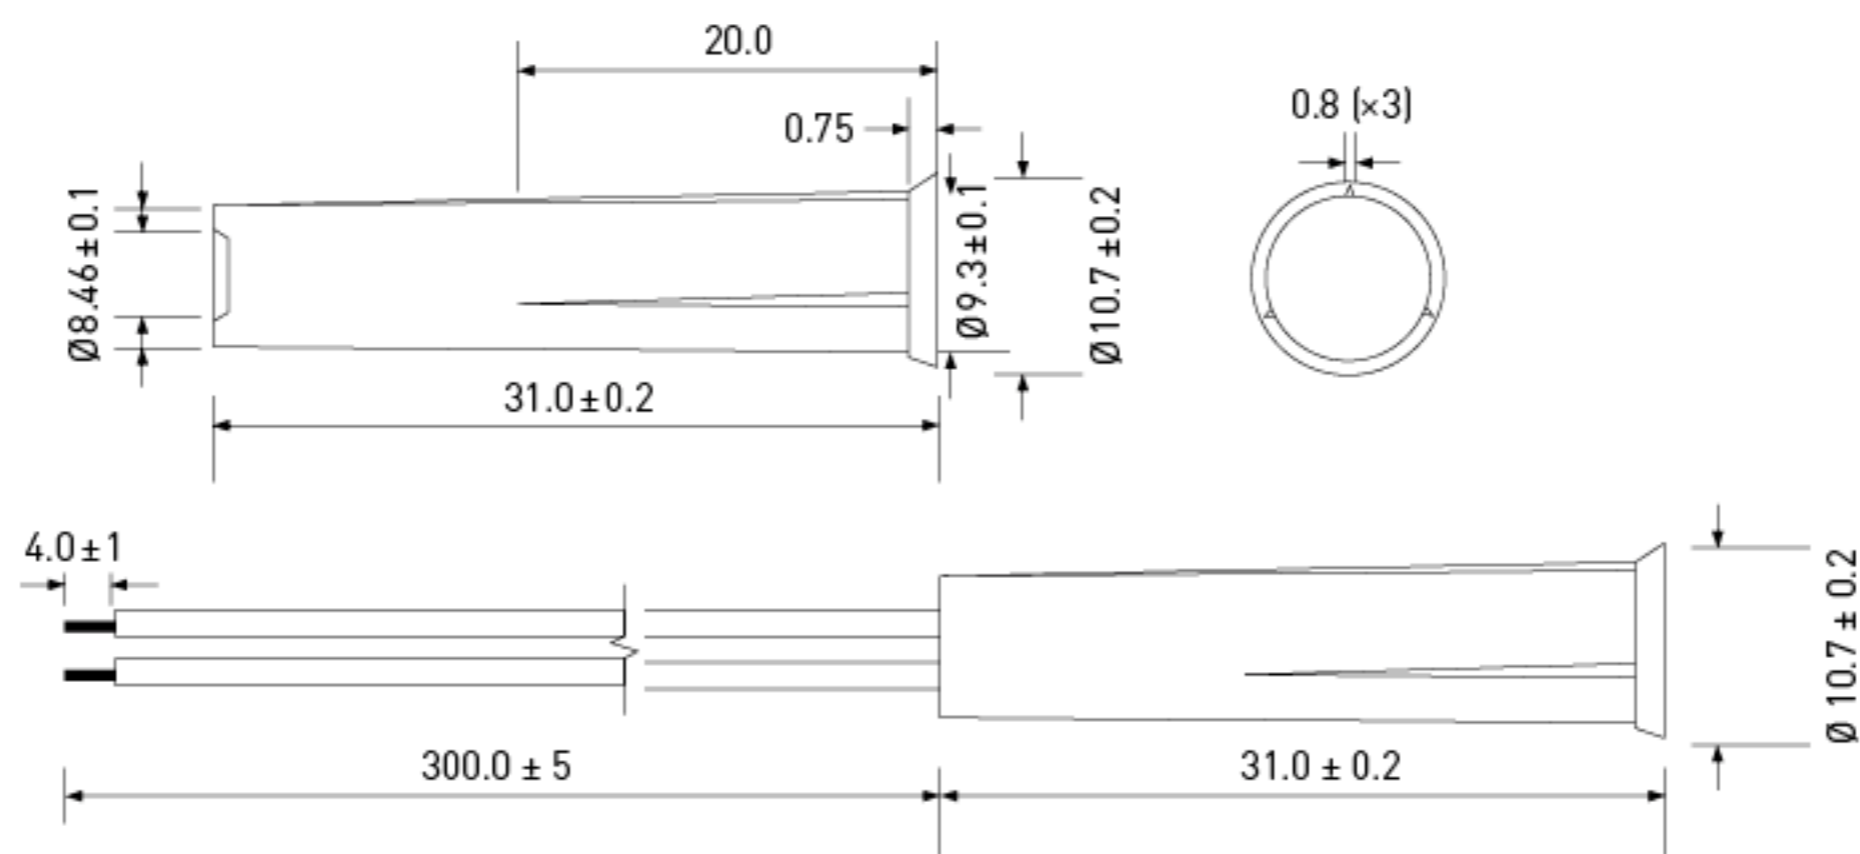

		MS-2431-3	MS-2431-4	MS-2431-7
Contact form		A	C	B
Contact rating max.	W/VA	10	3	3
Switching current max.	A	1	0.2	0.2
Switching voltage max.	VDC	200	30	30
	VAC	140	30	30
Pull in range available	AT	10–25	10–30	10–30
Operating Temperature	°C		–20 to +85	
UL/CSA/RoHS			--/--/•	
Housing material			PA-GF	
Cable type			AWG 24	


Matching actuators on page 34.

Features


- ▣ Easily mountable and removable as no tools or screws required
- ▣ Small size
- ▣ Various sensitivity ranges available
- ▣ Customized types available



MS-320

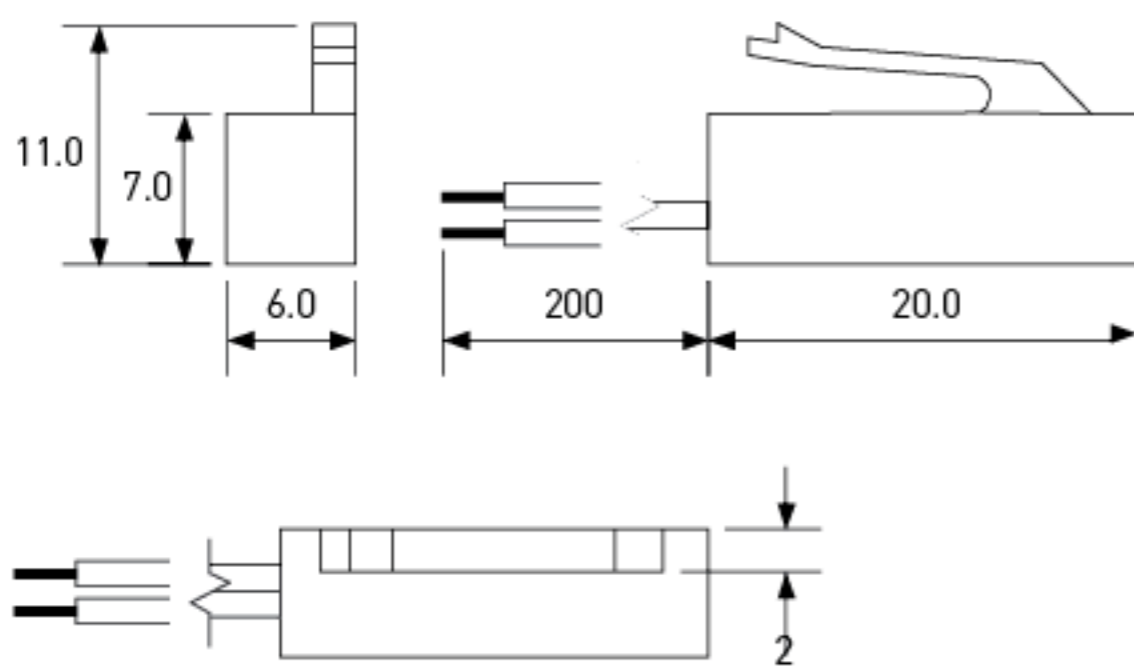

MS-390


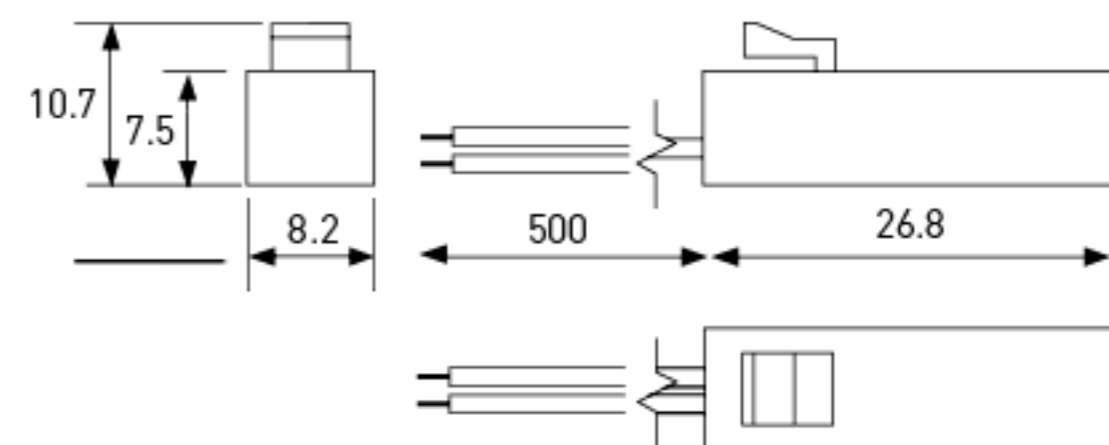


		MS-320	MS-390-3	MS-390-4	MS-390-5
Contact form		A	A	C	A
Contact rating max.	W/VA	10	10	5	10
Switching current max.	A	0.7	1	0.25	0.3
Switching voltage max.	VDC	180	200	175	200
	VAC	130	140	120	260
Pull in range available	AT	10-25	15-30	15-30	15-30
Operating Temperature	°C	- 20 to +85			
UL/CSA/RoHS		•/•/•		--/--/•	
Housing material		PA-GF		PC	
Cable type		AWG 22	AWG 22	AWG 24	AWG 22


AT ranges and characteristics stated for unmodified Reed Switches. Pls. refer page 47 - 49 for additional technical information. All dimensions in mm. Subject to change without prior notice.

Hall Sensors



[Hall-Effect-ICs, used as Sensors with housing, cable and eventually connector; allowing high switching frequencies and more switching cycles than Reed Switches; especially suitable for continuous counting applications.]

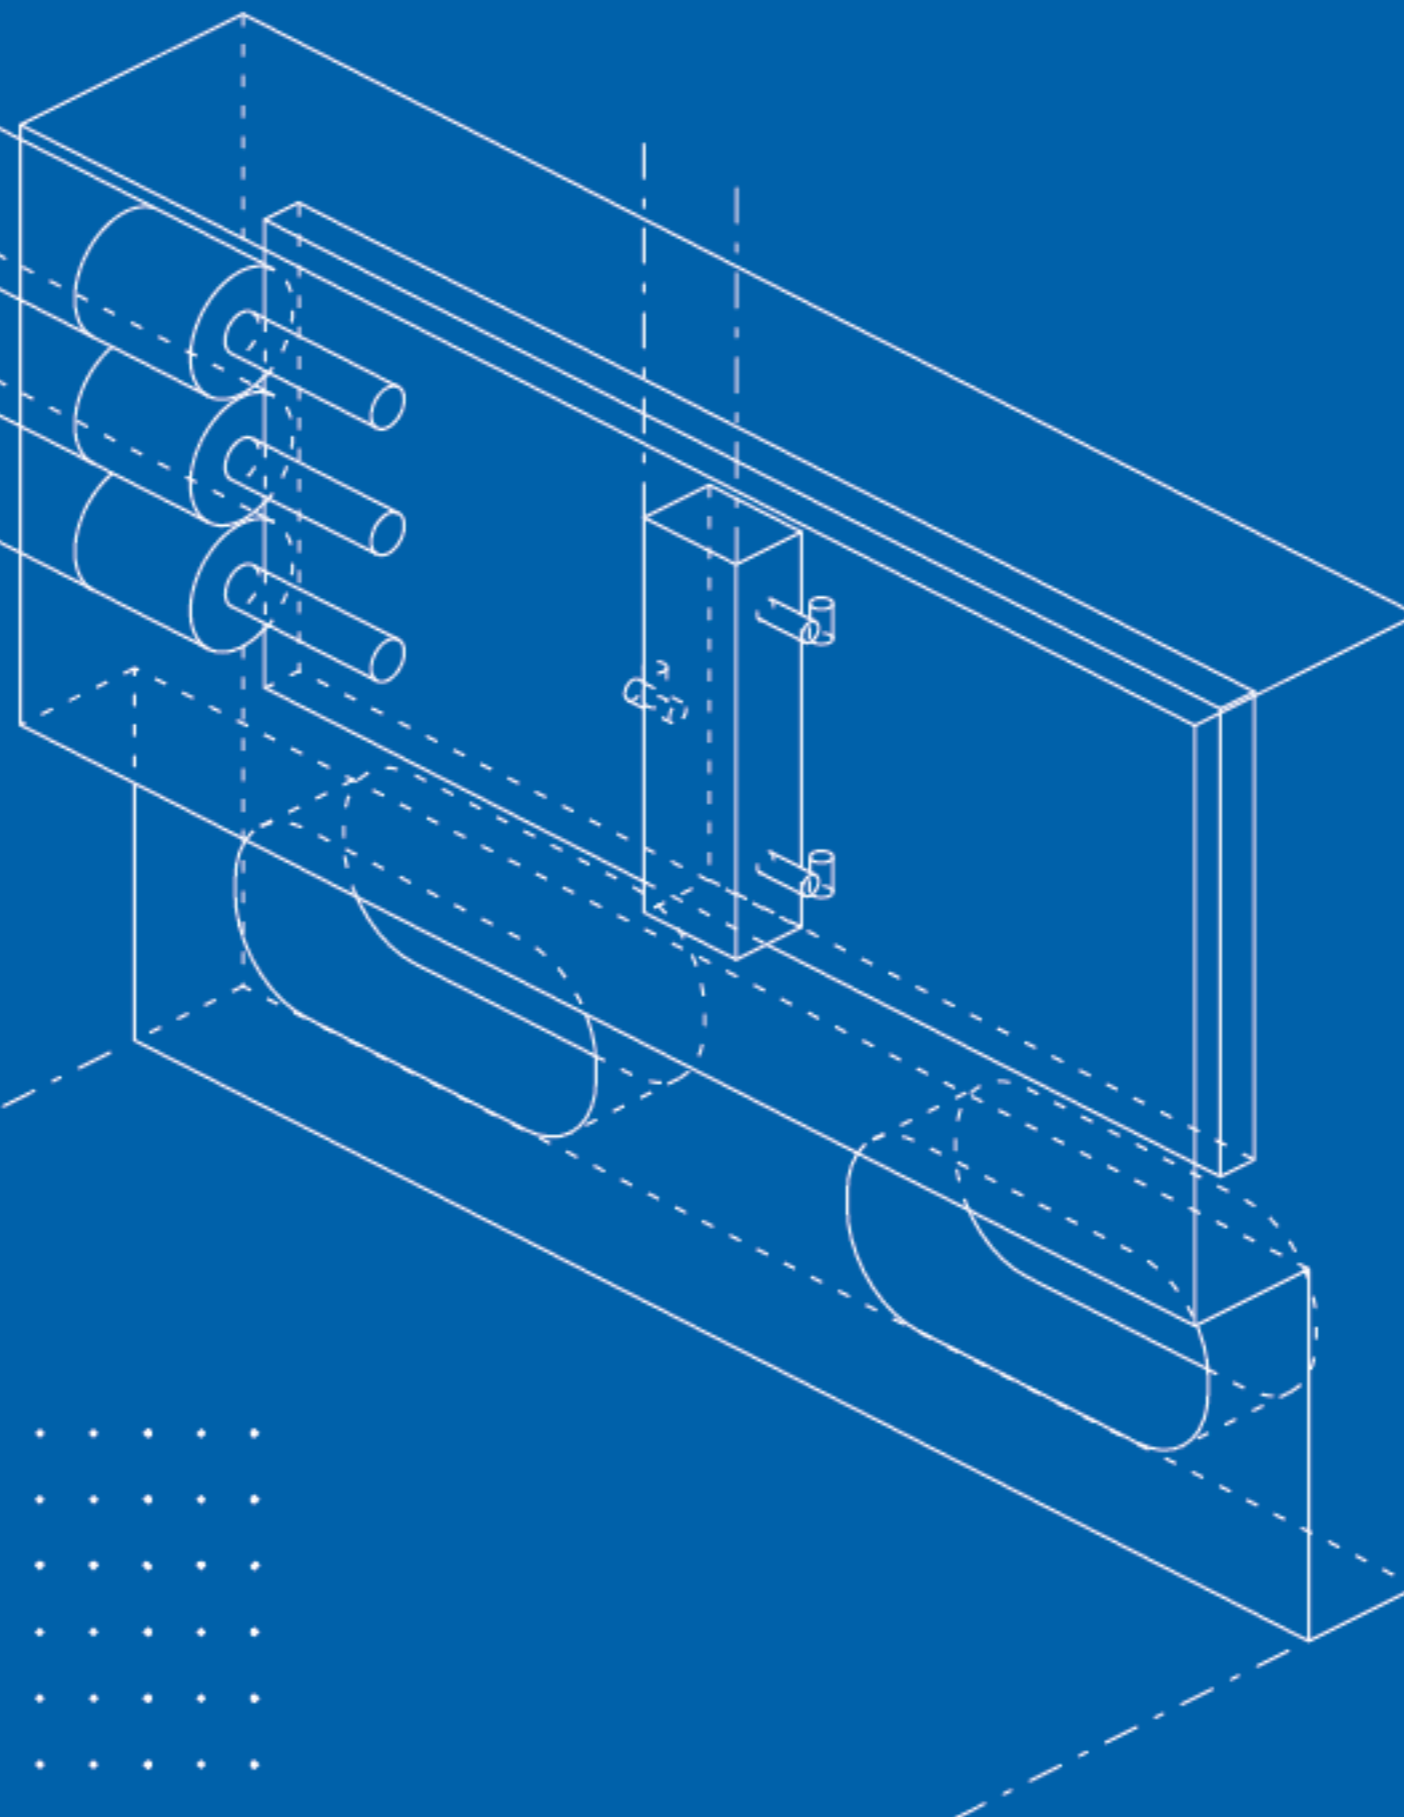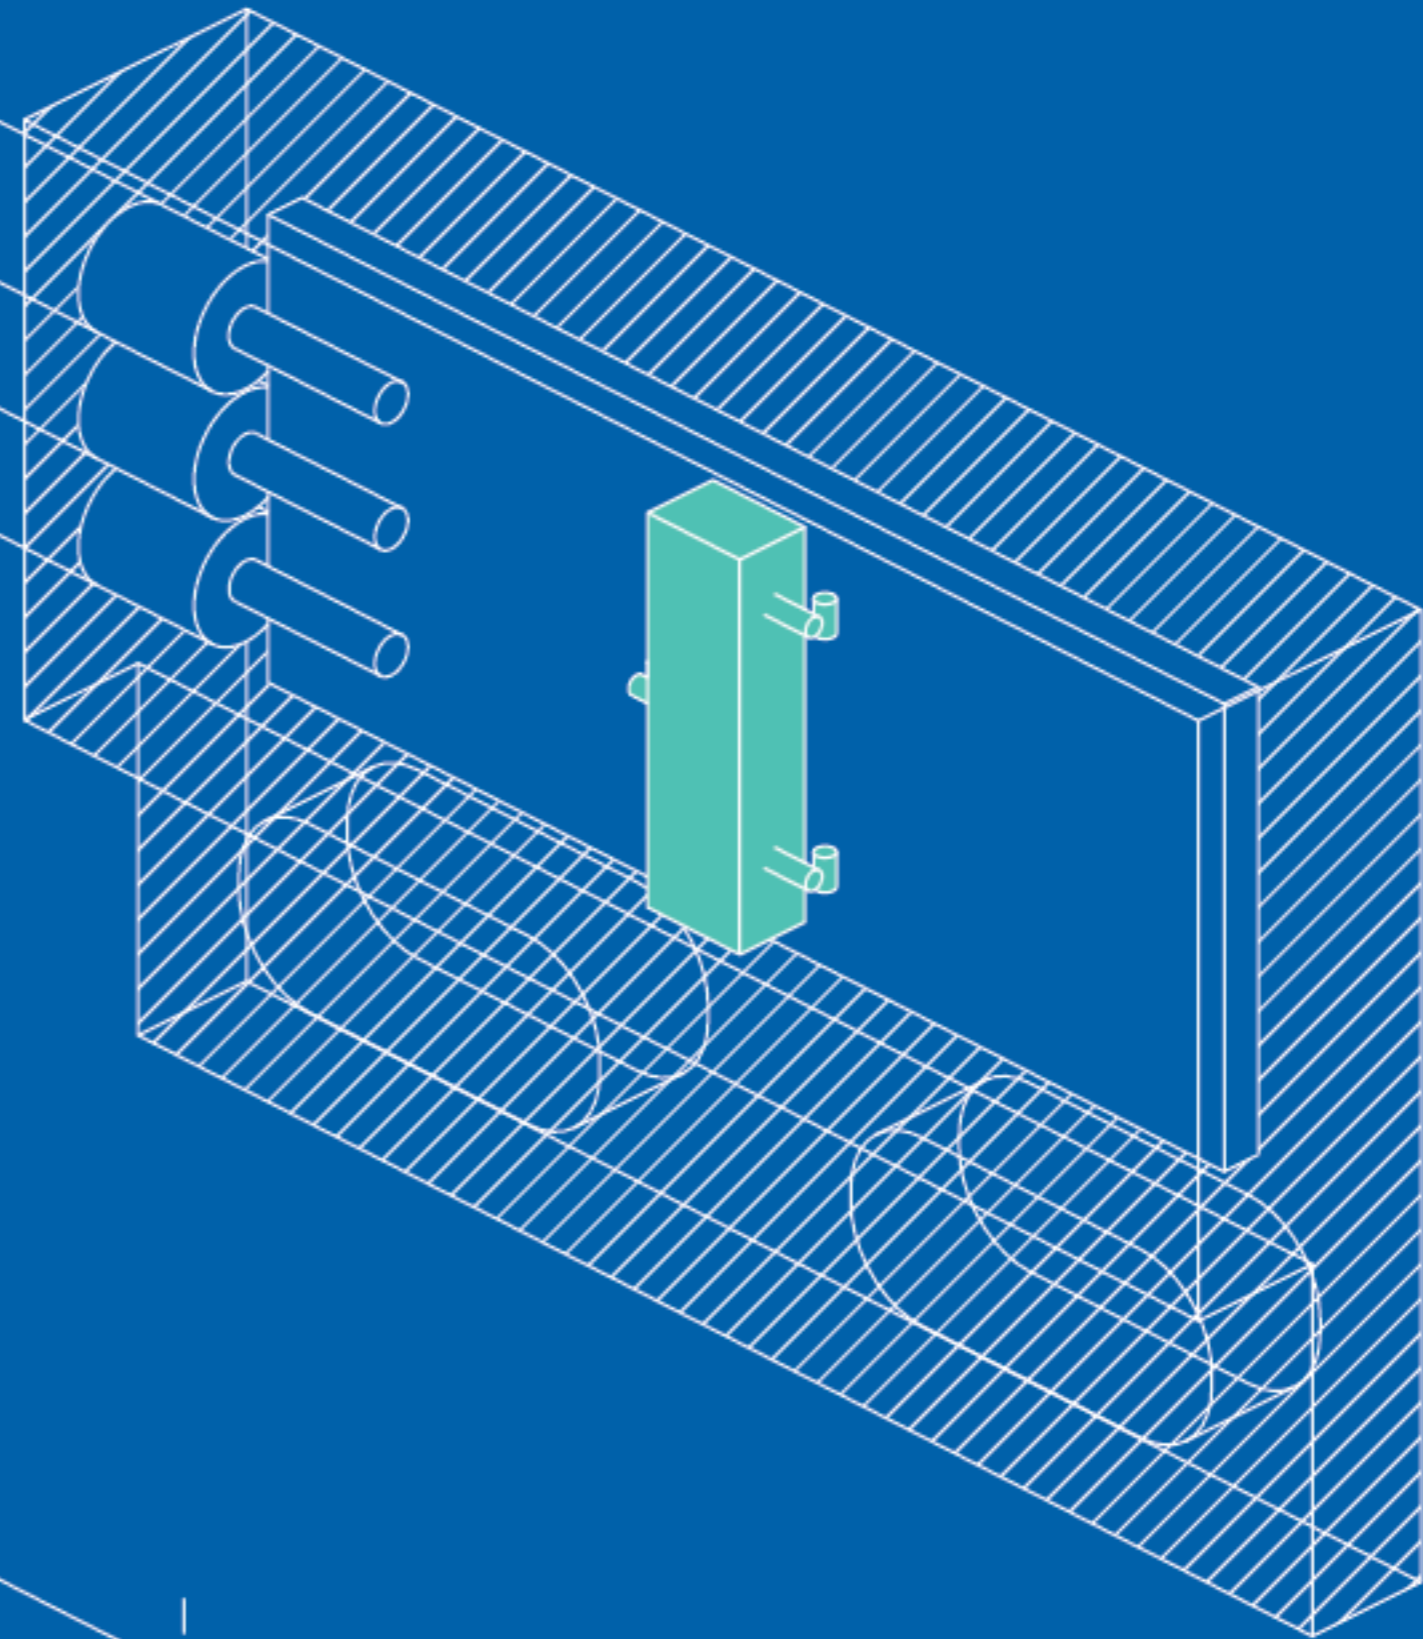

How does a Hall Sensor work?

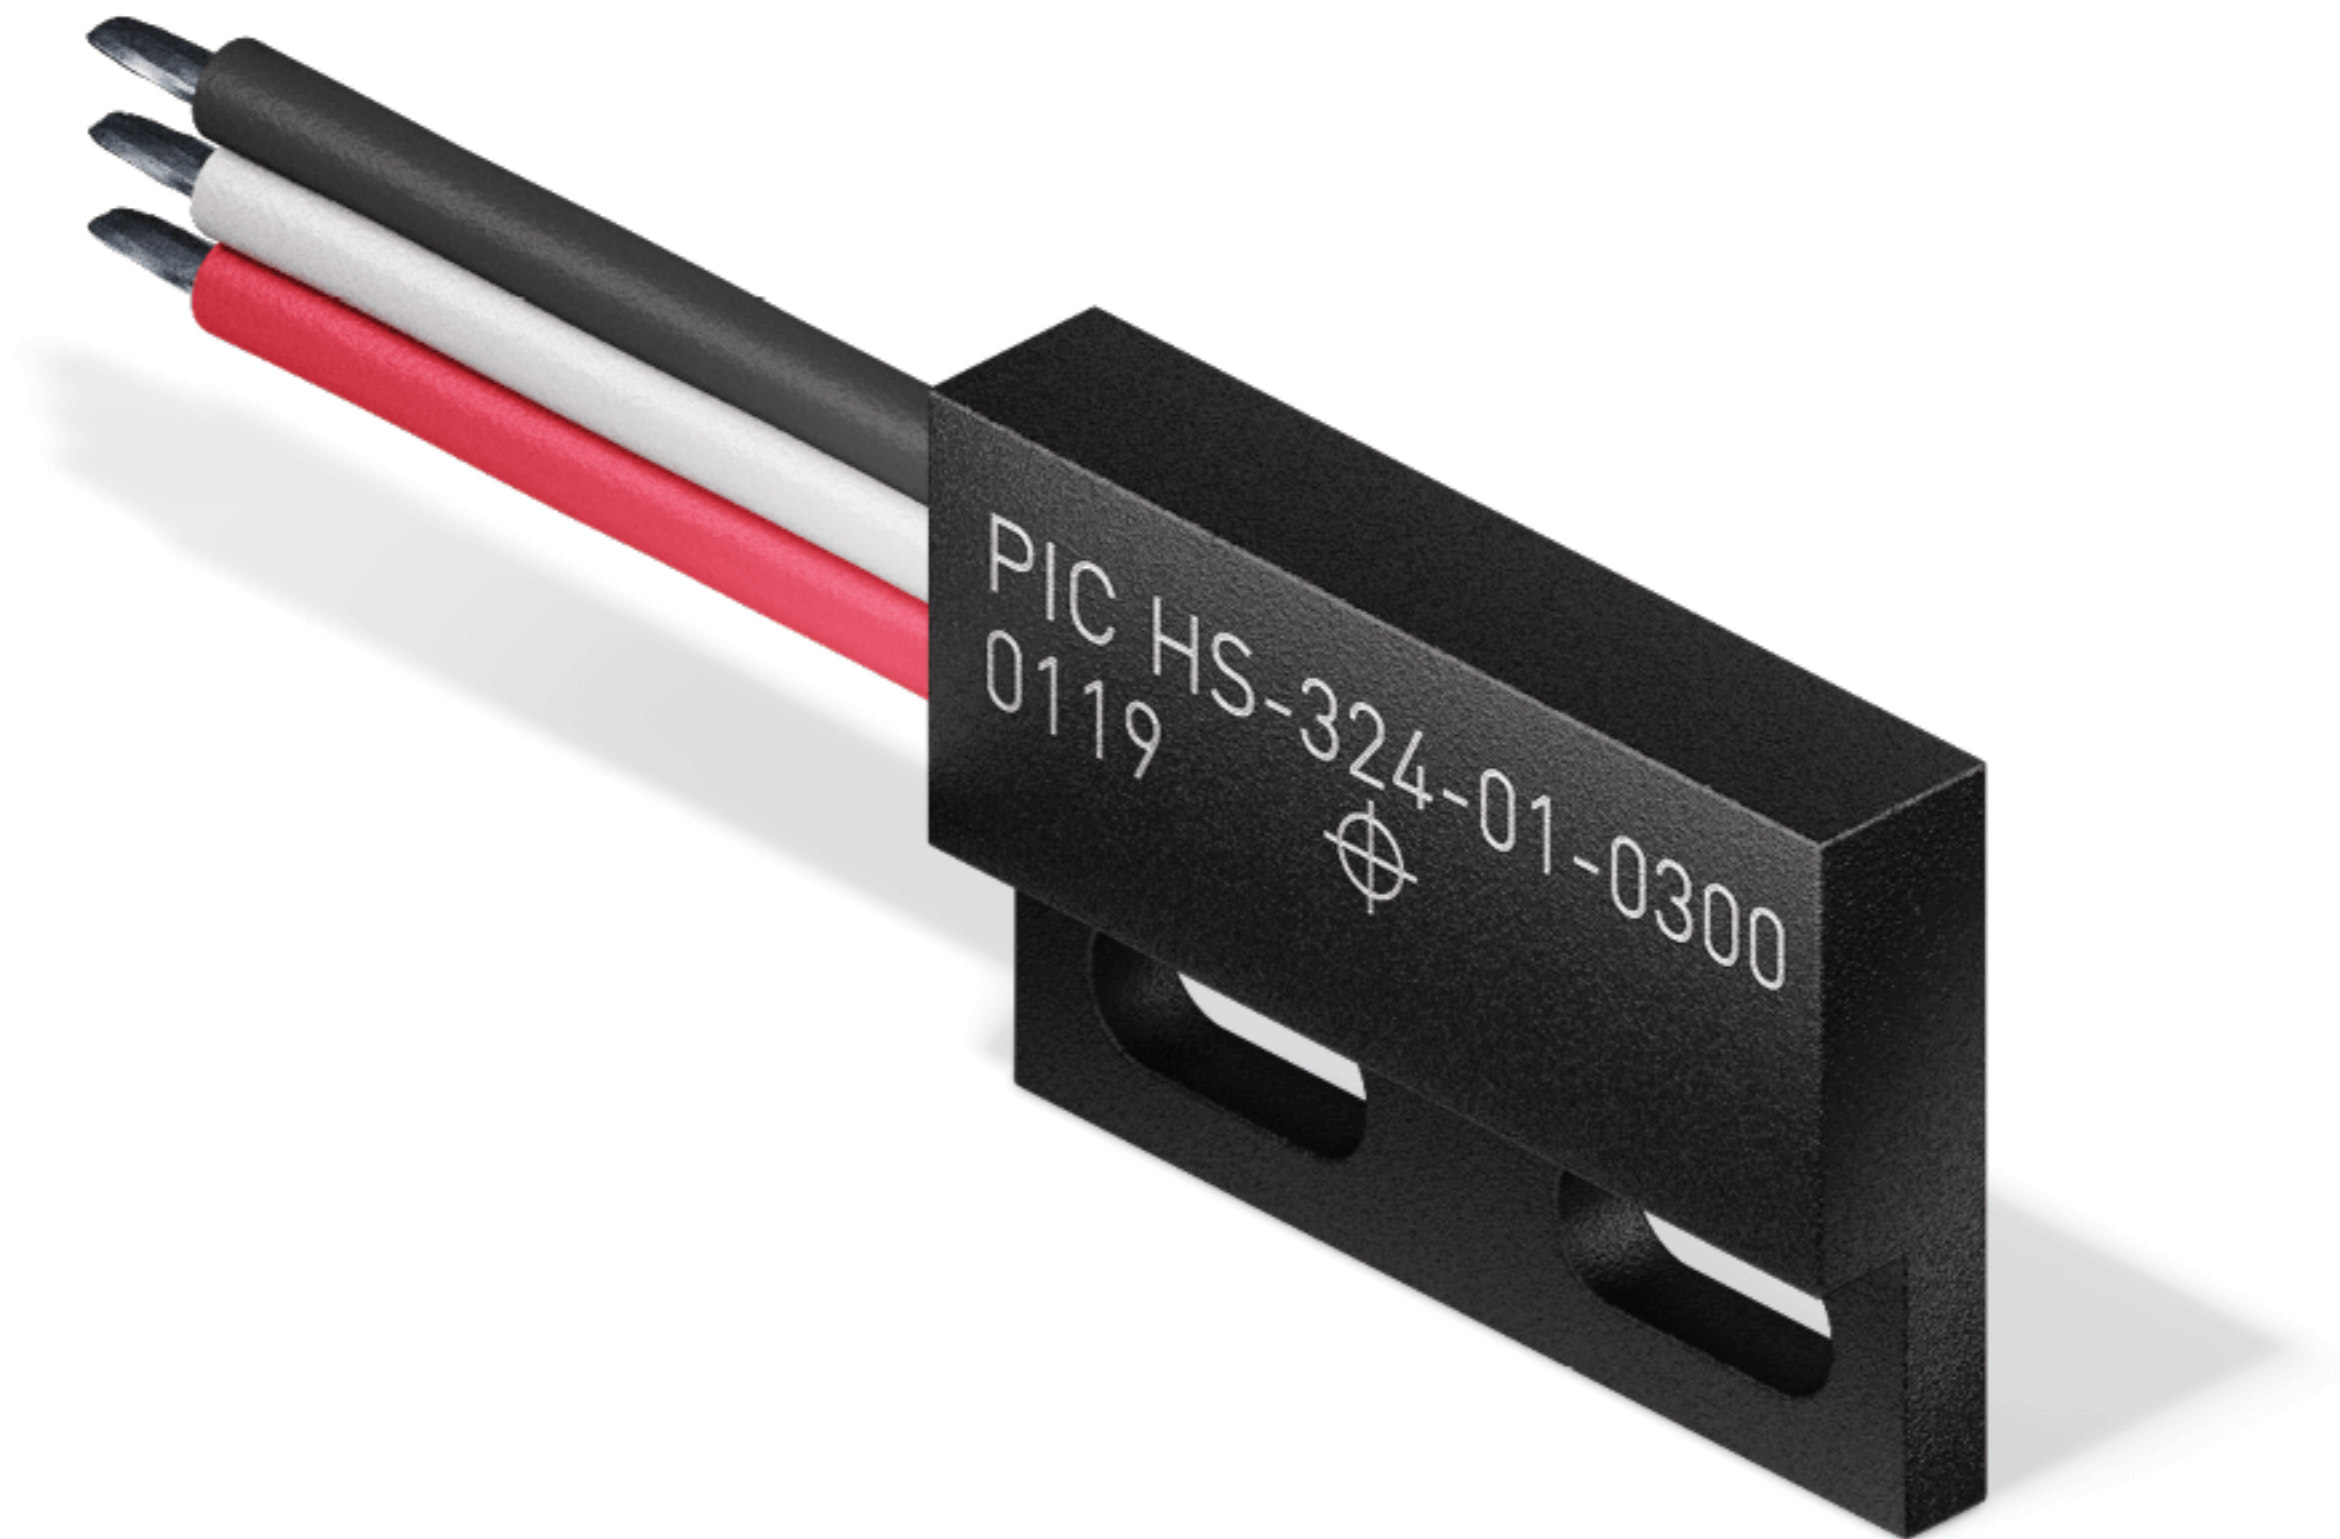

A Hall Sensors contains an IC which reacts to a magnetic field by changing its output status. This change can be interpreted as ON/OFF signal by a logic.

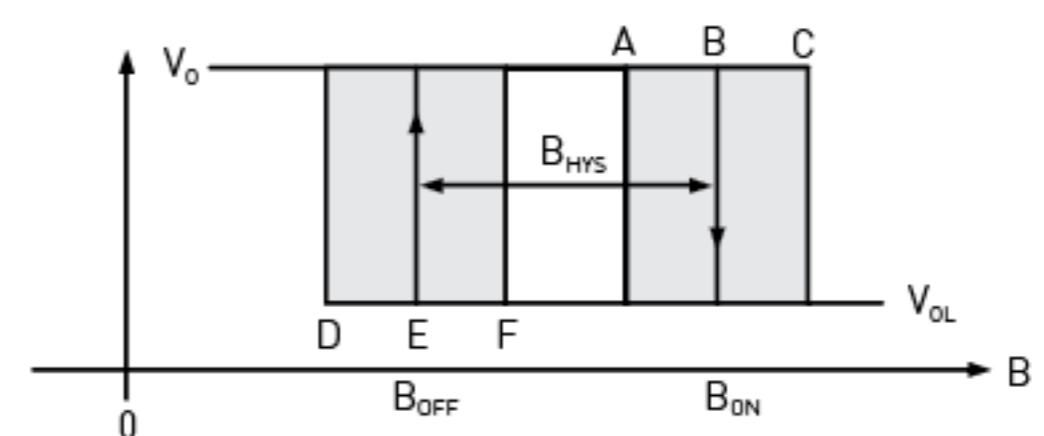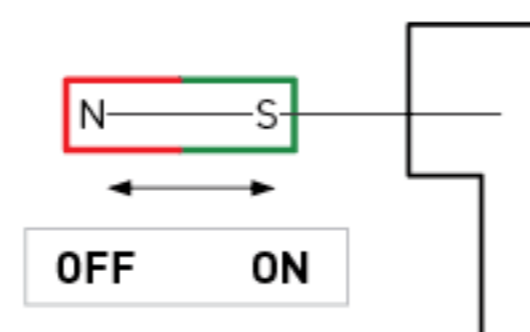

Benefits

- No mechanical movement, basically no wear
- Higher "switching frequency" compared to Reed Sensors
- Mechanically protected
- Easy assembly

Flatpack

Features


Compact housing

Ideal sensing point marked


Various chip positions inside the housing possible



HS-324

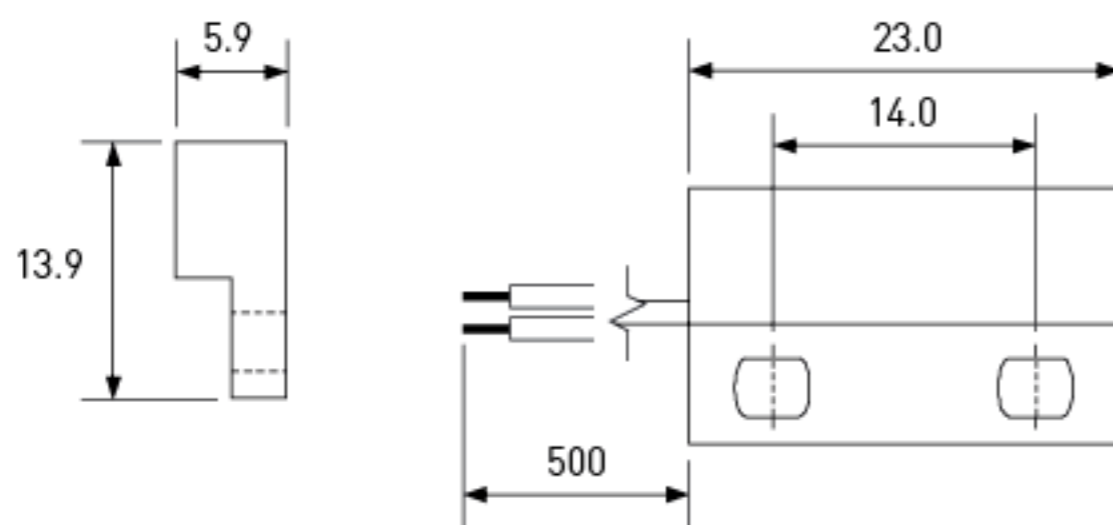

HS-324R

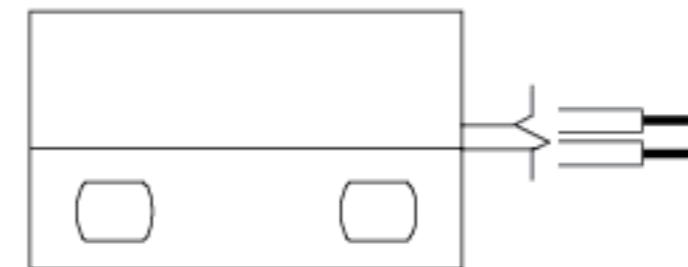

		HS-324-01 HS-324R-01	HS-324-02 HS-324R-02	HS-324-03 HS-324R-03	HS-324-04 HS-324R-04	HS-324-05 HS-324R-05
Type		Bipolar	Latching	Unipolar	Latching	Unipolar
Wires		3 wire	3 wire	3 wire	2 wire	2 wire
B_{ON}/B_{OFF}	mT	0.5/-0.5	2.5/-2.5	5.5/3.5	12.0/-12.0	6.0/4.0
Supply current I_S max	mA	2.4	2.4	2.4	5	2
Supply voltage min	V	2.7	2.7	2.7	3.0	3.0
Operating temperature	°C	-20 to +85				
Housing Material		ABS				
Cable type		AWG 24				

All dimensions in mm. Subject to change without prior notice.


Tubular Threaded

Features


Adjustable switching point

Rugged design


Ideal sensing point on front side

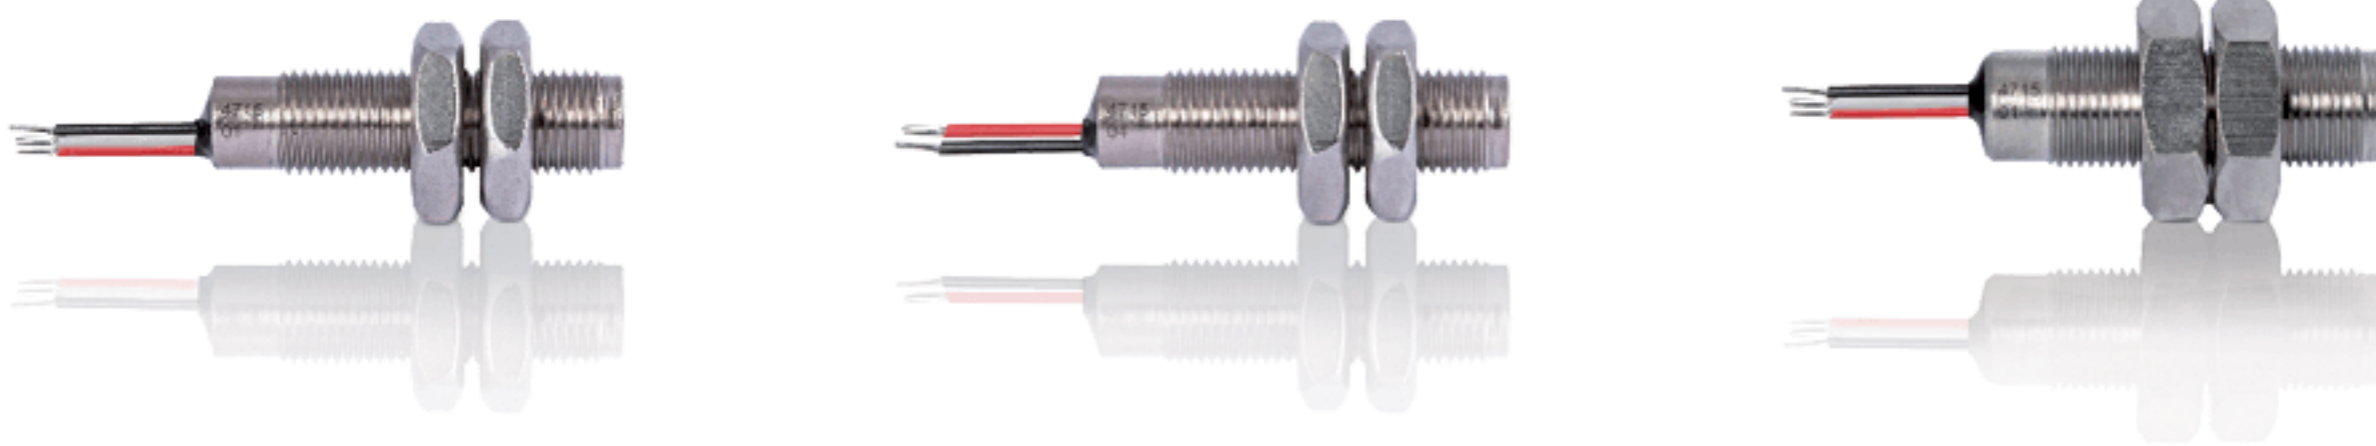

HS-2210M

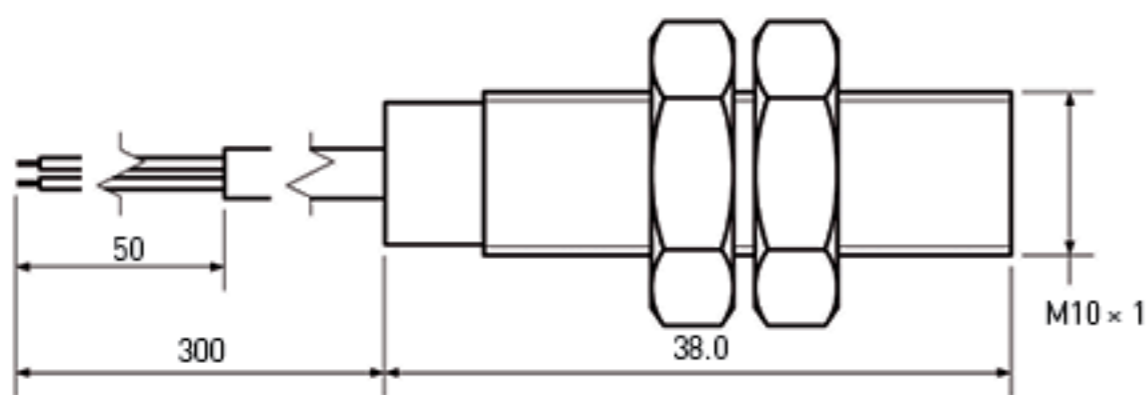

HS-2212M

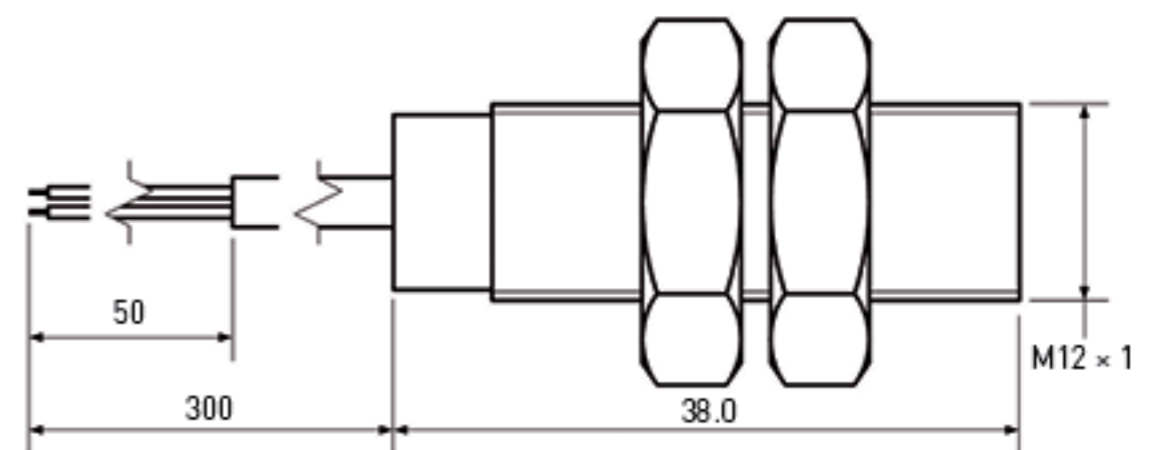

		HS-2210M-01 HS-2212M-01	HS-2210M-02 HS-2212M-02	HS-2210M-03 HS-2212M-03	HS-2210M-04 HS-2212M-04	HS-2210M-05 HS-2212M-05
Type		Bipolar	Latching	Unipolar	Latching	Unipolar
Wires		3 wire	3 wire	3 wire	2 wire	2 wire
B _{ON} /B _{OFF}	mT	0.5/-0.5	2.5/-2.5	5.5/3.5	12.0/-12.0	6.0/4.0
Supply current I _S max	mA	2.4	2.4	2.4	5	2
Supply voltage min	V	2.7	2.7	2.7	3.0	3.0
Operating temperature	°C	-20 to +85				
Housing Material		Nickel plated brass				
Cable type		AWG 24				

All dimensions in mm. Subject to change without prior notice.


Flange Mount

Features


Ultra compact housing

Various sensitivities


Customized types available

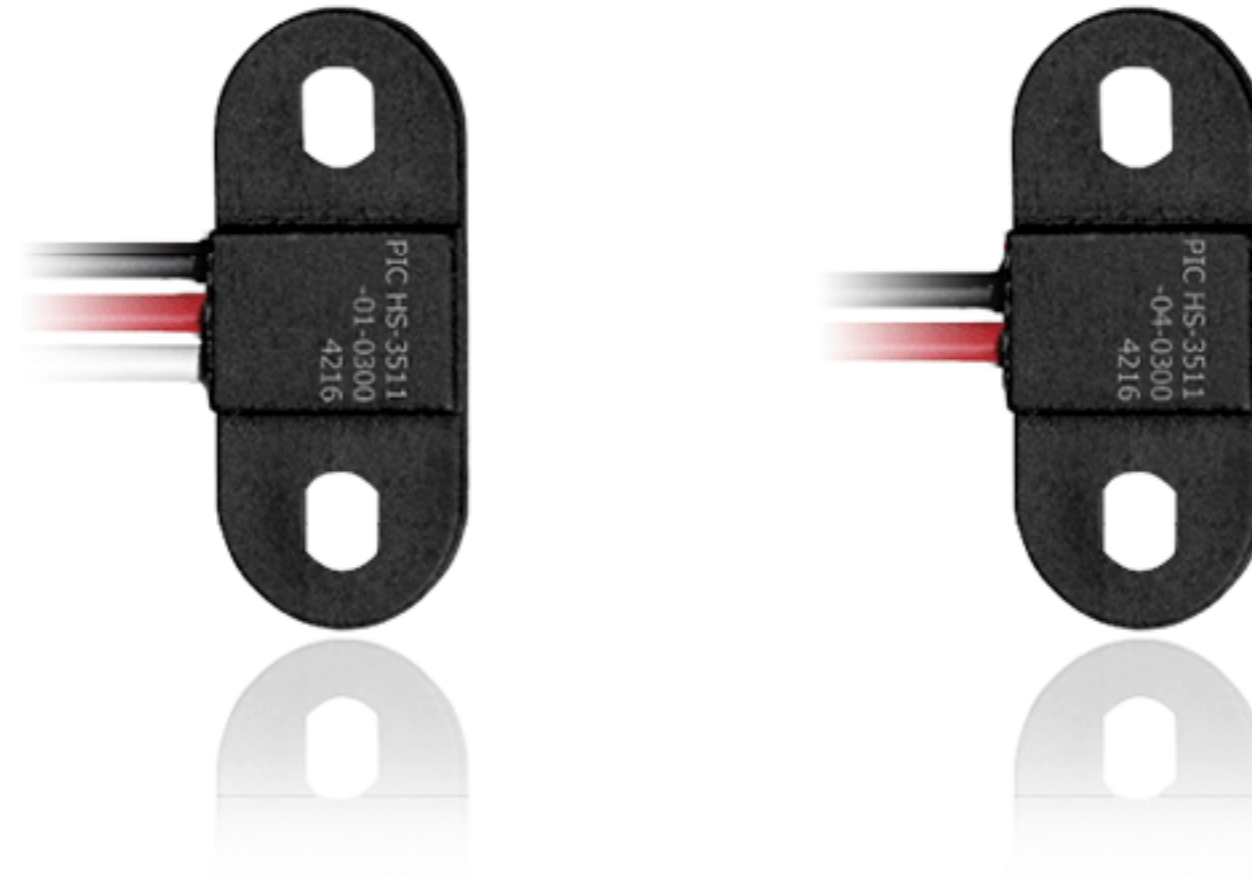

HS-3511
3 wire

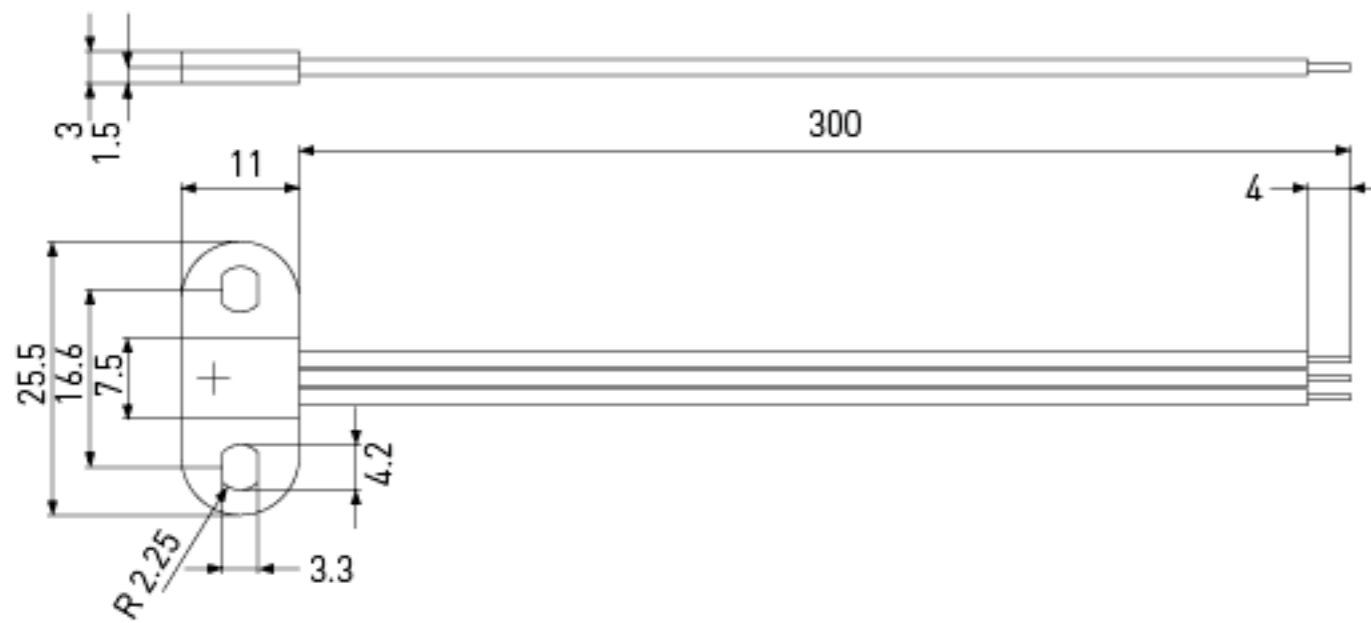

HS-3511
2 wire


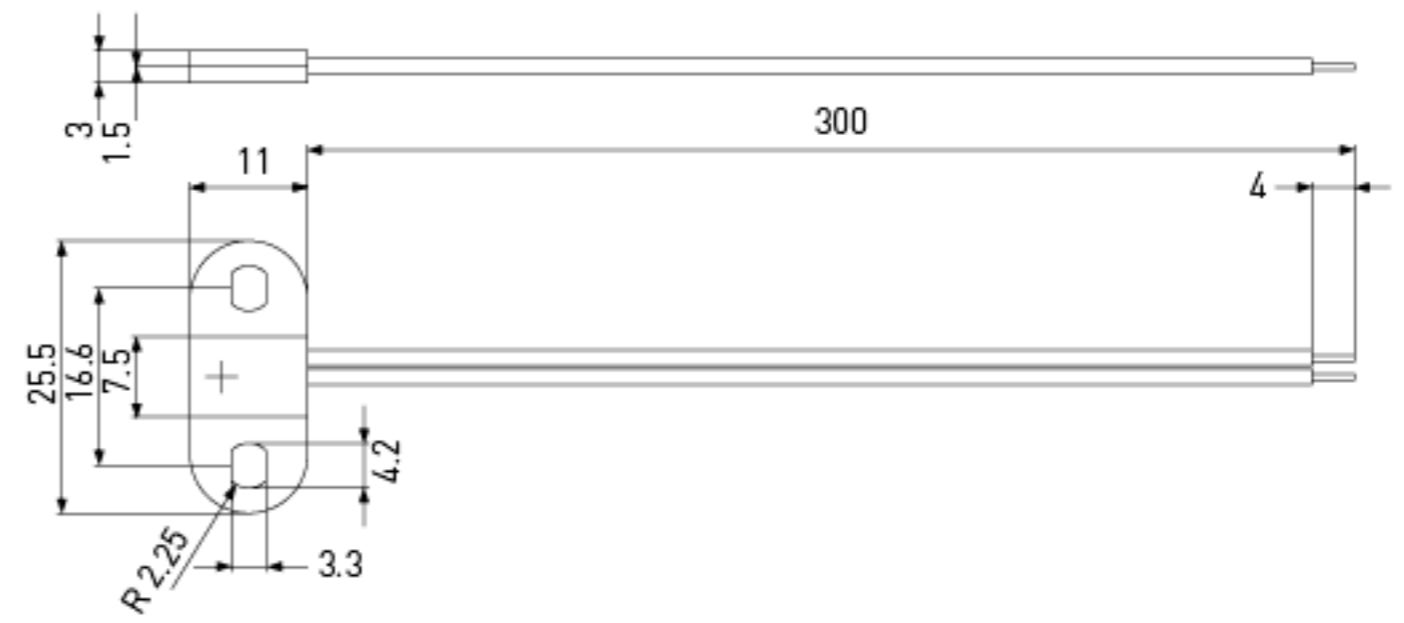


		HS-3511-01	HS-3511-02	HS-3511-03	HS-3511-04	HS-3511-05
Type		Bipolar	Latching	Unipolar	Latching	Unipolar
Wires		3 wire	3 wire	3 wire	2 wire	2 wire
B _{ON} /B _{OFF}	mT	0.5/-0.5	2.5/-2.5	5.5/3.5	12.0/-12.0	6.0/4.0
Supply current I _S max	mA	2.4	2.4	2.4	5	2
Supply voltage min	V	2.7	2.7	2.7	3.0	3.0
Operating temperature	°C	-20 to +85				
Housing Material		PA6				
Cable type		AWG 24				


All dimensions in mm. Subject to change without prior notice.

Magnets

[Material with magnetic properties; used for Reed Switch and Hall-Sensor actuation; magnetic material is matched to specific usage scenarios; can also be provided in housings.]

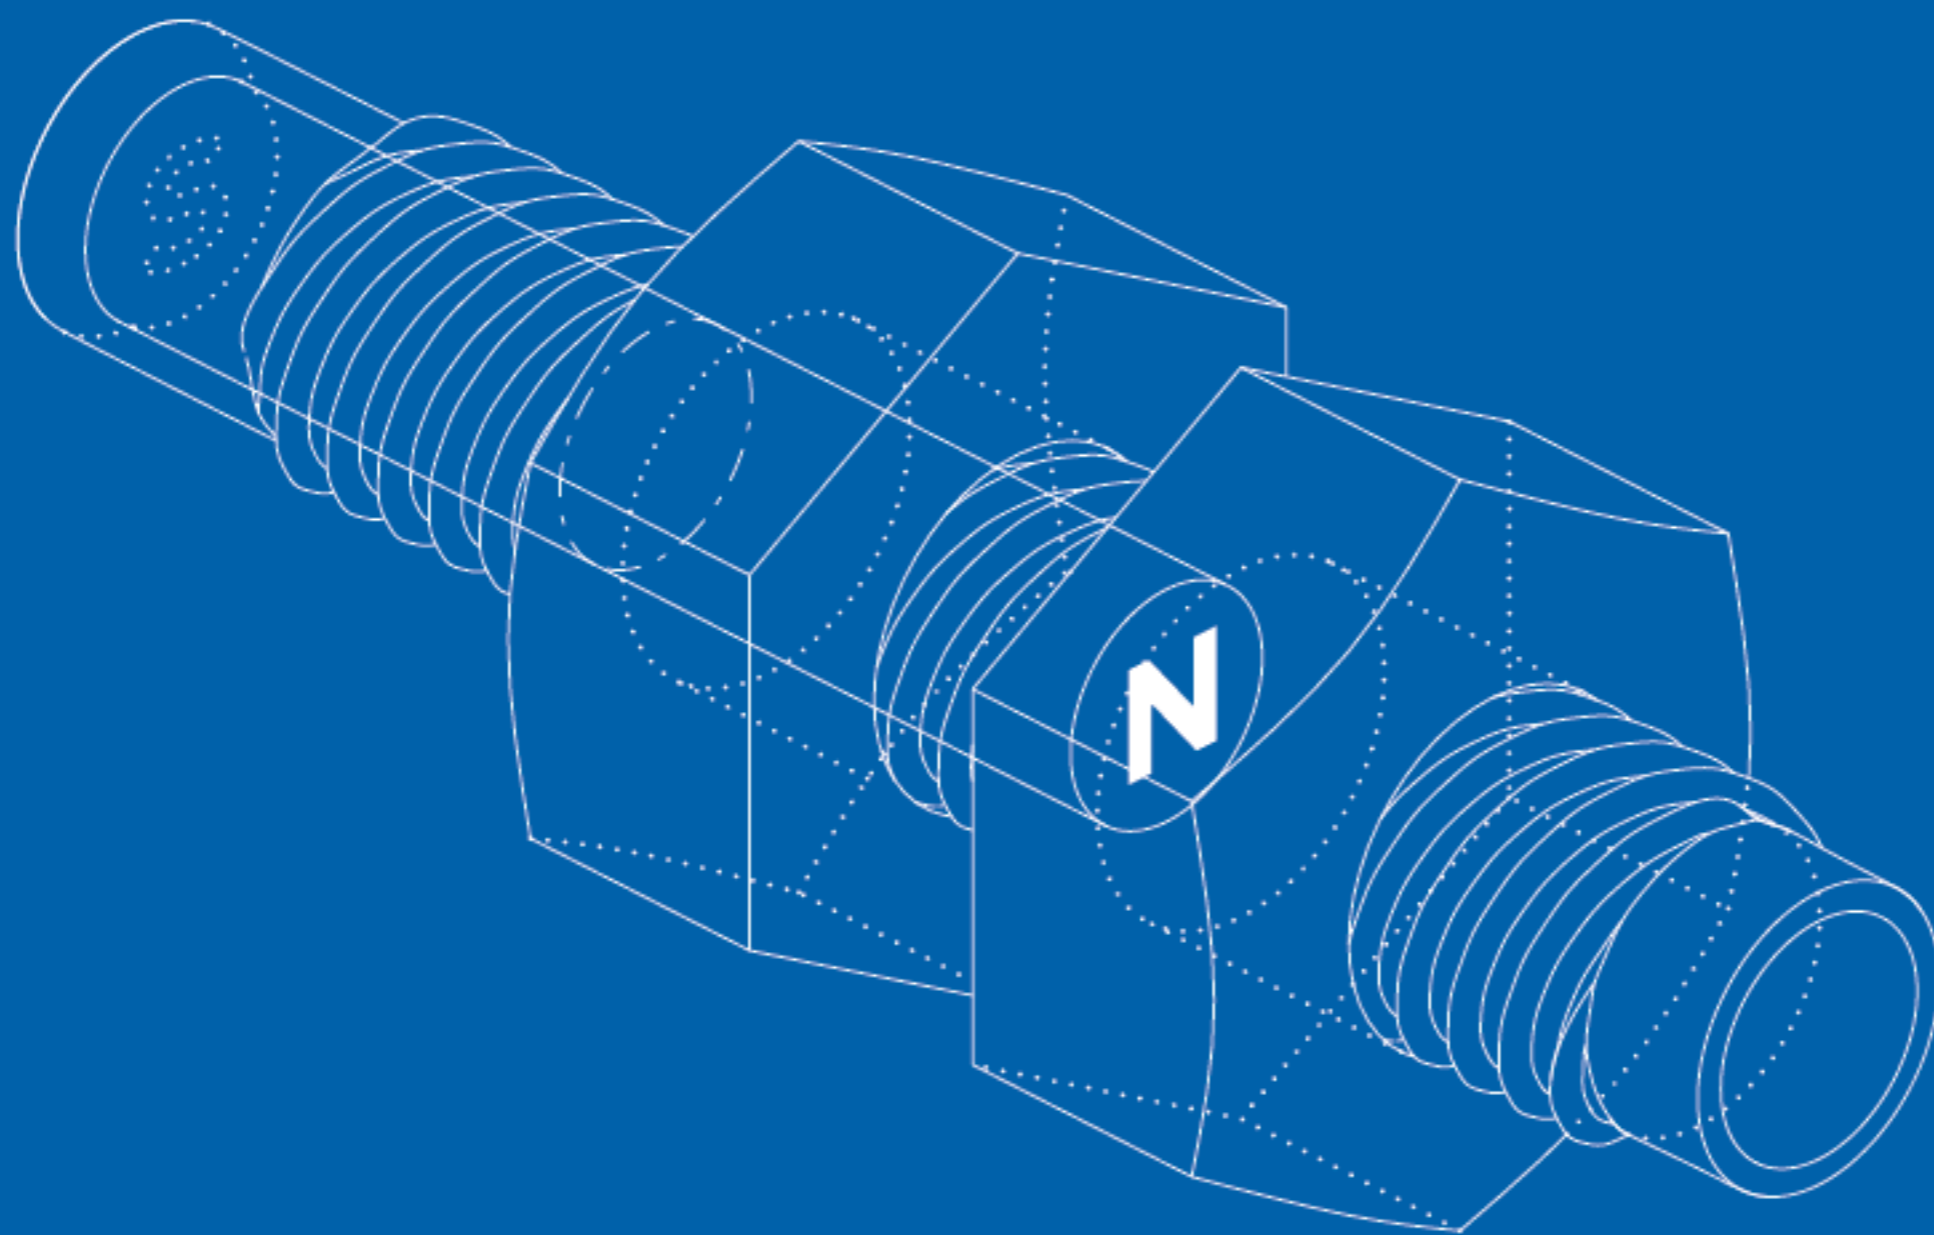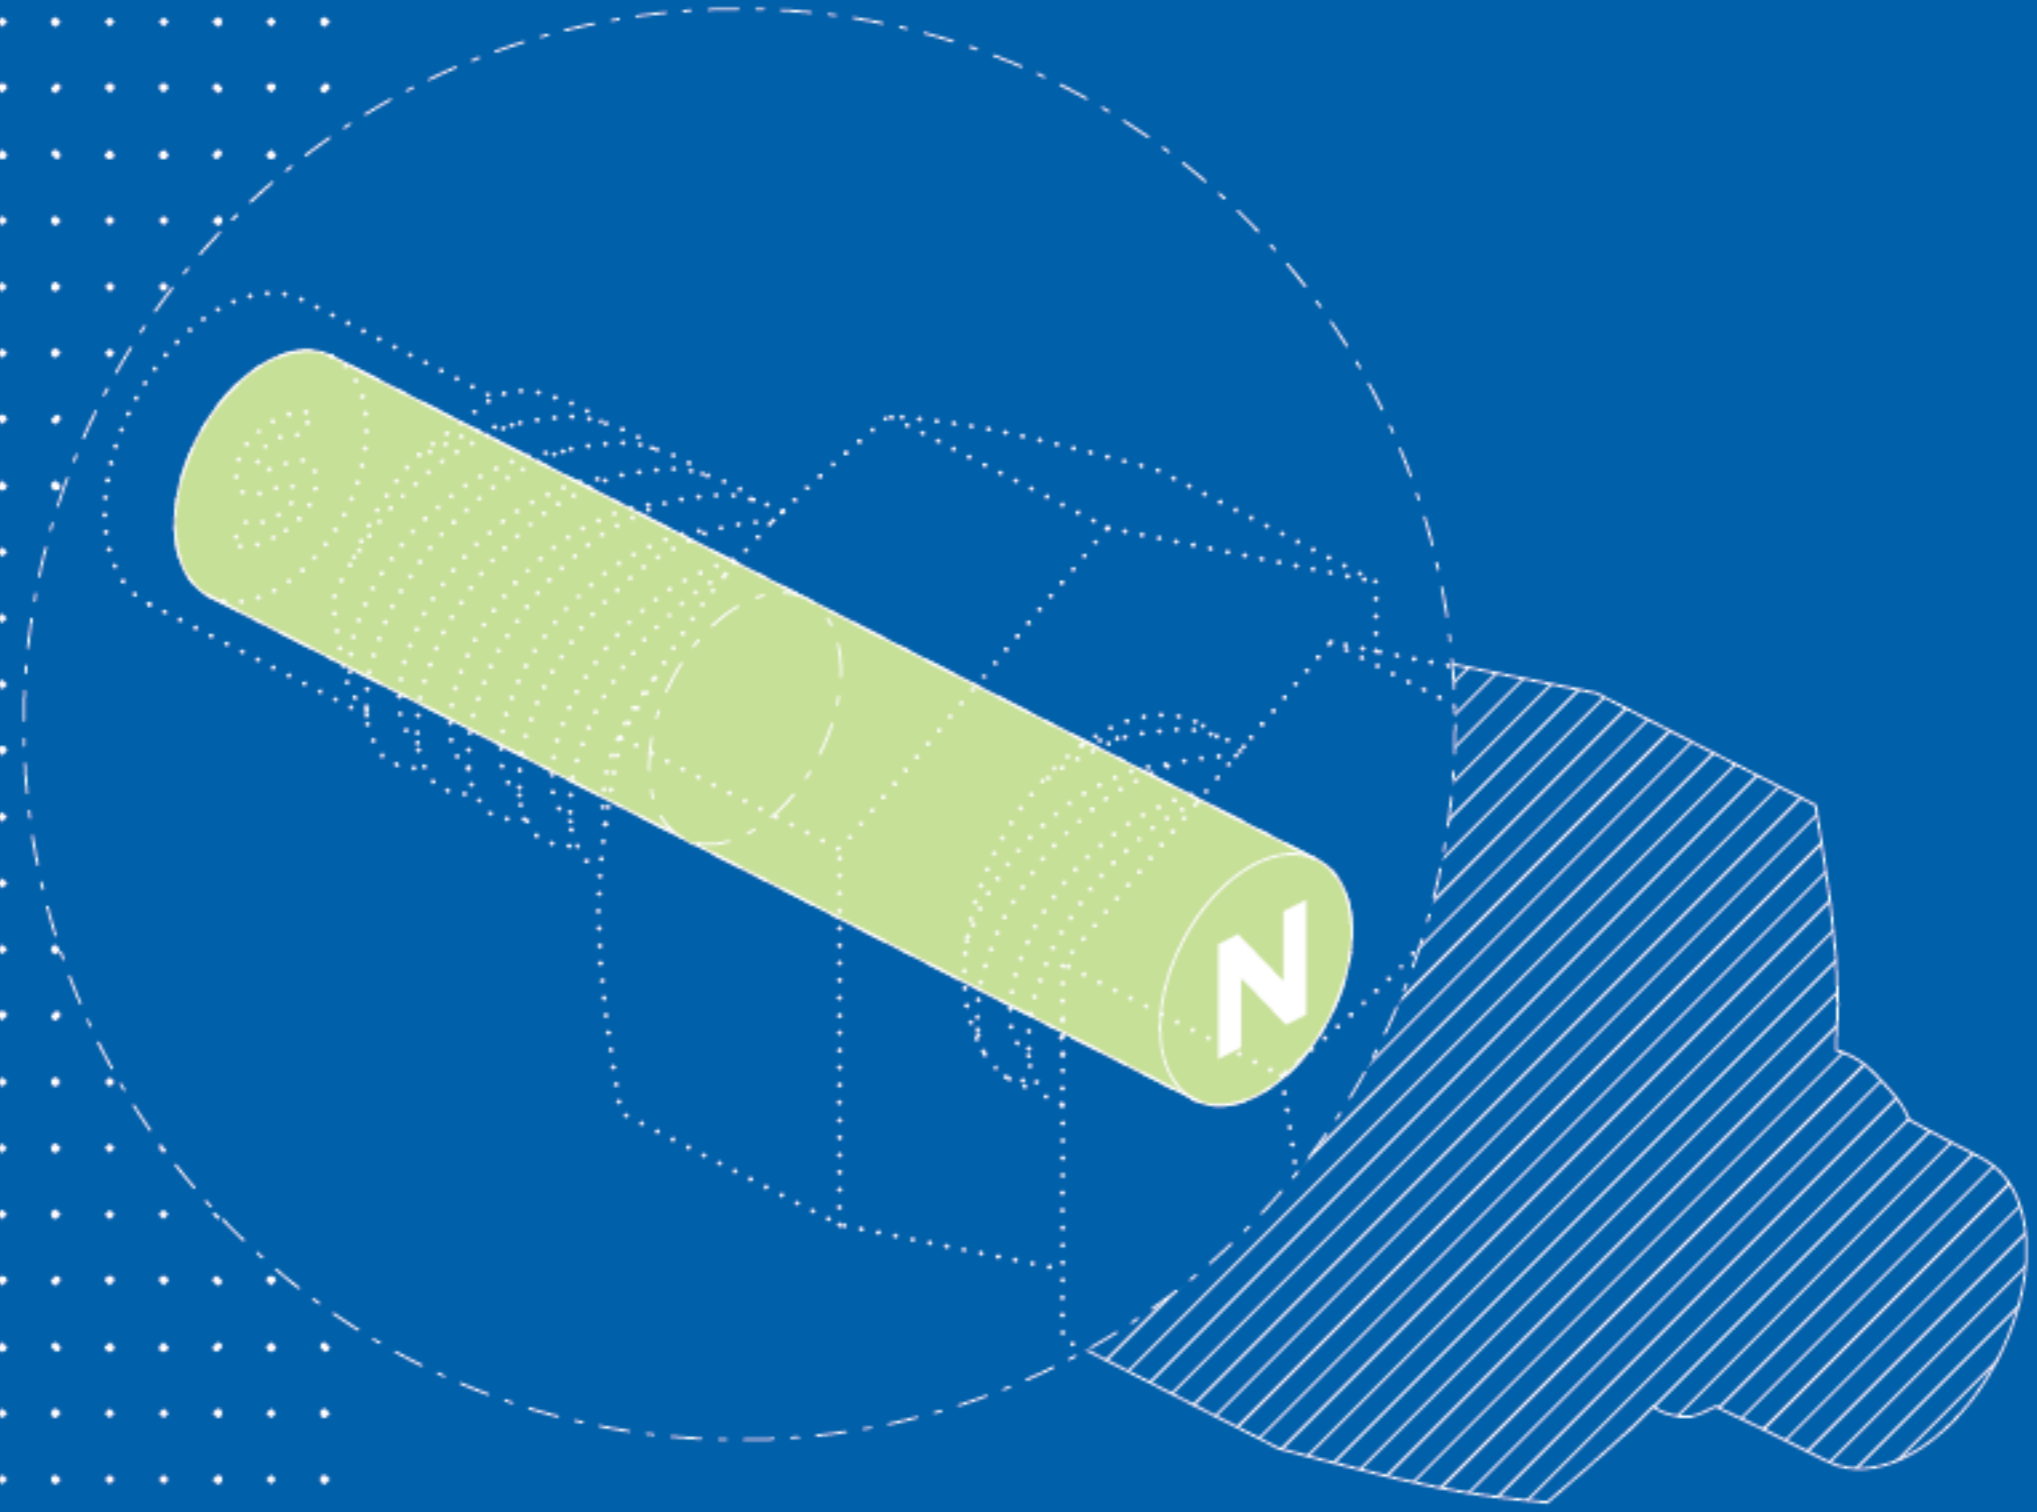

How does a Magnet work?

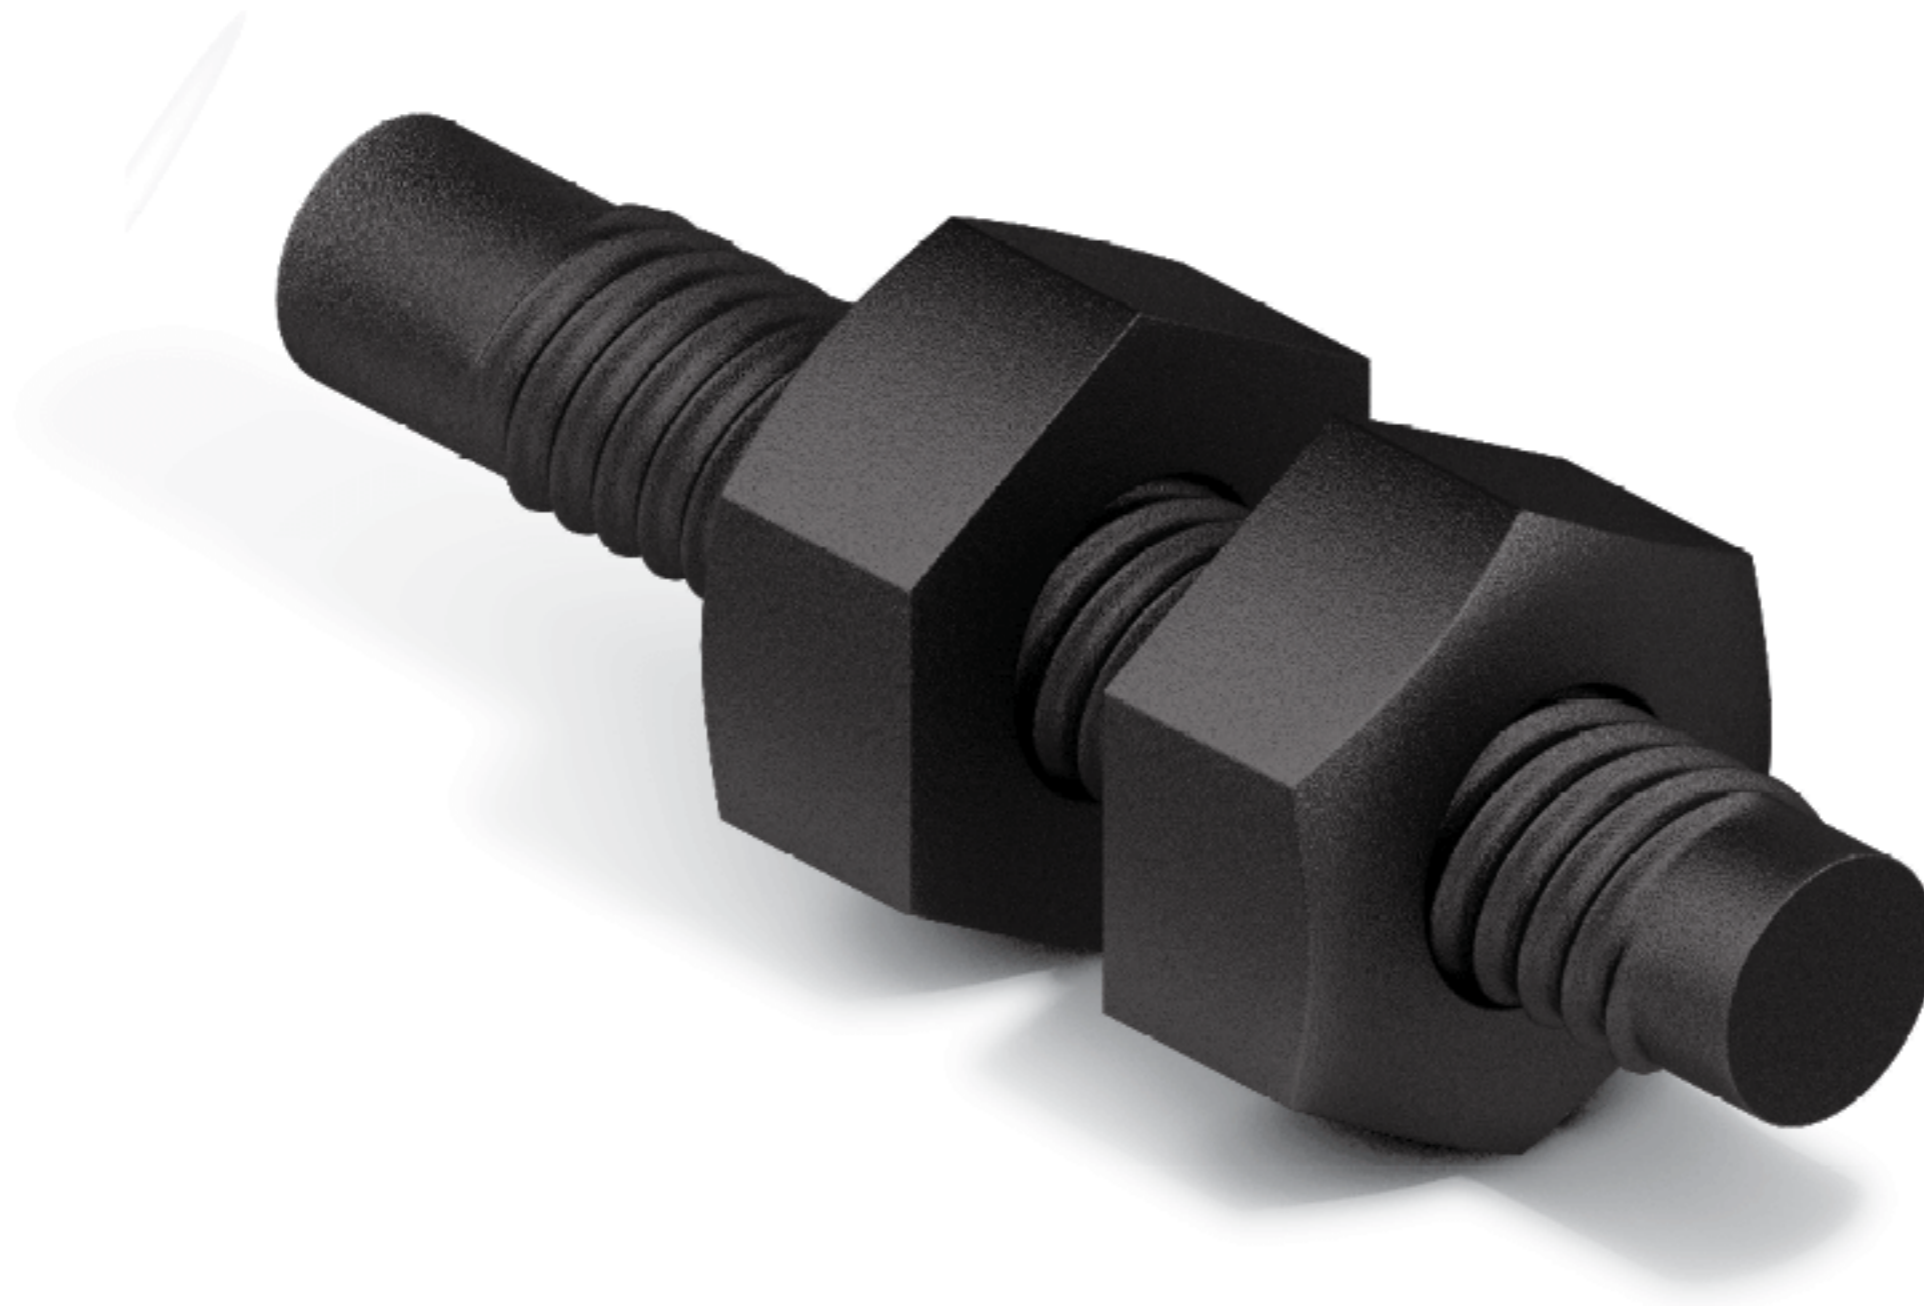

A Magnet creates a magnetic field that pulls on other magnetic materials like iron. After their magnetization permanent magnets keep their magnetic characteristics for a very long time.

Most Reed Sensor applications are operated by permanent magnets. The most common materials used in these applications are Ferrite, NdFeB (Neodymium-Iron-Boron), SmCo (Samarium-Cobalt) and AlNiCo (Aluminium-Nickel-Cobalt). We will specify the matching material, strength and form, according to the operating environment.

Benefits

- Matching magnet for your application
- Magnets with or without housing available
- Switching component and complementary Magnet
- Simple procurement, Plug&Play sensor solutions

Check table below for most convenient magnet material.

Selection Guide

LOW

HIGH

Costs	Ferrite	AlNiCo	NdFeB	SmCo
Energy Product	Ferrite	AlNiCo	SmCo	NdFeB
Operating Temperature	NdFeB	Ferrite	SmCo	AlNiCo
Corrosion Resistance	NdFeB	SmCo	AlNiCo	Ferrite
Resistance to Demagnetization	AlNiCo	Ferrite	NdFeB	SmCo
Mechanical Strength	Ferrite	SmCo	NdFeB	AlNiCo
Temperature Coefficient	AlNiCo	SmCo	NdFeB	Ferrite

Maximum power, minimum space

In recent years, Neodymium-Iron-Boron magnets (NdFeB) have advanced from being exotic luxury items to affordable power magnets.



The benefits in sensor applications

Increased switching distance

Miniature design possible

Resistance to demagnetization

Greater product design flexibility

Material Grades		Remanence Br	Coercivity		Energy Product (BH) max.	Operating Temperature max.
			HcB	HcJ		
		mT	kA/m	kA/m	kJ/m ³	°C
NdFeB	N30	1105	836	955	235	80
	N30H	1105	836	1274	235	120
	N30SH	1100	836	1512	239	150
	N33EH	1185	828	955	275	180
	N35	1185	828	955	275	80
	N35H	1190	828	1274	275	120
	N35SH	1190	828	1512	275	150
	N40SH	1260	844	1512	314	150
	N45	1350	840	955	354	80
	N48H	1395	955	1353	378	120
SmCo5	S20	875	617	1194	159	250
Sm2Co17	S24H	975	724	1433	183	300
	S28H	1065	724	1433	215	300
AlNiCo	A500	1281	50	52	40	500
Ferrite	Y10	215	143	203	8	250
	Y30BH	390	229	231	29	300
	Y35	410	183	167	31	300
Bonded Ferrite	FB1	240	171	225	11	80
Bonded NdFeB	BN8	575	378	1035	64	150


Typical values, may vary!

Features


- Easily mountable
- Matches chosen Sensor
- Mechanically protected
- Customized types available




MSM-2431

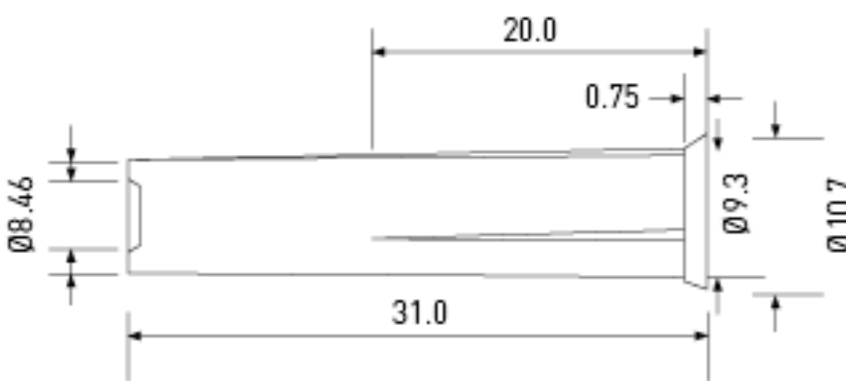


MSM-313

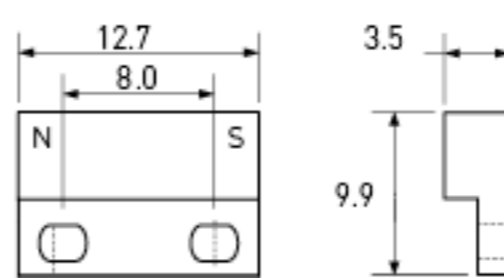


MSM-320

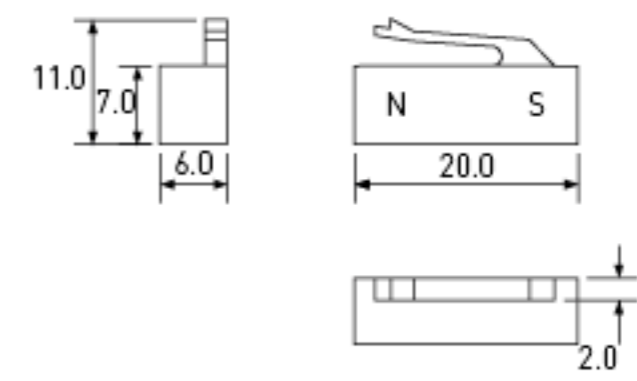


MSM-324

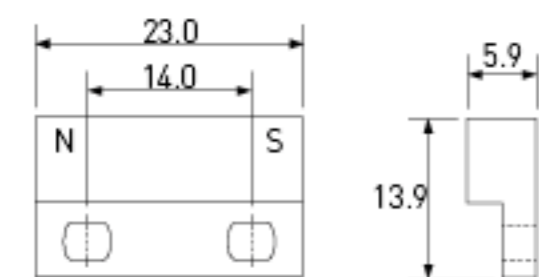

MSM-328

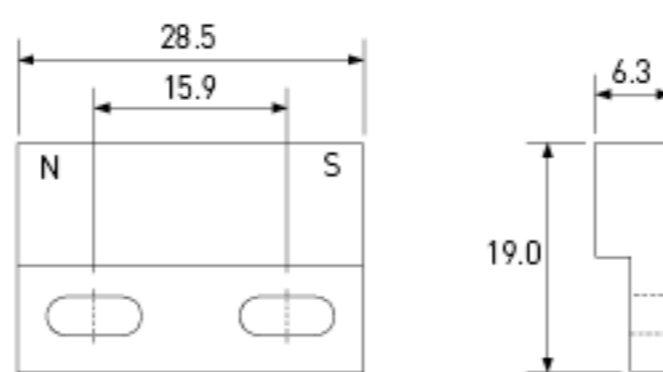


MSM-332

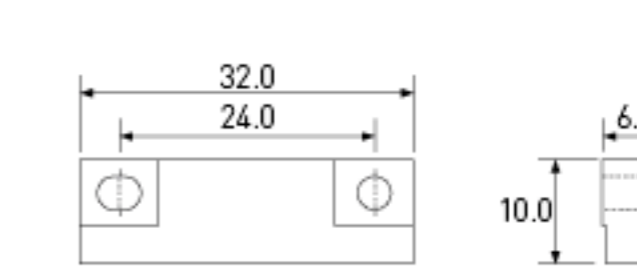


		MSM-2431	MSM-313	MSM-320	MSM-324	MSM-328	MSM-332
Remanence Br	mT	1190	1395	1190	1105	1105	1105
Coercivity HcB	kA/m	870	955	-	836	836	836
Coercivity HcJ	kA/m	1350	1353	1512	1274	1274	1274
Energy Product (BH) max.	kJ/m³	275	378	275	235	235	235
Magnetic moment M	x 10 ⁻⁵ Vs cm	10.0	0.3	2.4	3.42	3.42	4.1
Operating Temperature max.	°C	85	85	85	85	85	85
UL/CSA/RoHS		--/--/•	--/--/•	--/--/•	--/--/•	--/--/•	--/--/•
Housing material		PA-GF	ABS	PA-GF	ABS	PA-GF	ABS


All dimensions in mm. Subject to change without prior notice.

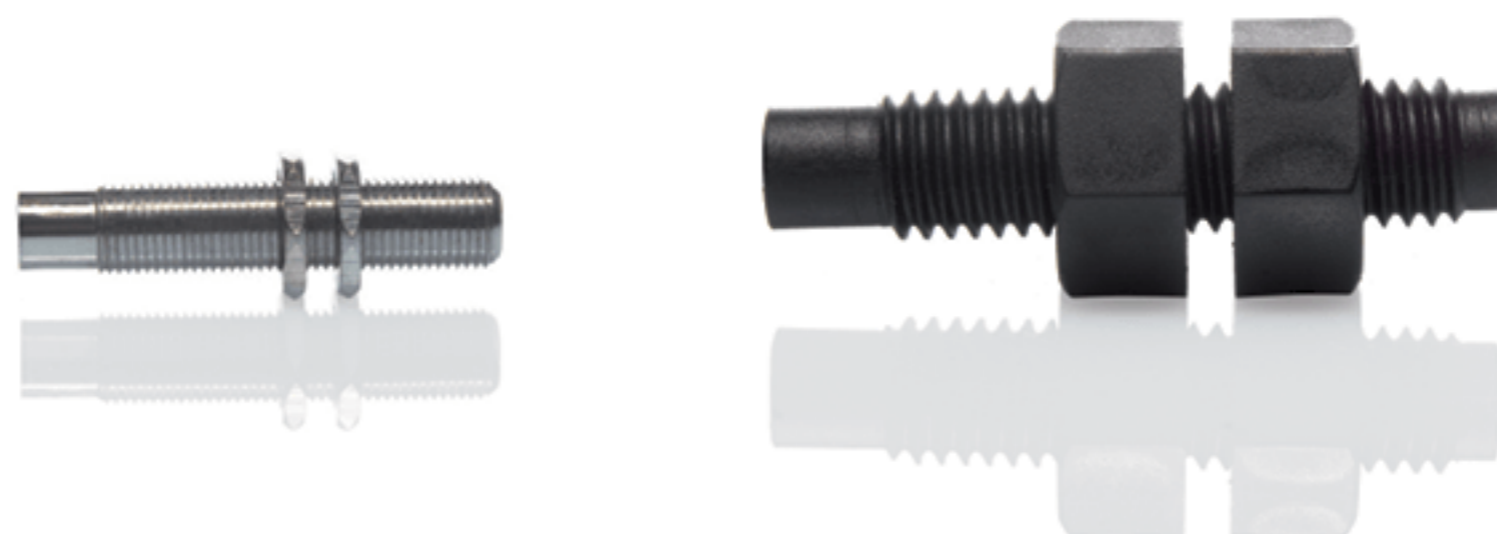


MSM-225

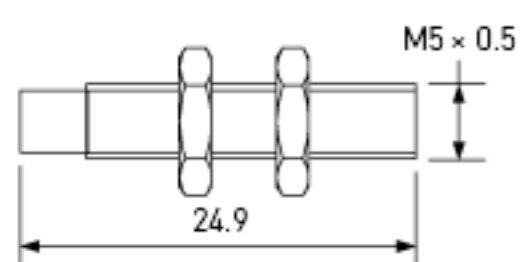


MSM-226M

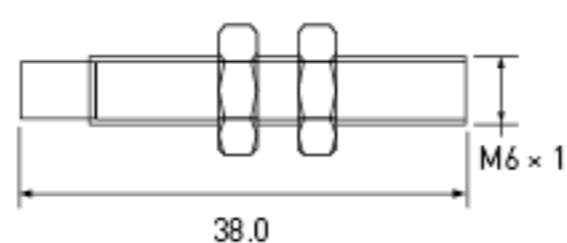


MSM-228

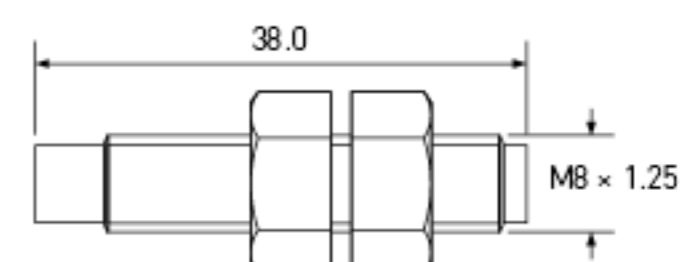


MSM-228M

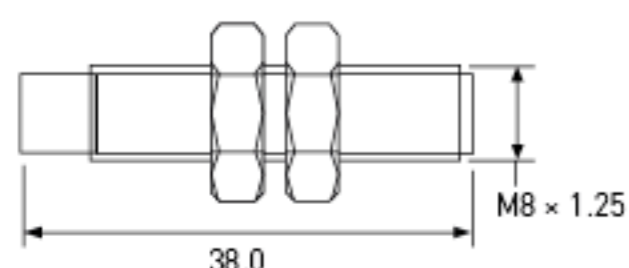

MSM-2210M

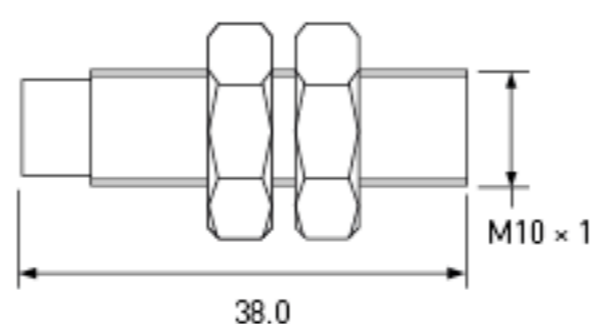

MSM-2212M


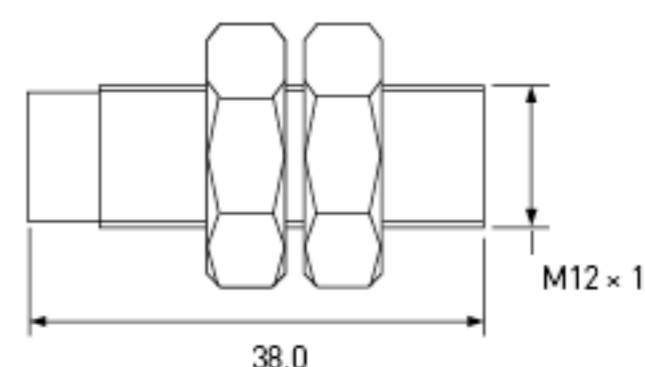


		MSM-225	MSM-226M	MSM-228	MSM-228M	MSM-2210M	MSM-2212M
Remanence Br	mT	1105	1105	1190	1190	1105	1105
Coercivity HcB	kA/m	836	836	828	828	836	836
Coercivity HcJ	kA/m	1274	1274	1274	1274	1274	1274
Energy Product (BH) max.	kJ/m ³	235	235	275	235	235	235
Magnetic moment M	x10 ⁻⁵ Vs cm	1.21	14.6	1.5	25.5	43.6	43.6
Operating Temperature max.	°C	85	85	85	85	85	85
UL/CSA/RoHS		--/--/•	--/--/•	--/--/•	--/--/•	--/--/•	--/--/•
Housing material		Nickel plated brass	Nickel plated brass	PA-GF	Nickel plated brass	Nickel plated brass	Nickel plated brass

All dimensions in mm. Subject to change without prior notice.


Level Sensors

[Combining a Reed Switch and a Floating Magnet into one unit for detecting liquid levels; one or more switching points possible.]

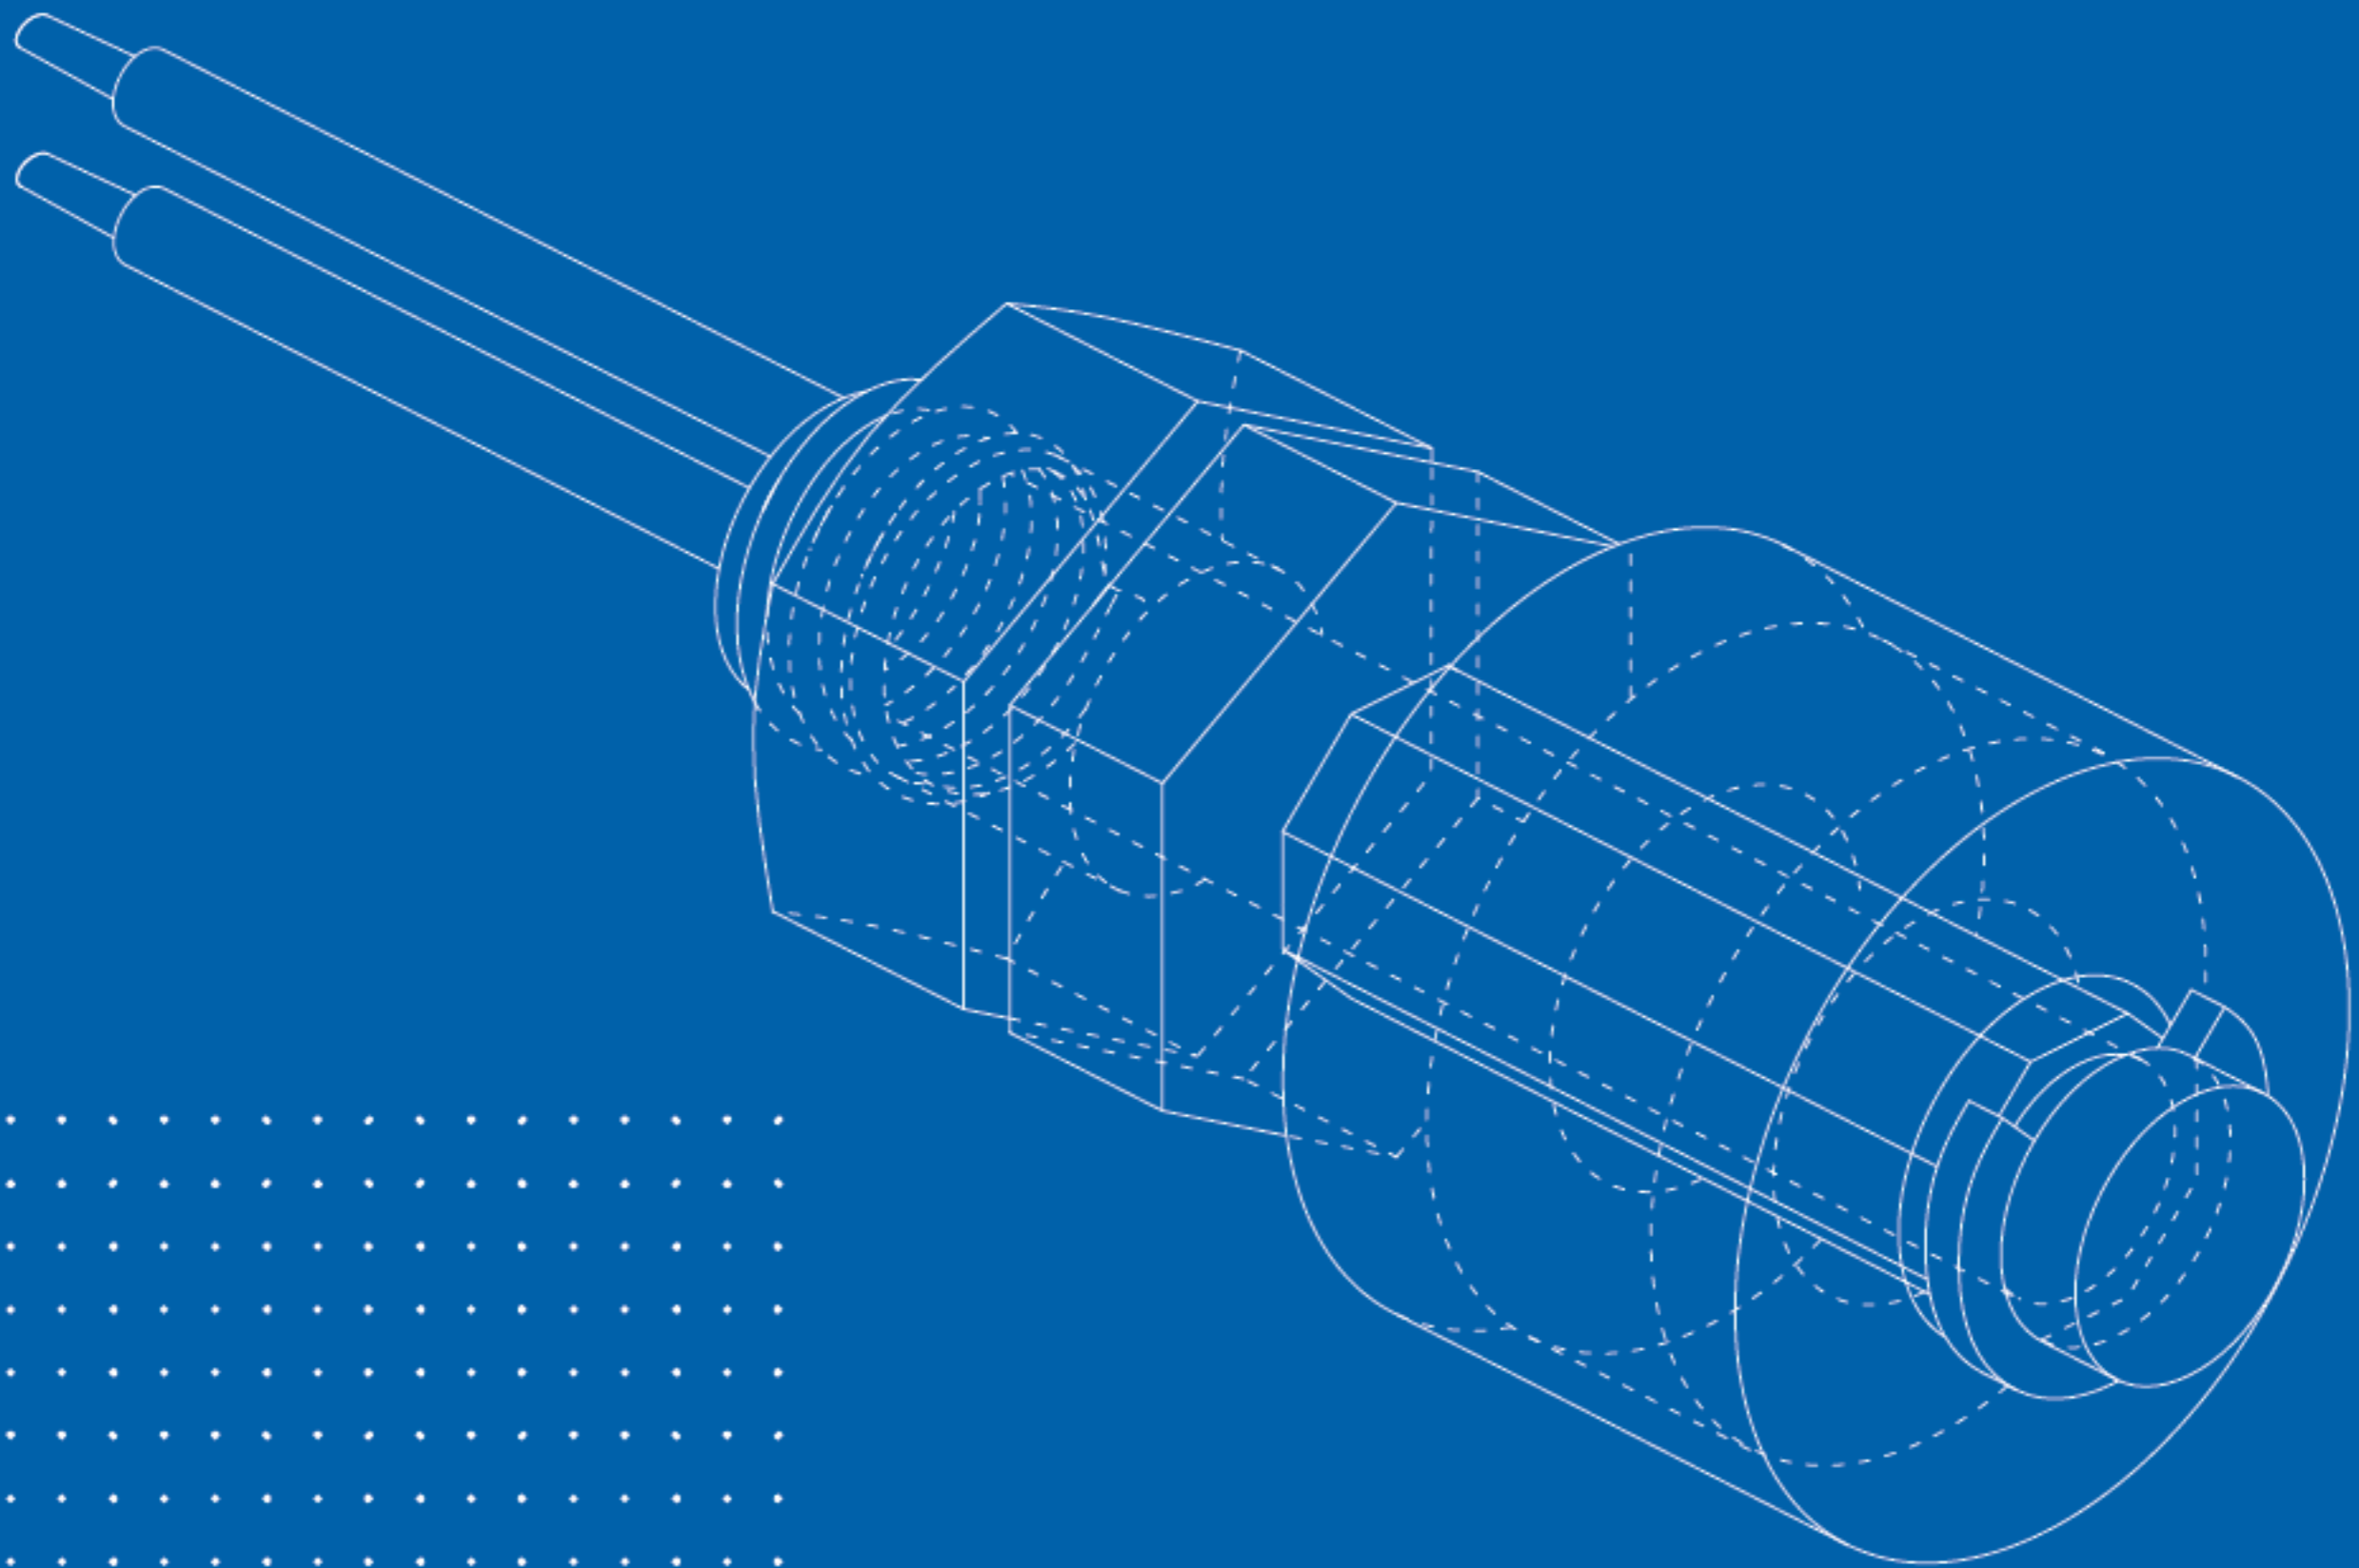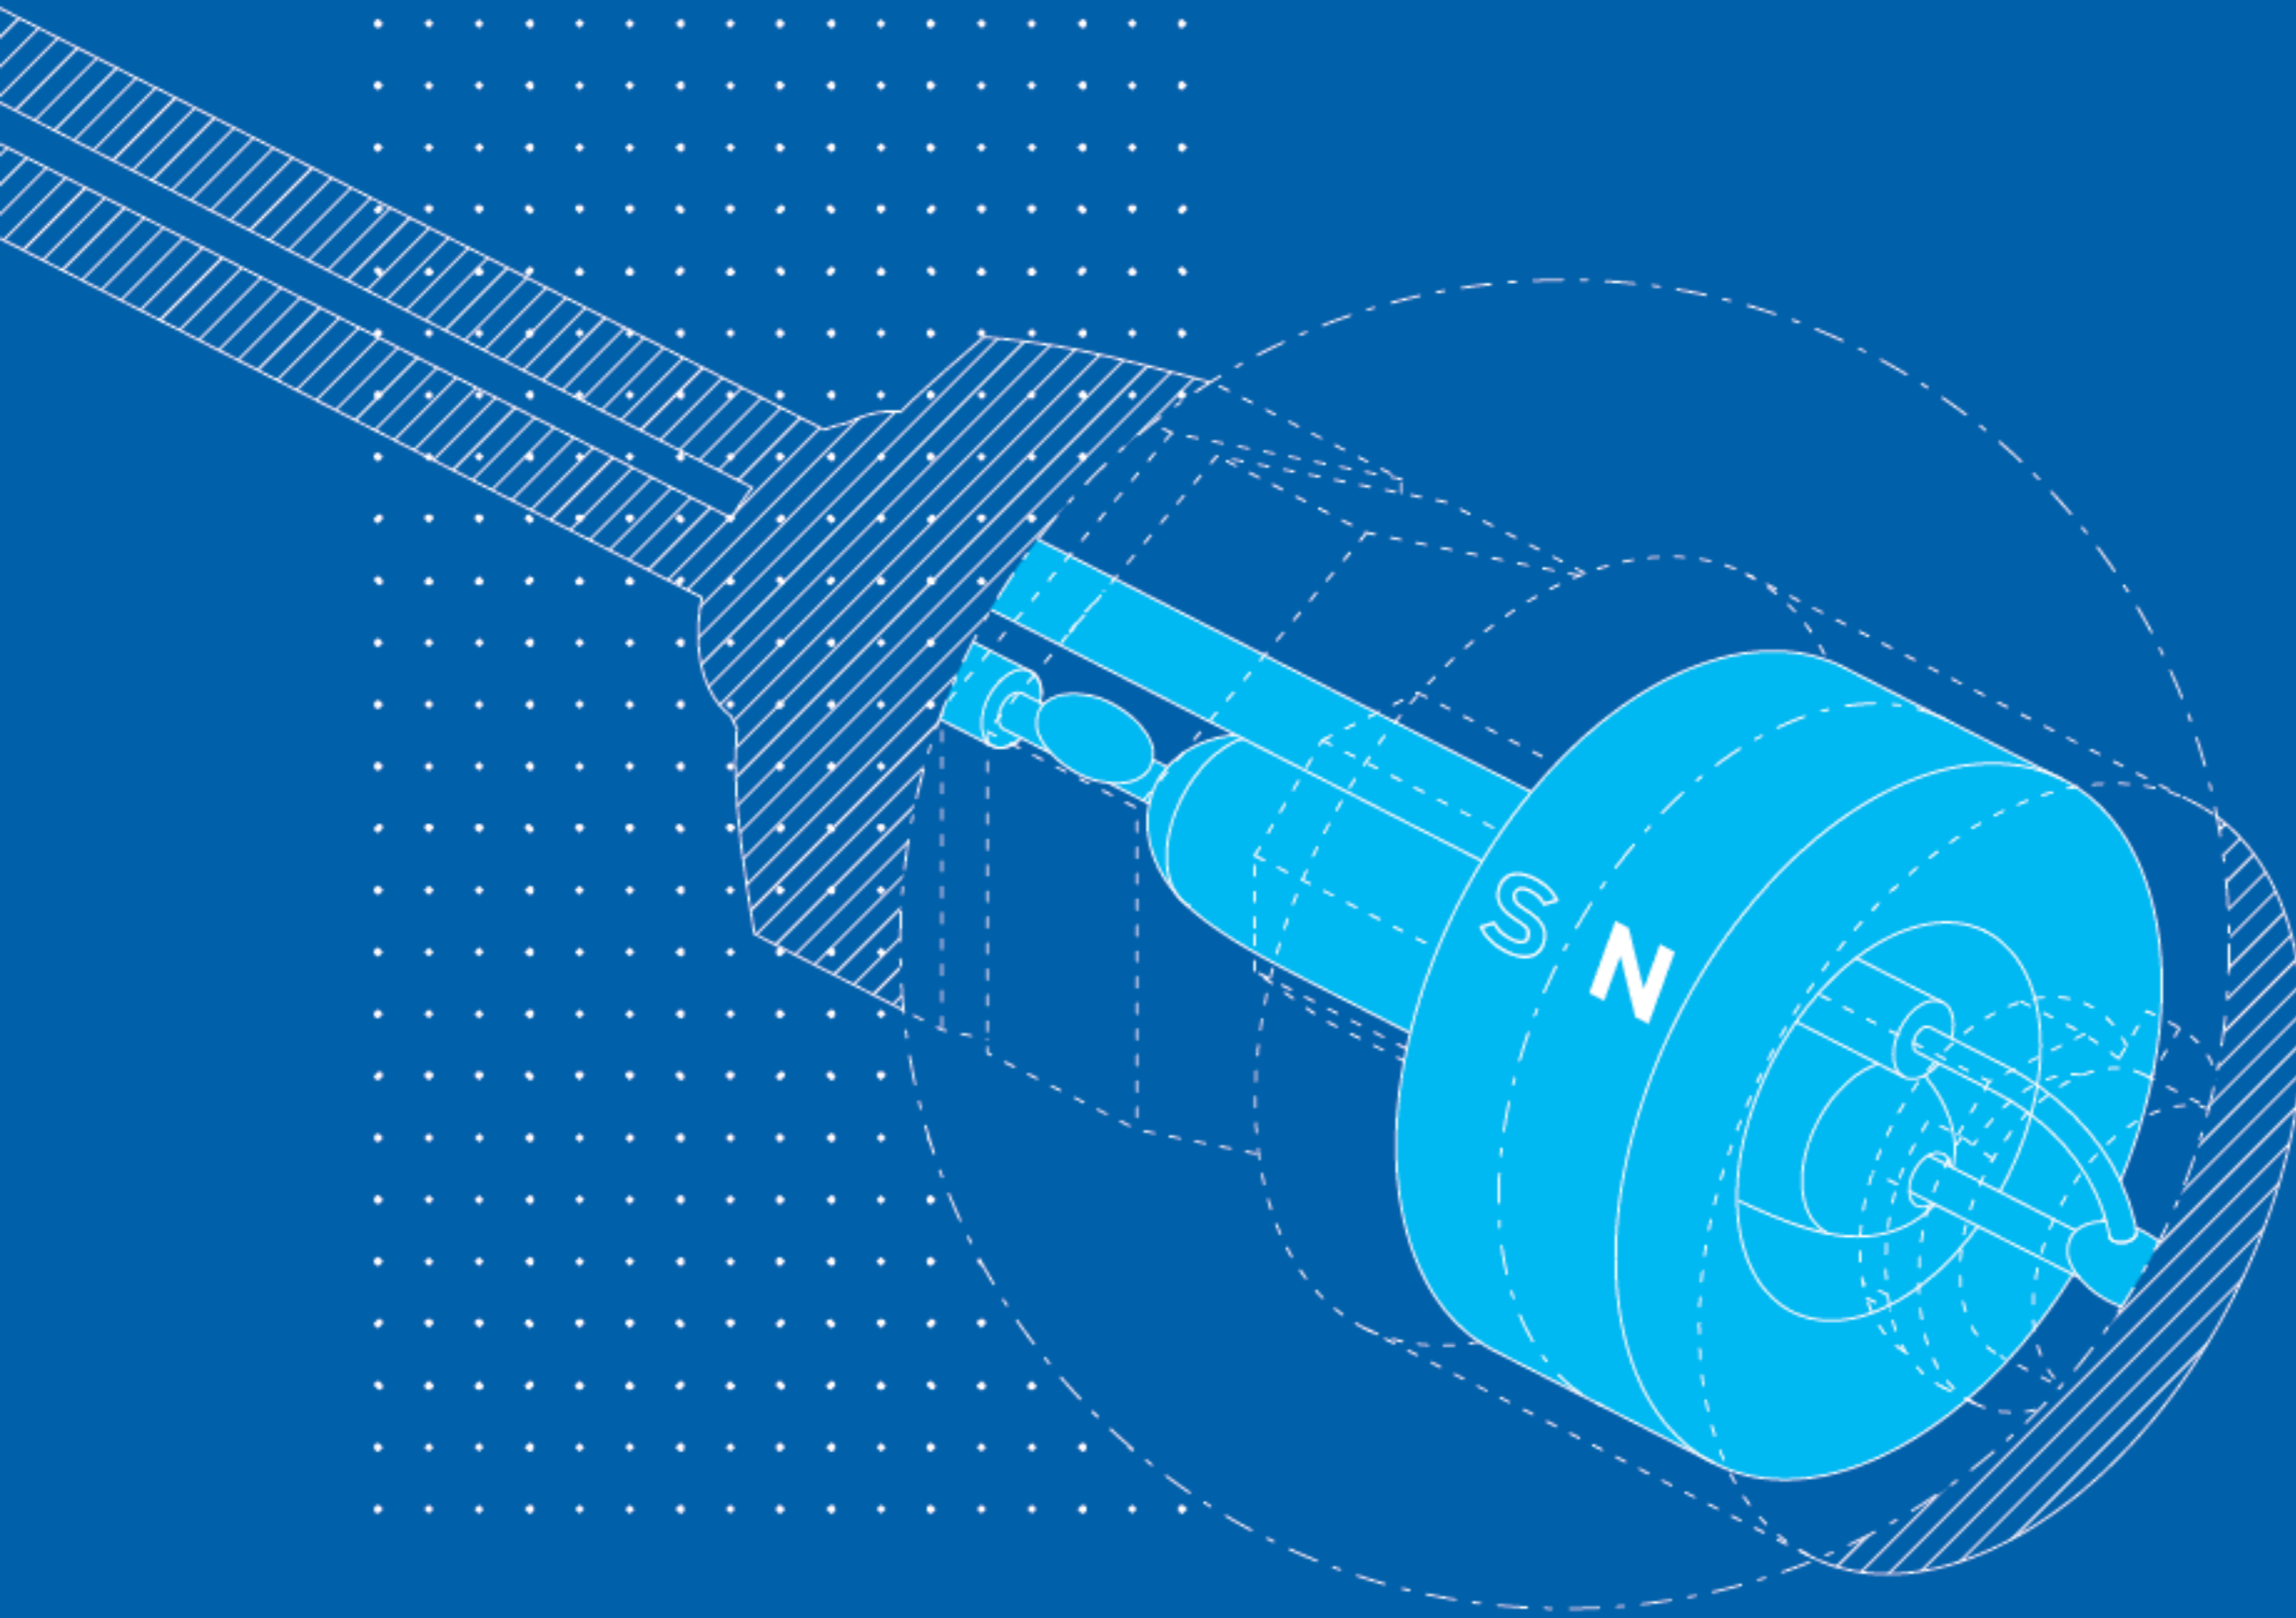

How does a Level Sensor work?


A Level Sensor incorporates a Reed Switch in a stem. An external float, with a magnet inside, passes and actuates the Reed Switch, depending on liquid level. Actuation principles for Reed Switches also apply to Level Sensors.

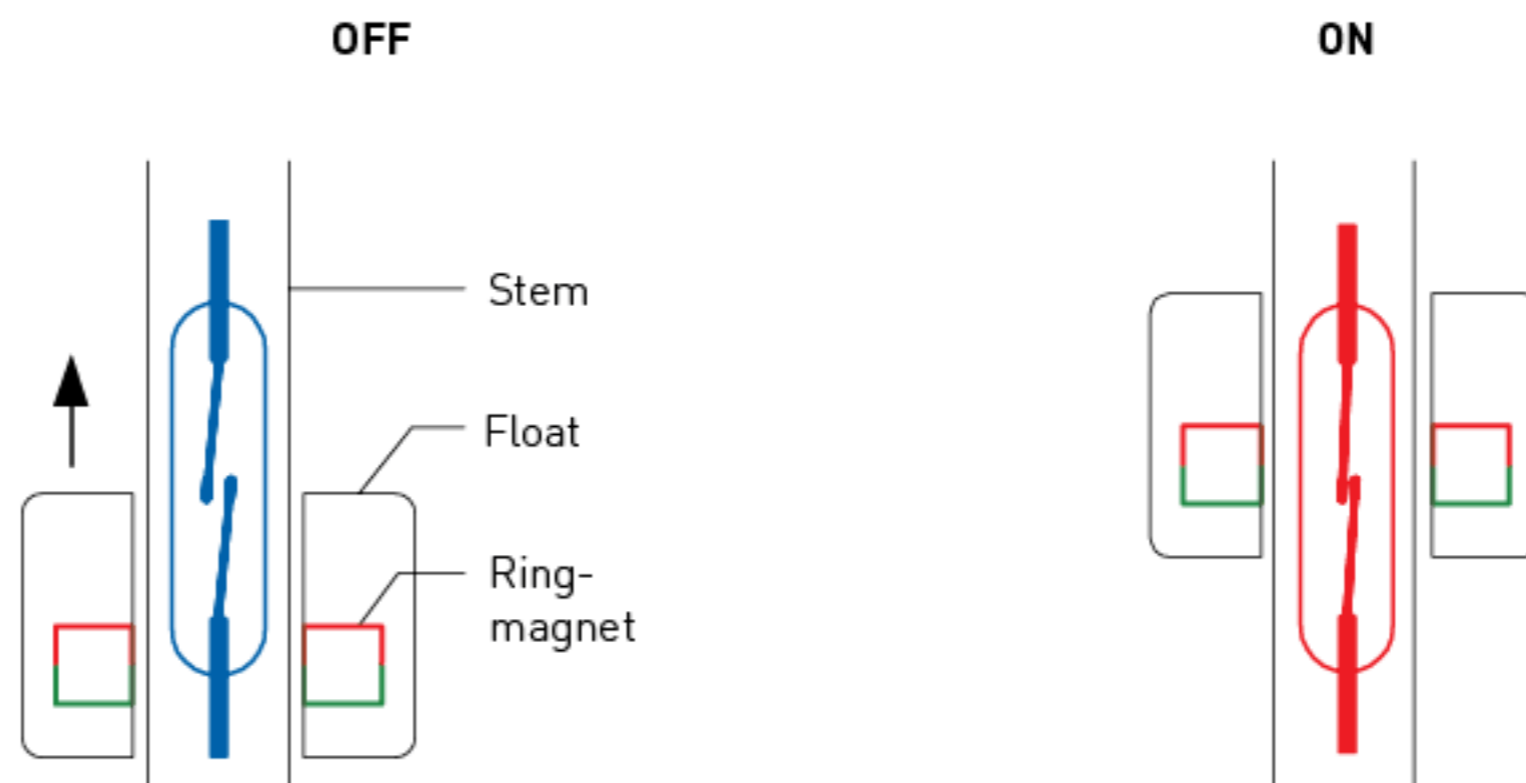

Benefits

- No power supply required
- Various housing materials available
- Form A and Form B
- Suitable for food contact
- Customized types available


FORM A (Normally open)

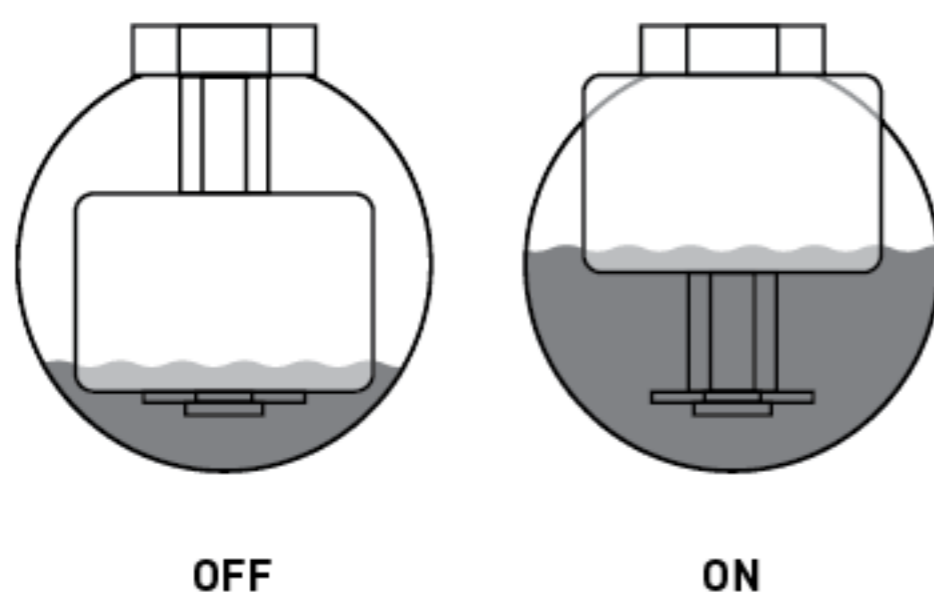


When mounted "stem up", operating functions are reversed.

Top mounting

Bottom mounting

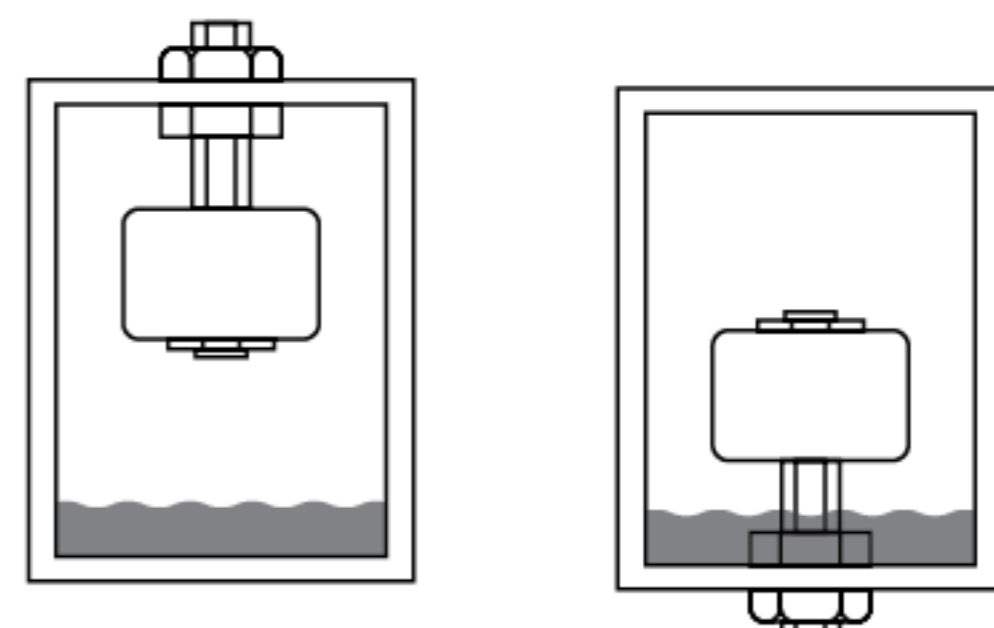



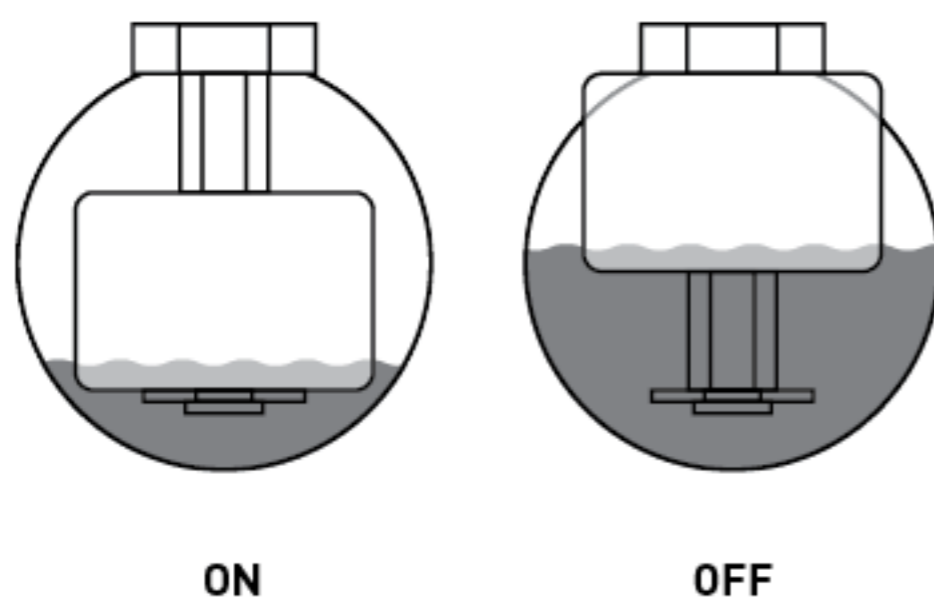


FORM B (Normally closed)




PLS-PP-Series

Features


-  Polypropylene housing
-  Form A and Form B
-  Suitable for food contact
-  Covers a wide range of applications
-  Customized types available




PLS-020 – World's smallest!

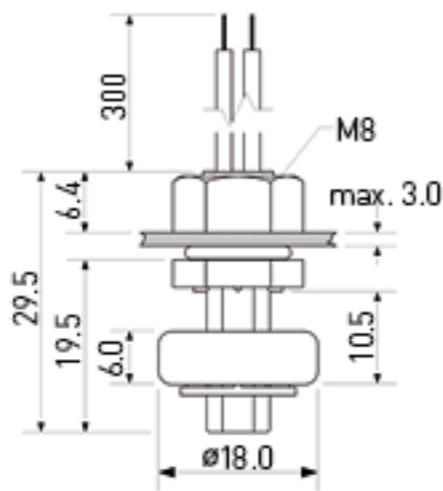

PLS-031 – Miniature

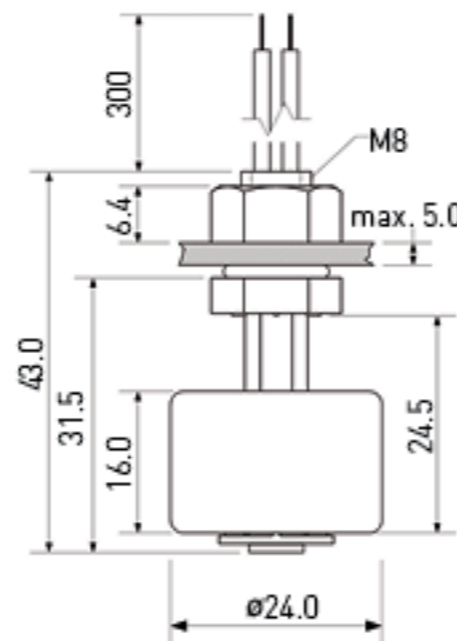

PLS-041 – Standard

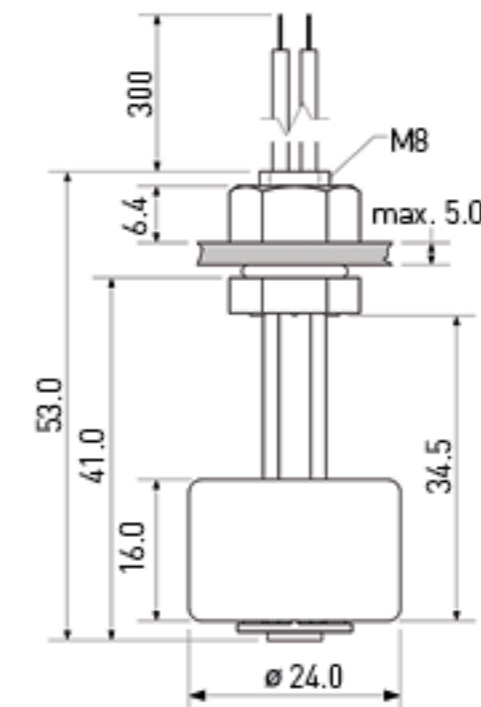


	Power Switch					
	PLS-020A-3PP	PLS-020B-3PP	PLS-031A-3PP PLS-041A-3PP	PLS-031B-3PP PLS-041B-3PP	PLS-031A-6PP PLS-041A-6PP	PLS-031B-6PP PLS-041B-6PP
Contact form	A B		A B		A B	
Contact rating max.	W/VA	10		10		50
Switching current max.	A	0.7		1		1.5
Carry current max.	A	1		1.2		2
Switching voltage max.	VDC	180		200		200
	VAC	130		140		250
Breakdown voltage min.	VDC	200		240		400
Operating Temperature	°C	-20 to +80		-20 to +80		-20 to +80
UL/CSA/RoHS		•/•/•		•/•/•		•/•/•
Housing material		PP		PP		PP
Cable type		AWG 24		AWG 24		AWG 22

Features

Customized types available

PP float material

POM housing material

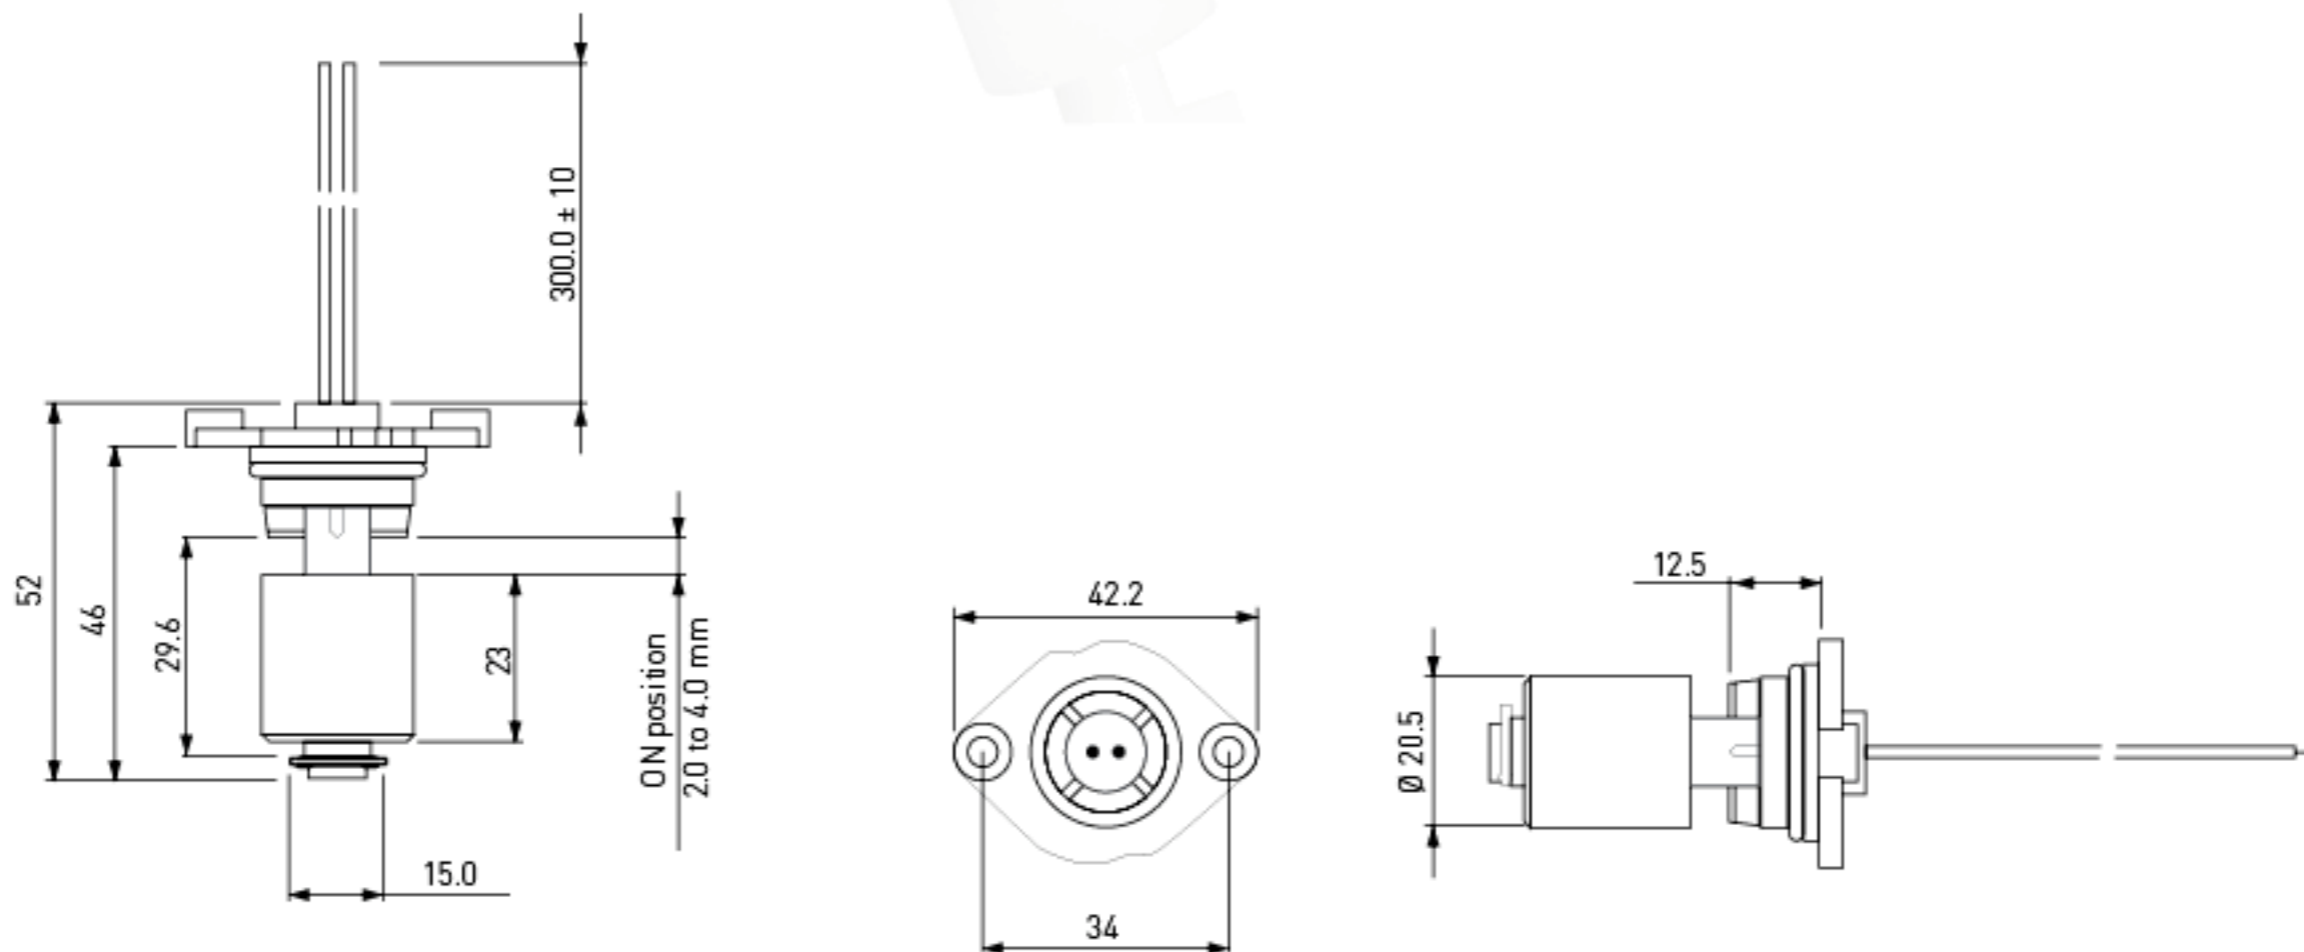






		Power Switch			
		PLS-051A-3PPI	PLS-051B-3PPI	PLS-051A-6PPI	PLS-051B-6PPI
Contact form		A	B	A	B
Contact rating max.	W/VA	10		50	
Switching current max.	A	0.5		1.5	
Carry current max.	A	1		2	
Switching voltage max.	VDC	200		200	
	VAC	140		250	
Breakdown voltage min.	VDC	250		400	
Operating Temperature	°C	- 20 to + 80		- 20 to + 80	
UL/CSA/RoHS		--/--/•		--/--/•	
Housing material		PP, POM			
Cable type		AWG 24			

Pls. refer page 49 for additional information on housing material and media. All dimensions in mm. Subject to change without prior notice.


PLS-PA-Series

Features


-  Polyamide housing
-  Form A and Form B
-  Suitable for food contact
-  Covers a wide range of applications
-  Customized types available



PLS-031 – Miniature

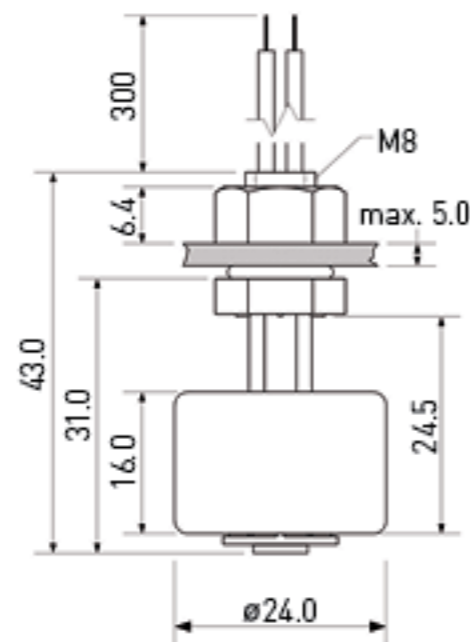

PLS-041 – Standard

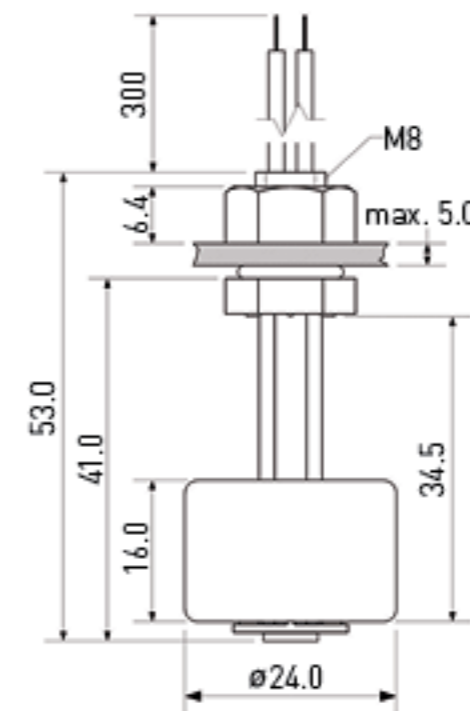

		Power Switch			
		PLS-031A-3PA PLS-041A-3PA	PLS-031B-3PA PLS-041B-3PA	PLS-031A-6PA PLS-041A-6PA	PLS-031B-6PA PLS-041B-6PA
		A	B	A	B
Contact form		A	B	A	B
Contact rating max.	W/VA	10		50	
Switching current max.	A	1		1.5	
Carry current max.	A	1.2		2	
Switching voltage max.	VDC	200		200	
	VAC	140		250	
Breakdown voltage min.	VDC	240		400	
Operating Temperature	°C	-20 to +80		-20 to +80	
UL/CSA/RoHS		•/•/•		•/•/•	
Housing material		PA		PA	
Cable type		AWG 24		AWG 22	

Pls. refer page 49 for additional information on housing material and media. All dimensions in mm. Subject to change without prior notice.


PLS-VA-Series

Features


-  Stainless Steel housing
-  Rugged & durable
-  Form A and Form B
-  Suitable for food contact
-  Extended temperature range
-  Customized types available




PLS-045

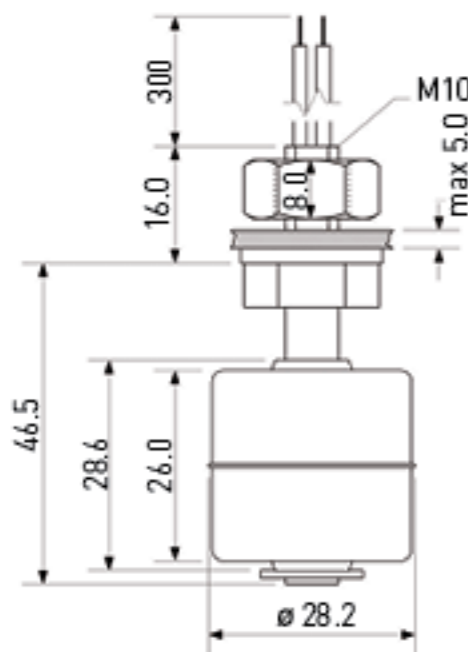

PLS-080

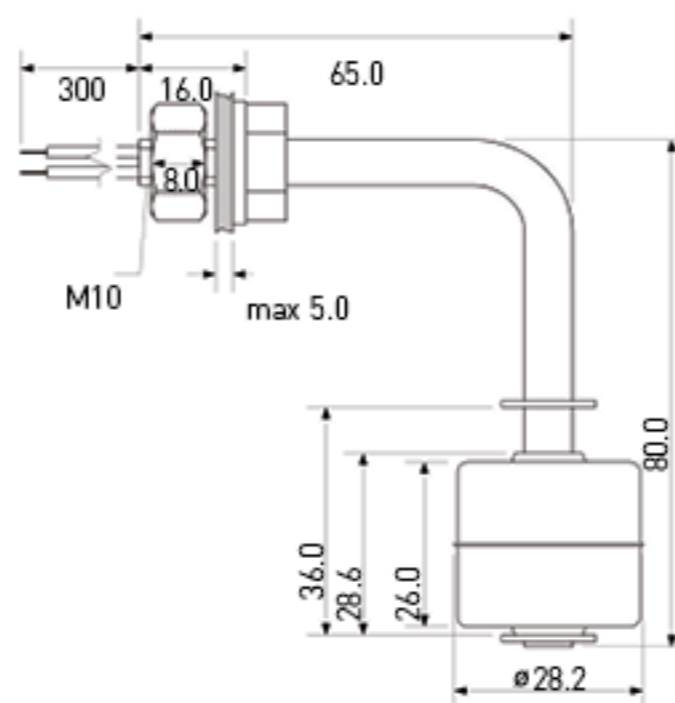

PLS-081

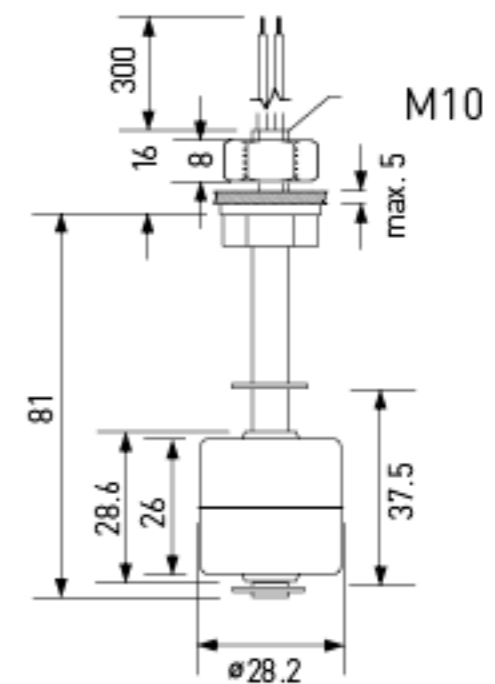

Power Switch


PLS-045A-3VAI	PLS-045B-3VAI	PLS-045A-6VAI	PLS-045B-6VAI
PLS-080A-3VAL	PLS-080B-3VAL	PLS-080A-6VAL	PLS-080B-6VAL
PLS-081A-3VAI	PLS-081B-3VAI	PLS-081A-6VAI	PLS-081B-6VAI



		A	B	A	B
Contact form		A	B	A	B
Contact rating max.	W/VA	10		50	
Switching current max.	A	1		1,5	
Carry current max.	A	1,2		2	
Switching voltage max.	VDC	200		200	
	VAC	140		250	
Breakdown voltage min.	VDC	240		400	
Operating Temperature	°C	-40 to +125		-40 to +125	
UL/CSA/RoHS		•/•/•		•/•/•	
Housing material		Stainless Steel 304		Stainless Steel 304	
Cable type		AWG 24		AWG 22	

Pls. refer page 49 for additional information on housing material and media. All dimensions in mm. Subject to change without prior notice.

PLS-PPH

Features

-  Assembly from outside
-  Level Sensors for horizontal mounting
-  Polypropylene housing
-  Covers a wide range of applications

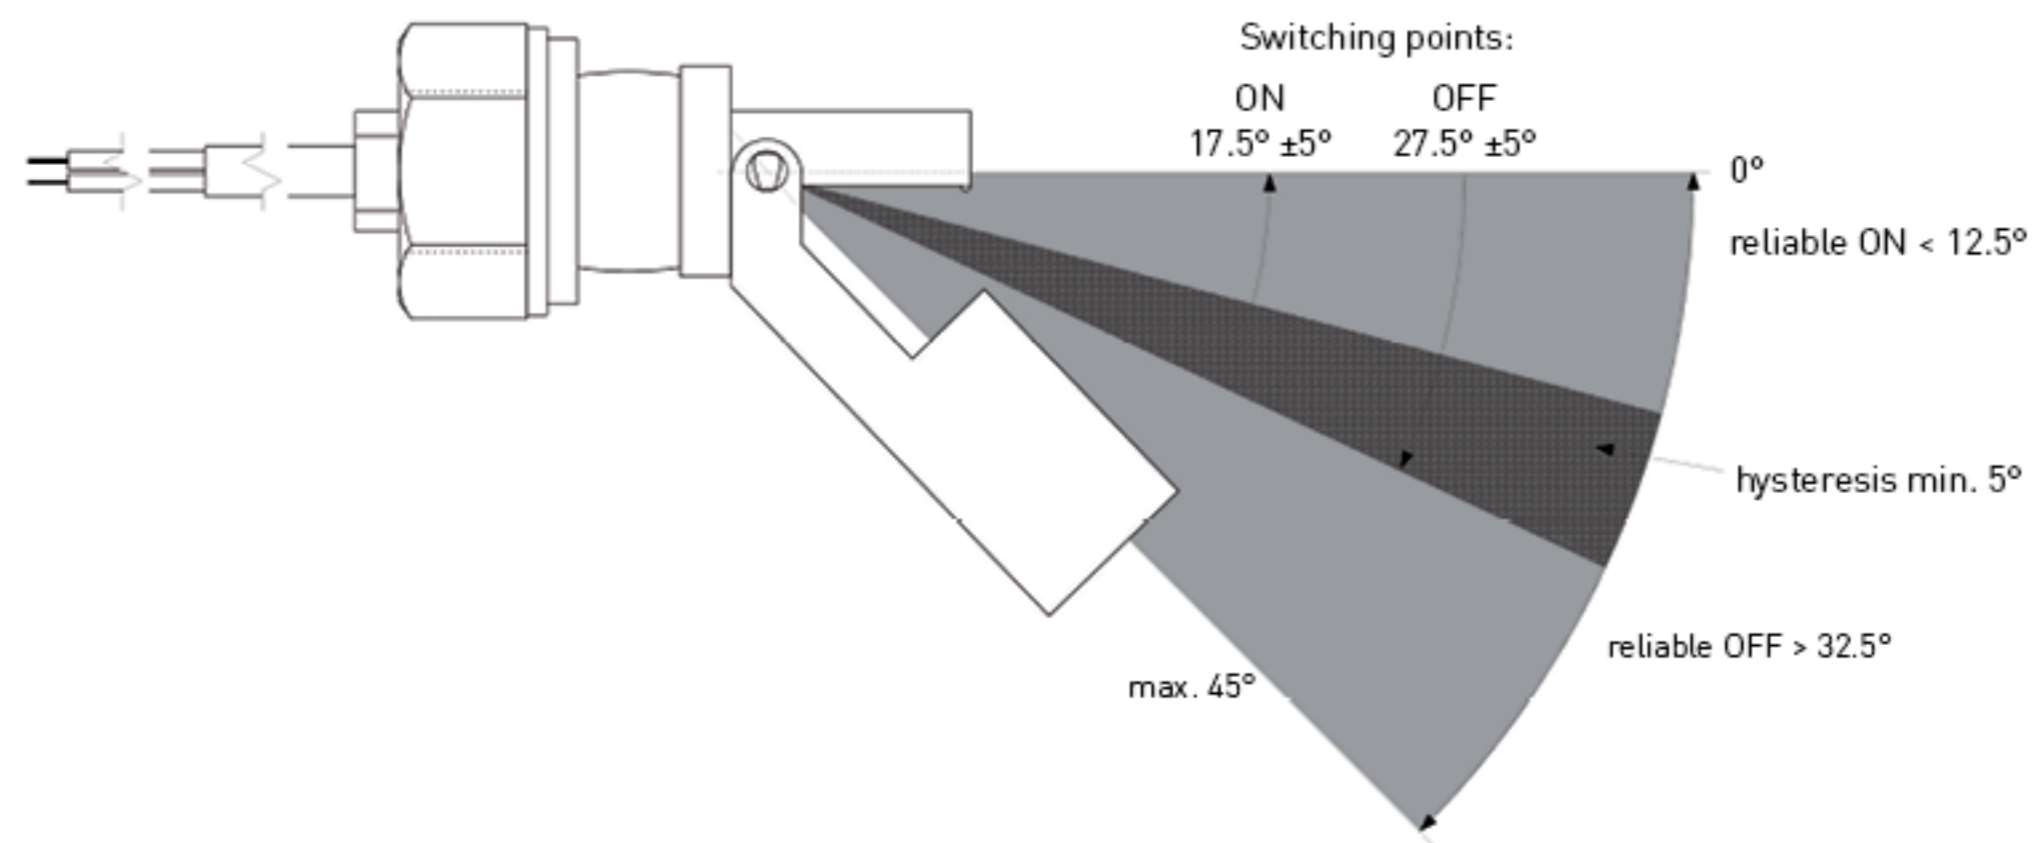
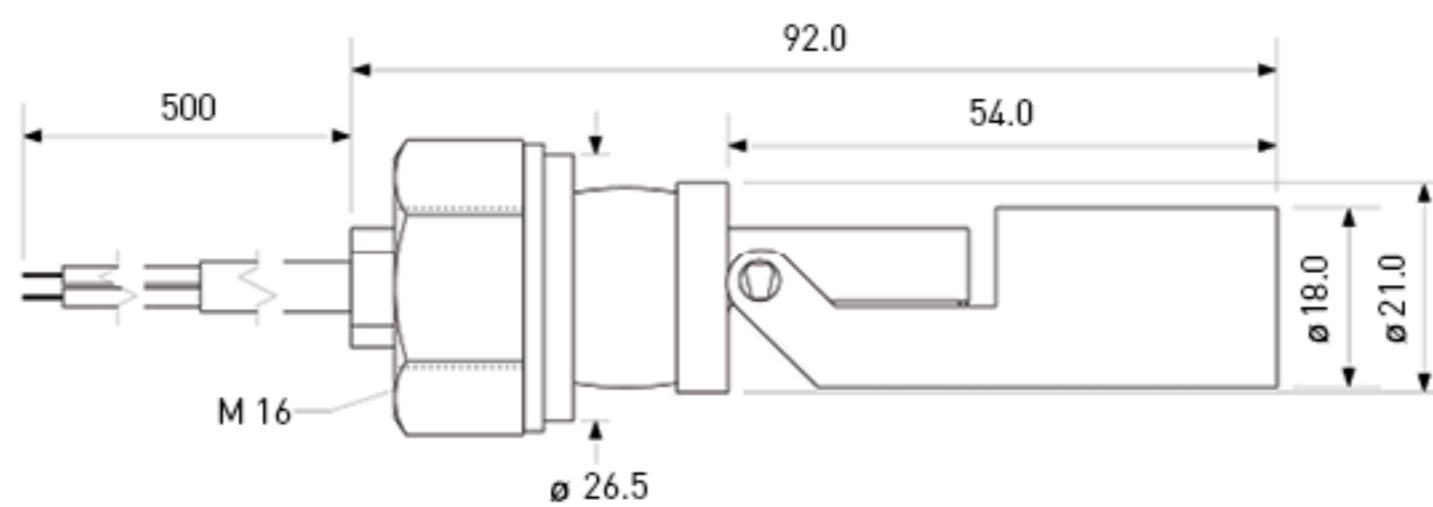


		PLS-092A-3PPH	PLS-092A-6PPH
Contact form		A	A
Contact rating max.	W/VA	10	50
Switching current max.	A	1	1.5
Carry current max.	A	1.2	2
Switching voltage max.	VDC	200	200
	VAC	140	250
Breakdown voltage min.	VDC	240	400
Operating Temperature	°C	-20 to +65	-20 to +65
UL/CSA/RoHS		--/--/•	--/--/•
Housing material		PP	PP
Cable type		AWG 22	AWG 22

Pls. refer page 49 for additional information on housing material and media. All dimensions in mm. Subject to change without prior notice.


Customized Products

[Customer specific, tailor made Sensing Solutions; fully adjusted to their targeted application; taking assembly situation, electrical parameters and design needs into consideration.]

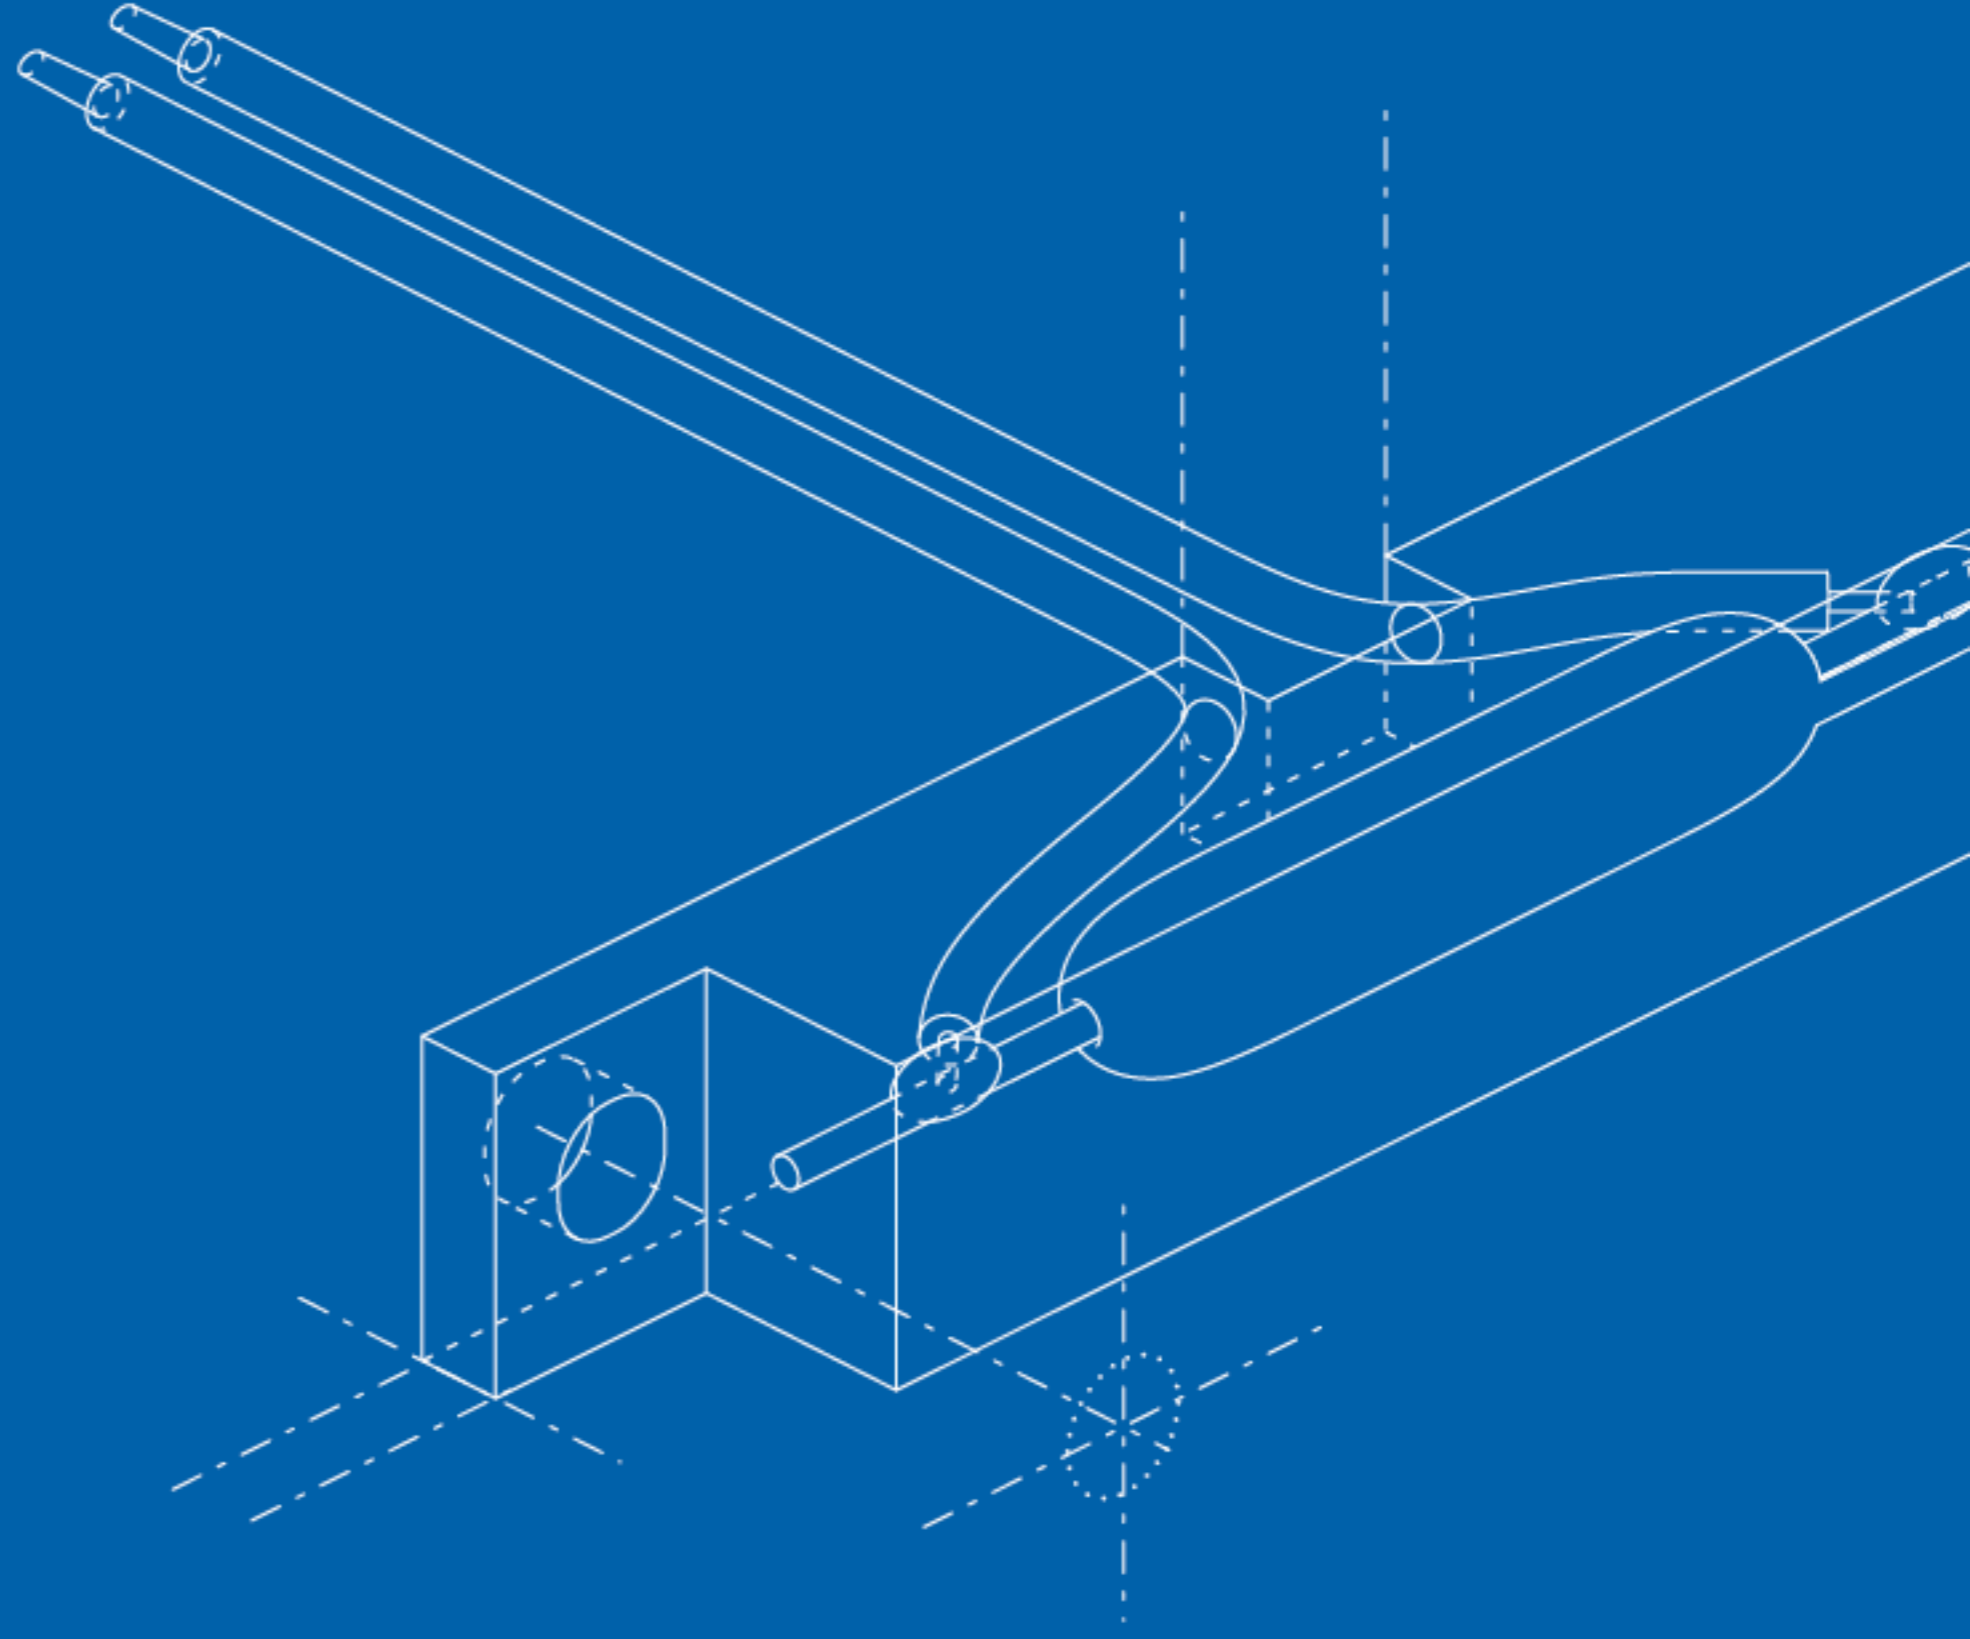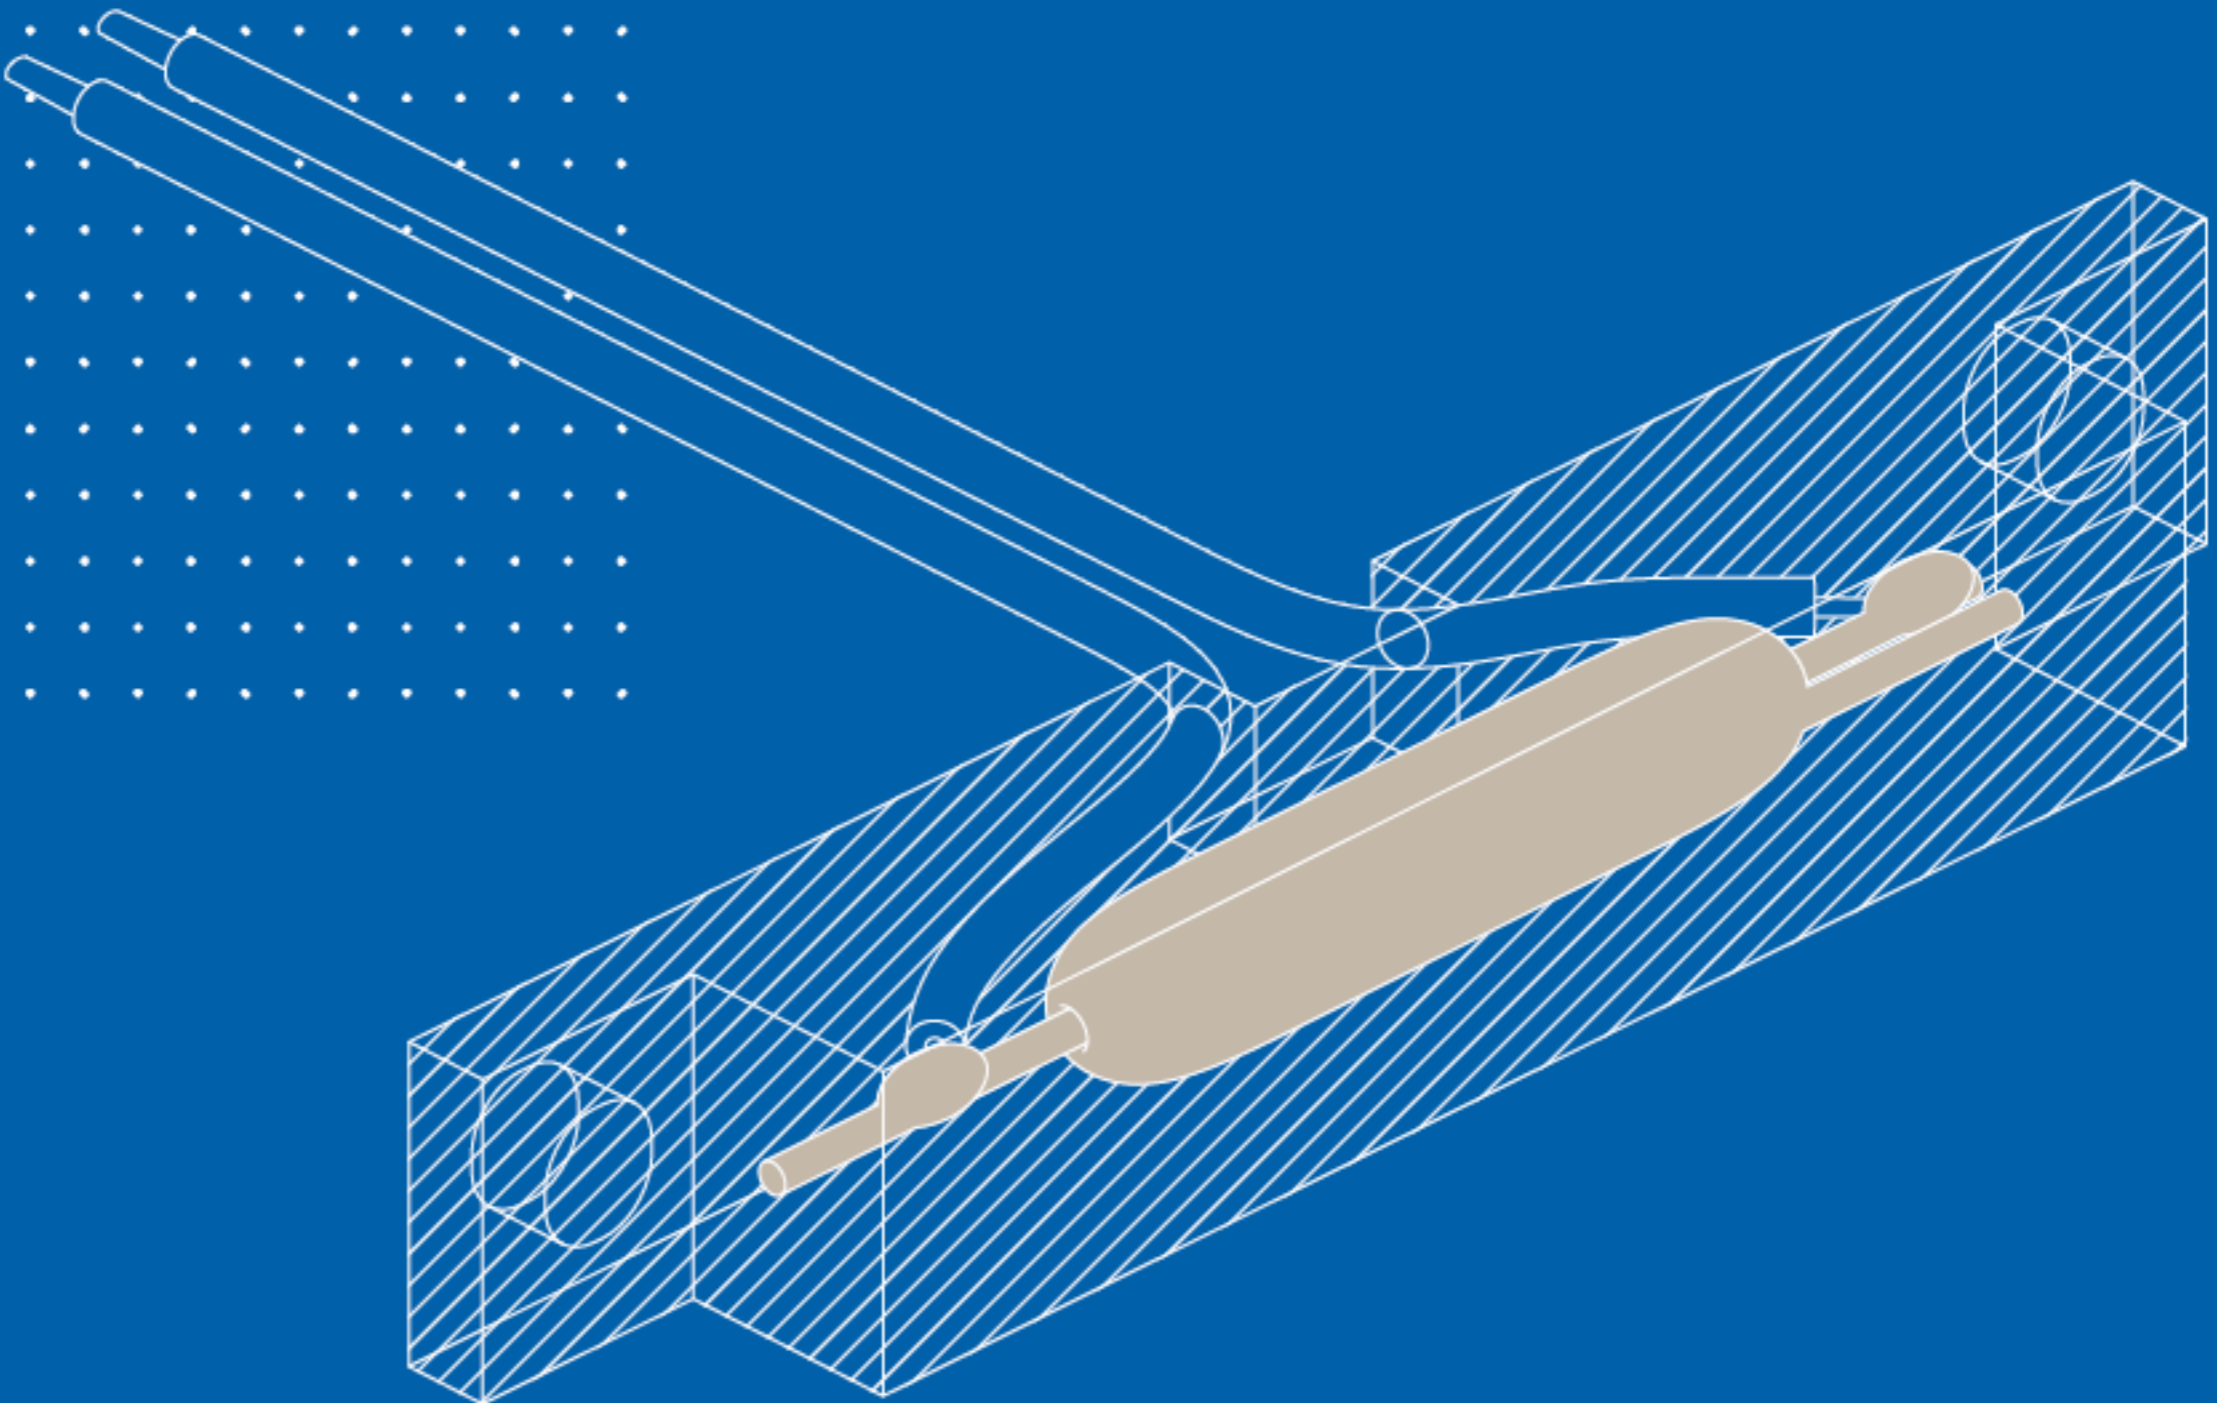

Basics

How do Customized Products work?

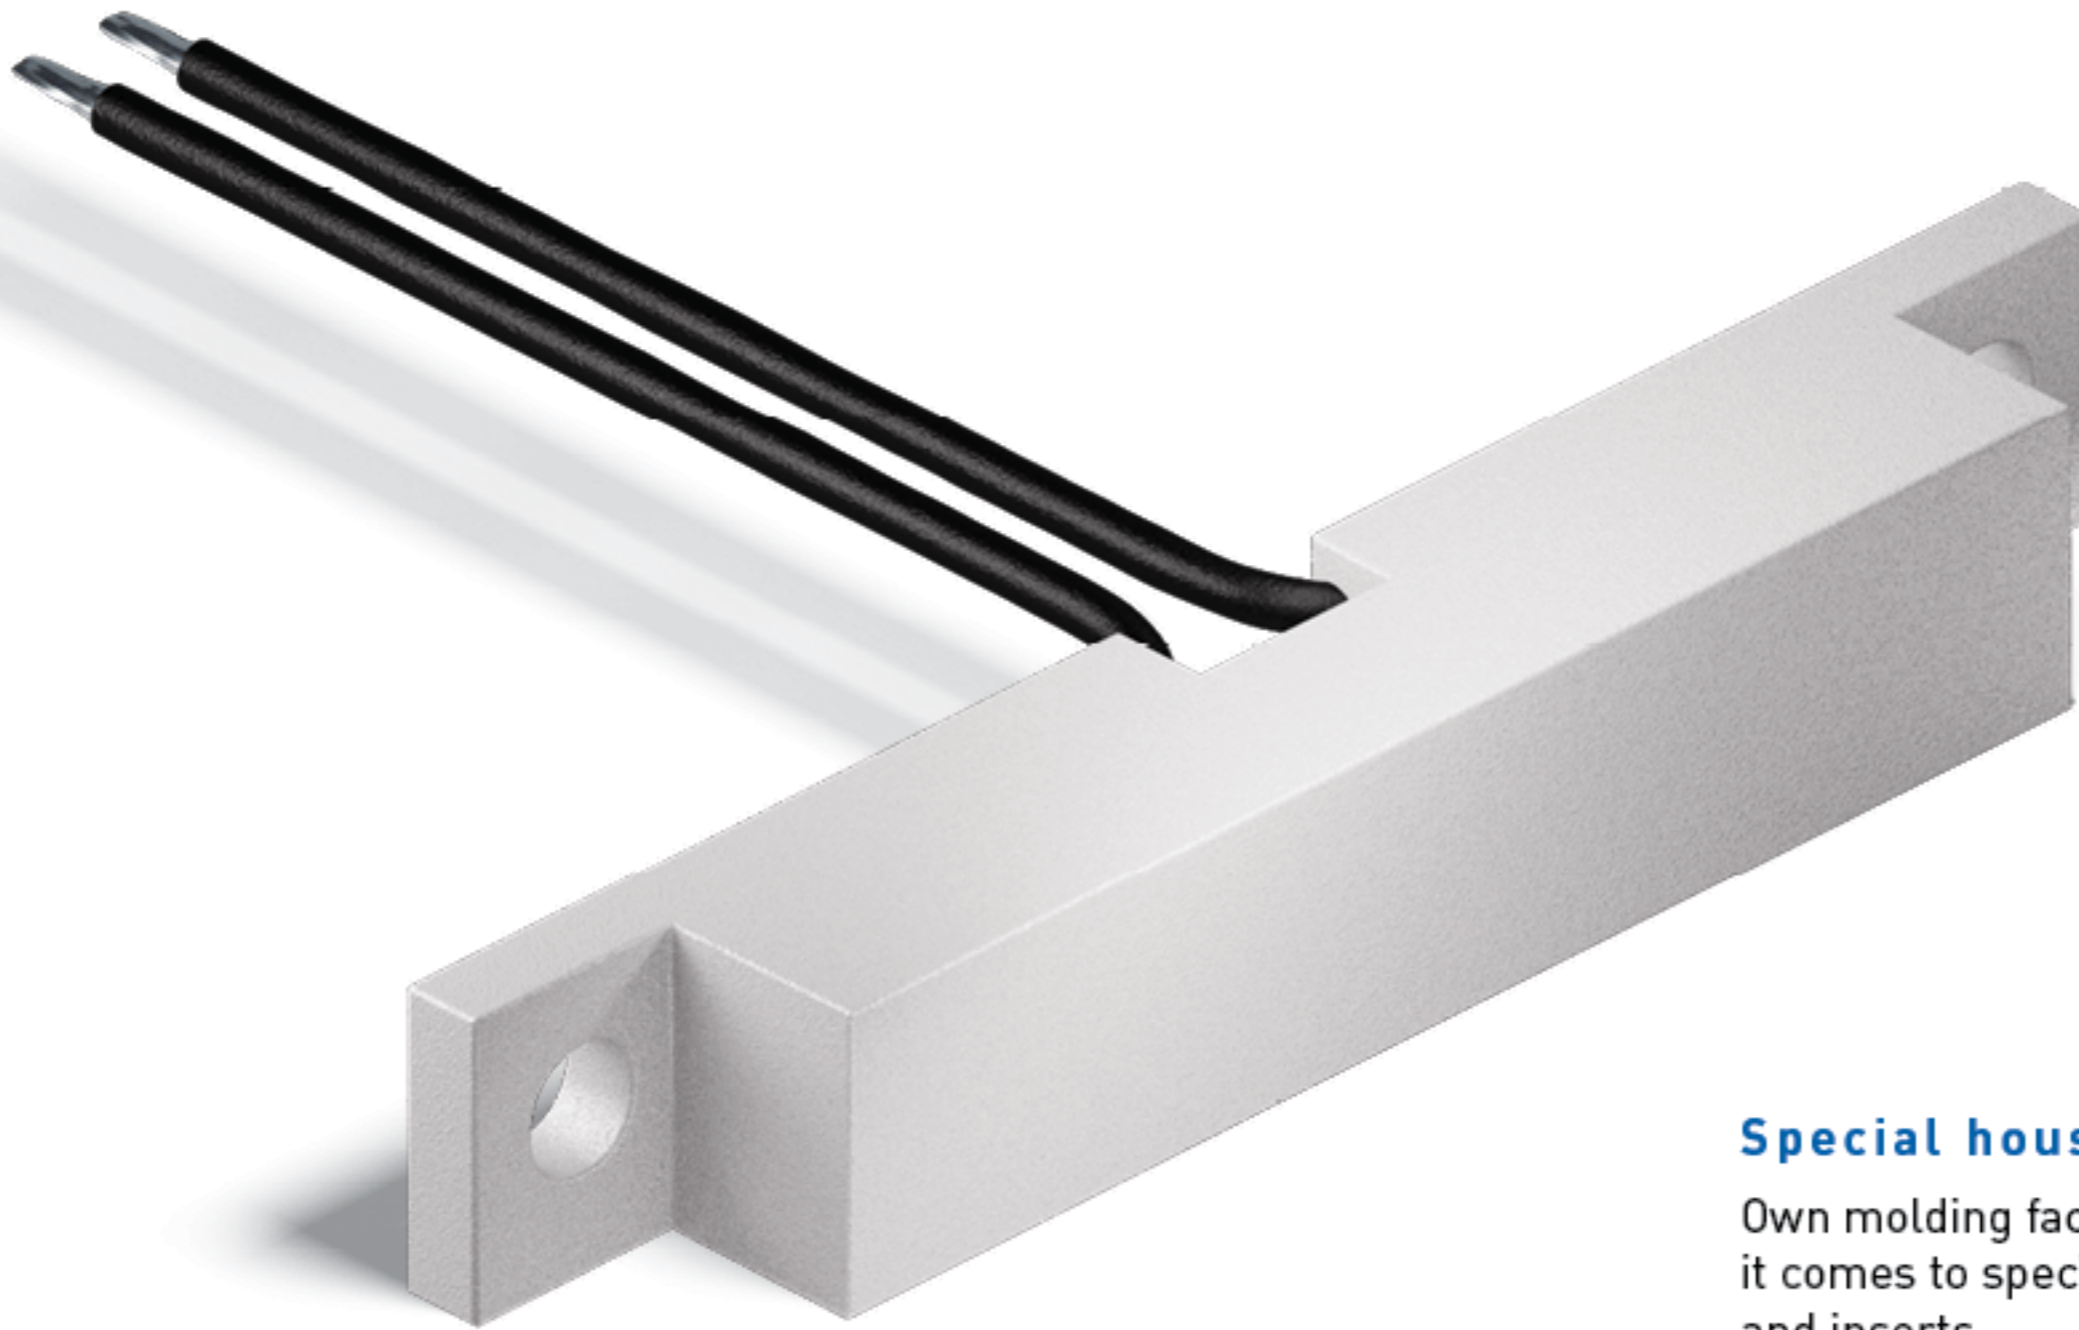

Special housings

Own molding facilities spell flexibility when it comes to special housings, snap-fit solutions and inserts.

Depending on your application and the depth of needed specialization we consider a customized product to be a standard product with a reasonable grade of customization to create a cost efficient and safe to assemble sensor product.

Customer specific changes to our standard products could be the change of cable length and color, the attachment of terminals

or connectors, the usage of specific material (e.g. high temperature suitable) or the complete design and manufacturing of individual sensor housings.

Also Reed Switches can be customized to your needs by cutting and/or bending them at PIC – the simple and safe way to get a reliable switching element!

Benefits


- /// Simple and safe assembly processes
- /// No need to send Sensors and Switches to third party suppliers
- /// Quality check and outgoing inspection through PIC, saves costs and minimizes scrap rates

Over 80% of our products are special custom designs.



Connectors and cable assemblies

Sensor solutions + wire harnesses:
Taylor made to your requirements including RAST-Assembly

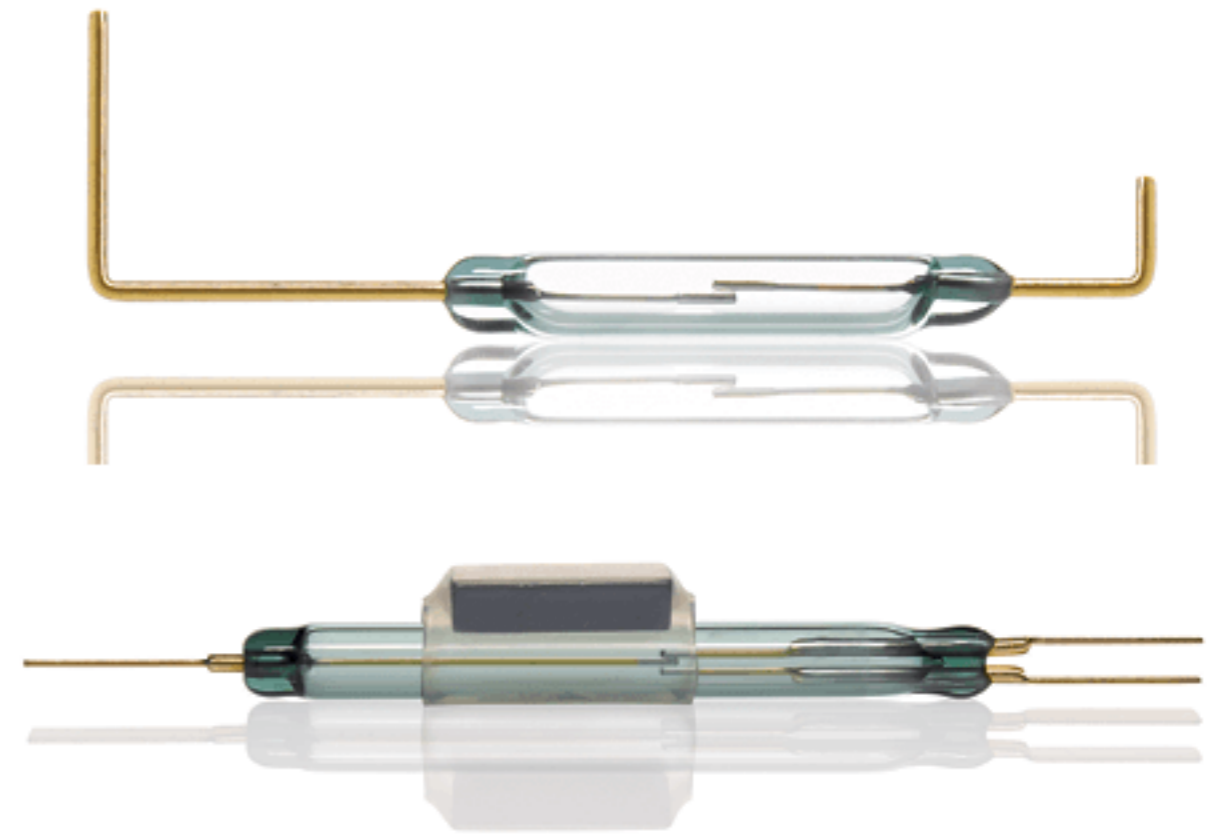


Modified Reed Switches

We modify Reed Switches to your specific needs: Cutting, bending and even making them bistable – all done by experts in our own factories!



Customized Level Sensors

We can do much more than what you see in this catalogue.

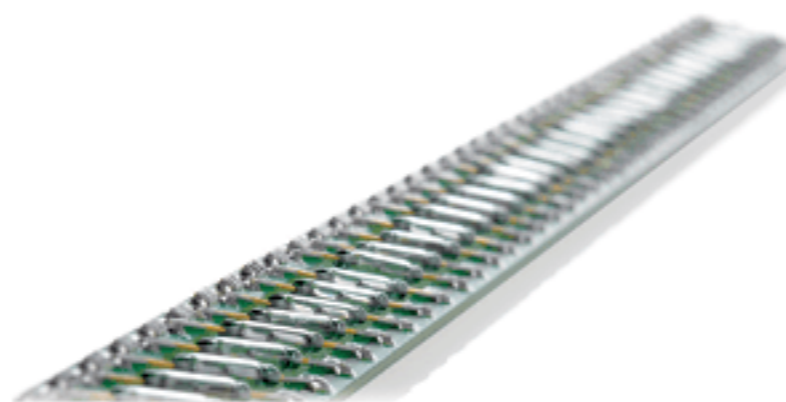

PCB-Assemblies

Where large quantities in particular are concerned, assembly costs can make or break a product. We will be happy to supply Reed Switches and other components as fully assembled PCBs including cable and connector at highly competitive prices.




Flow Detection

Individual solutions for flow detection or even flow measuring, tailor made for your application.


Technology

[Property and behavior of Reed Switches and Reed Sensors; divisible into electrical and mechanical properties.]

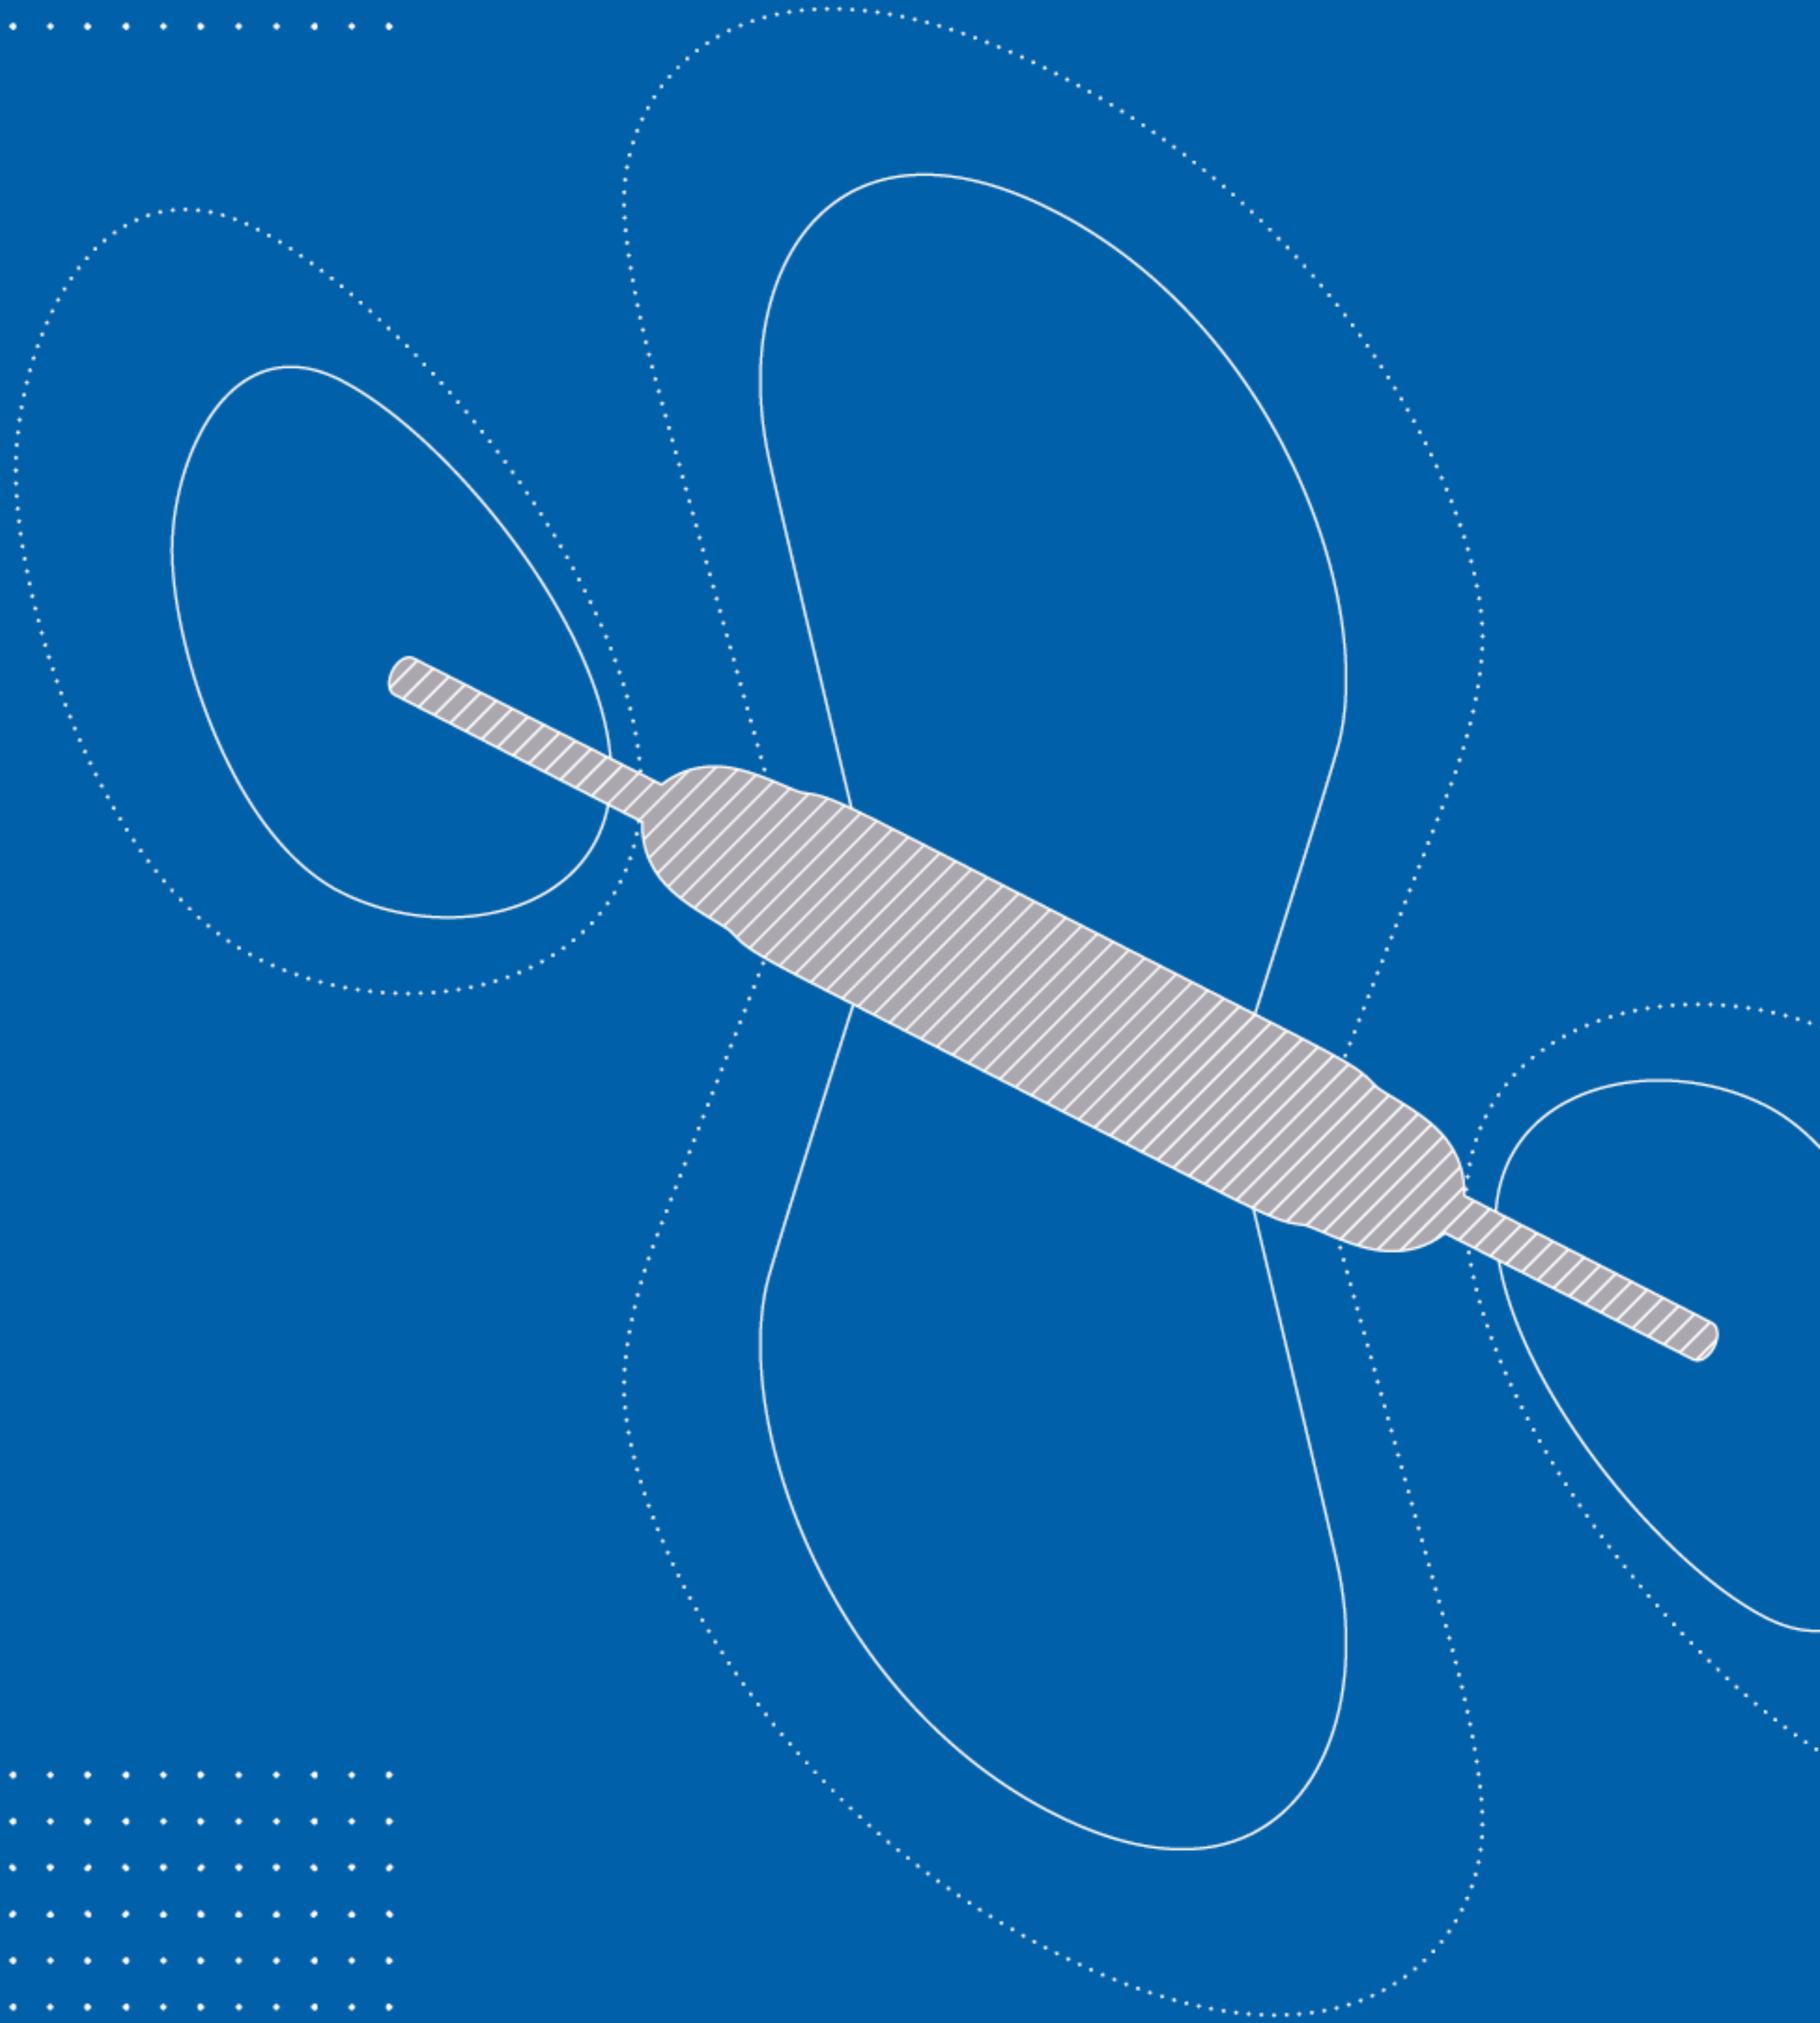


In general four different magnet approaches are known when using permanent magnets


1 **One magnet pole** faces Reed Switch providing **two** operations max. when moving on X-axis. Minimum movement of magnet over switch center provides smallest possible switching differential.

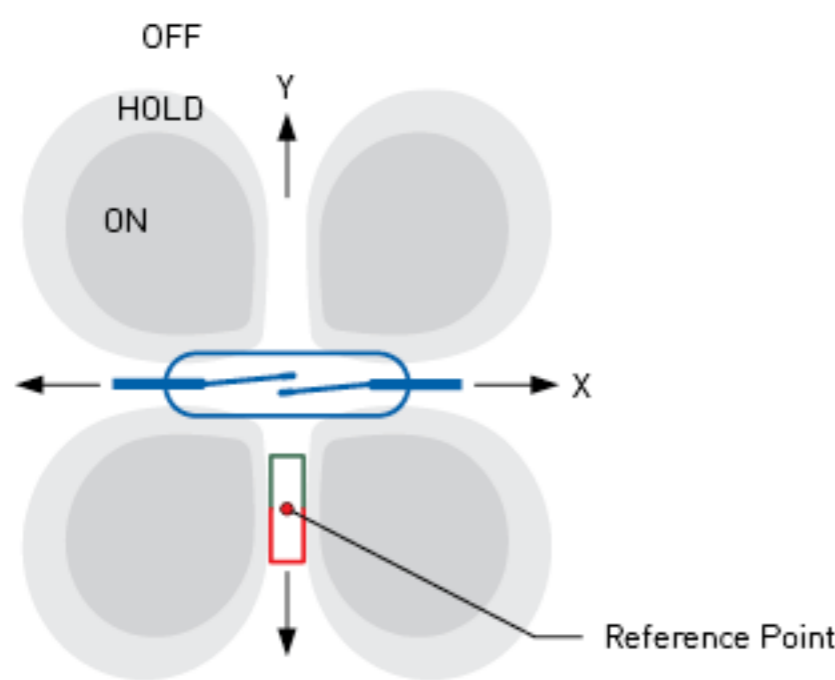


2 **Magnet parallel to longitudinal axis of switch:** Approaching magnet vertically to switch on Y-axis provides one operation only. Driving magnet over full length of switch (X-axis) may result in up to three operations. Minimum movement of magnet over switch center provides smallest possible switching differential.

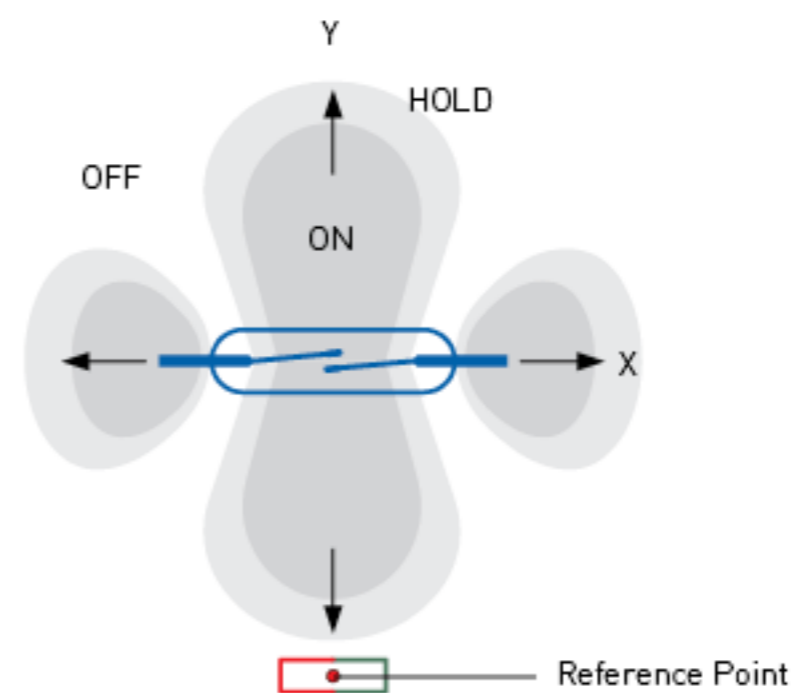

3 Switch operation by **rotation** of magnet. This gives two operations per complete rotation.

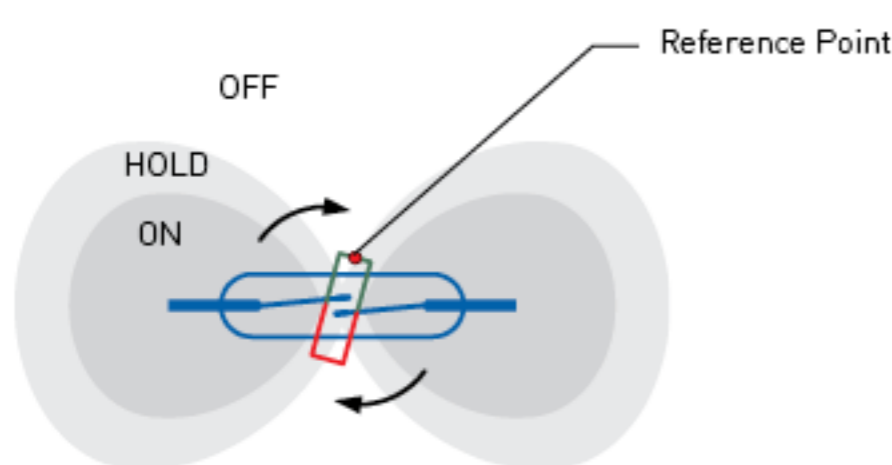

4 Operation of switch by **shielding**. This method requires a permanently opposite location of magnet and switch. The switch is held closed continuously and will release only if magnet flux is removed by means of ferro-magnetic shield.

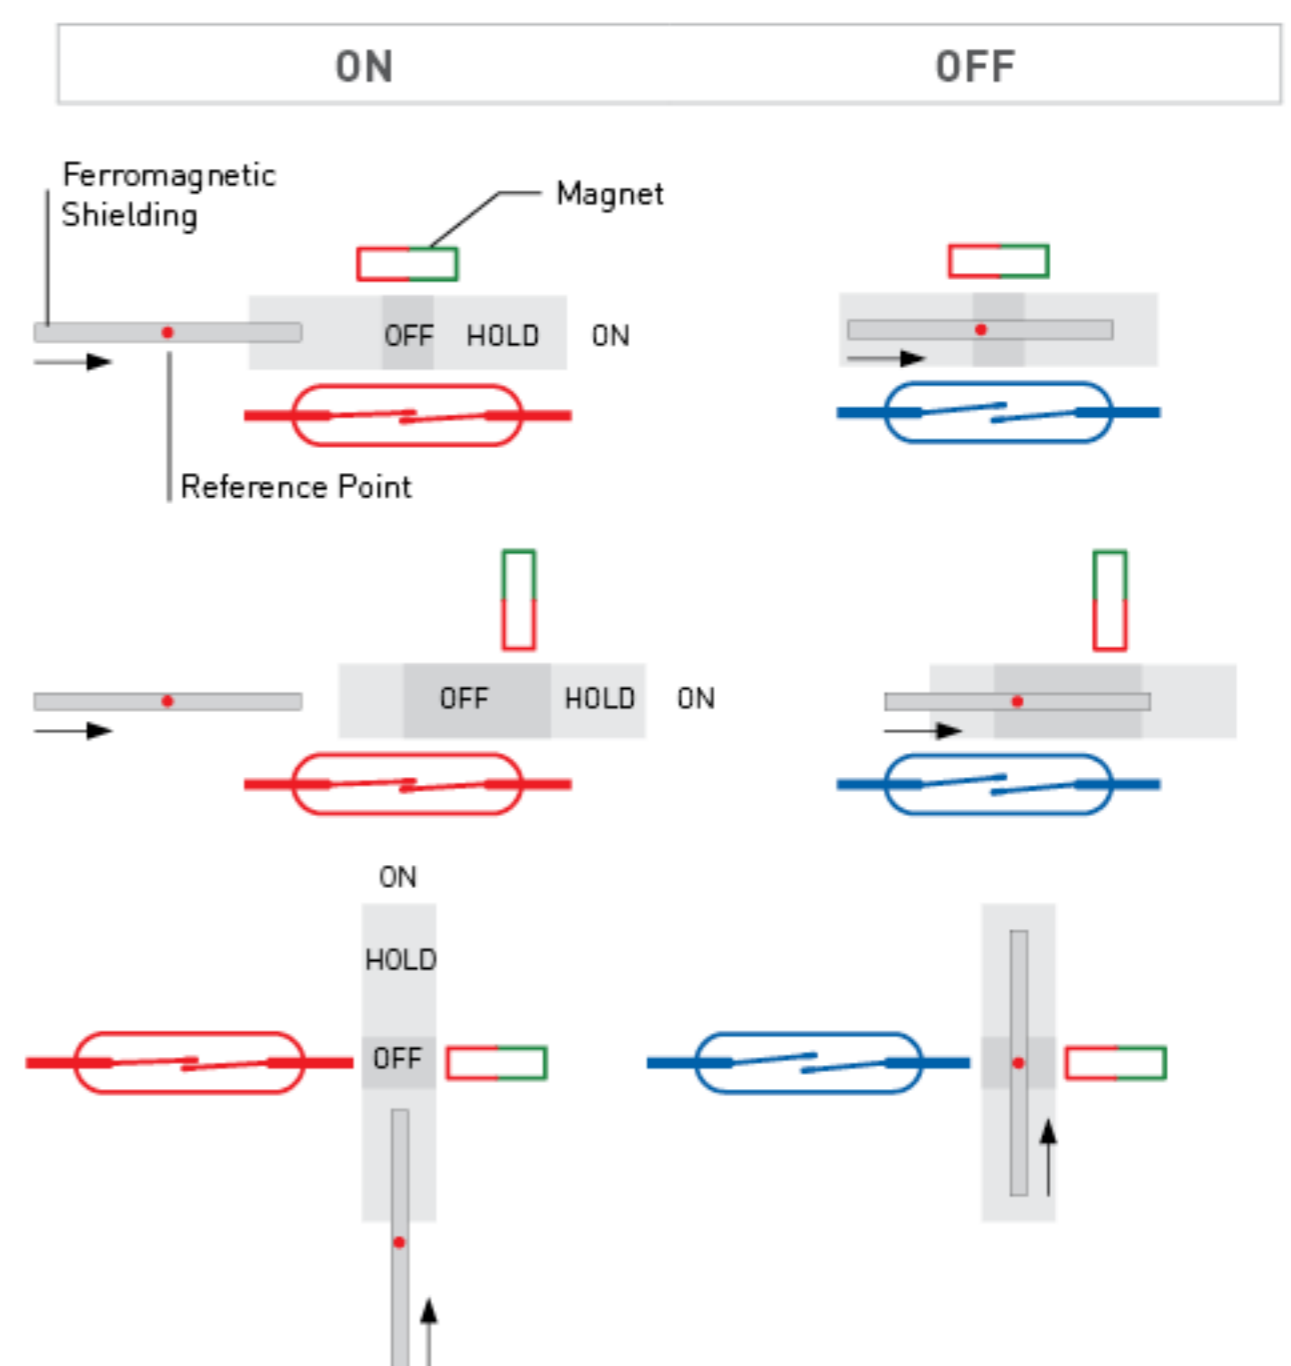


Check out our interactive Reed Switch here: [www.pic-gmbh.com / go](http://www.pic-gmbh.com/go)

Reed Switches: Precautions

Shock Resistance


Generally Reed Switches provide high shock resistance up to 100g. Still a drop on a hard surface can generate a shock of several 100g, which can lead to de-adjustment of contacts. Switches having been dropped should be re-tested for sensitivity before usage!

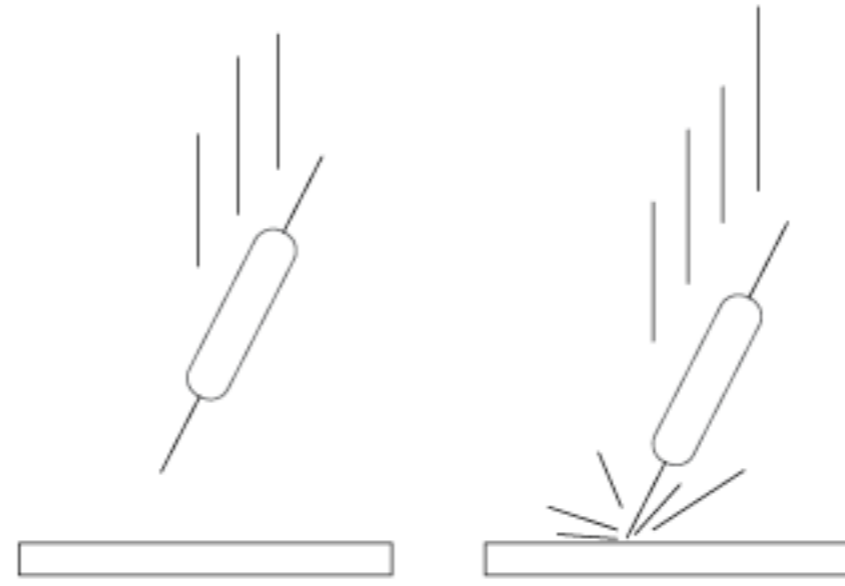

Do's and Don'ts when cutting and bending Reed Switches

Incorrect bending or cutting of terminals may lead to cracks in the sealing area due to heavy mechanical stress. To avoid this problem the remaining part of terminal between glass body and point of bending resp. cutting, should be gripped tightly.


Cutting

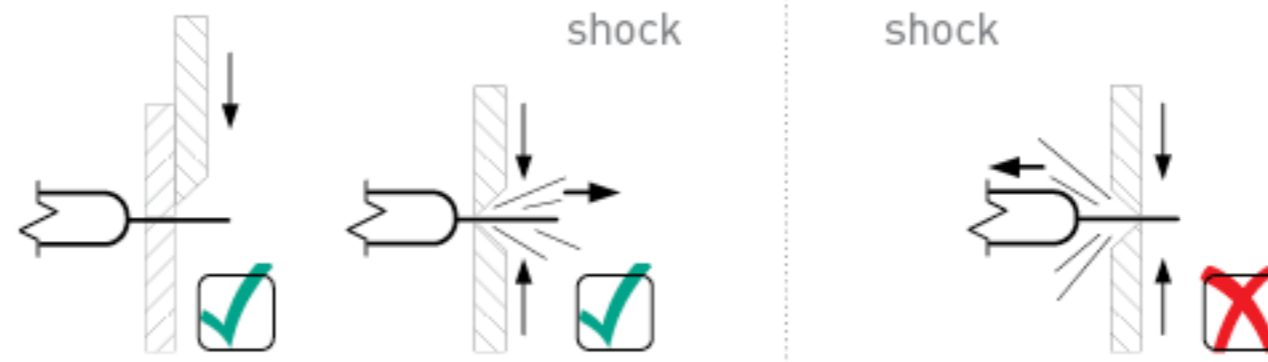

Forces directed away from Reed Switch

Forces directed toward Reed Switch!

Bending

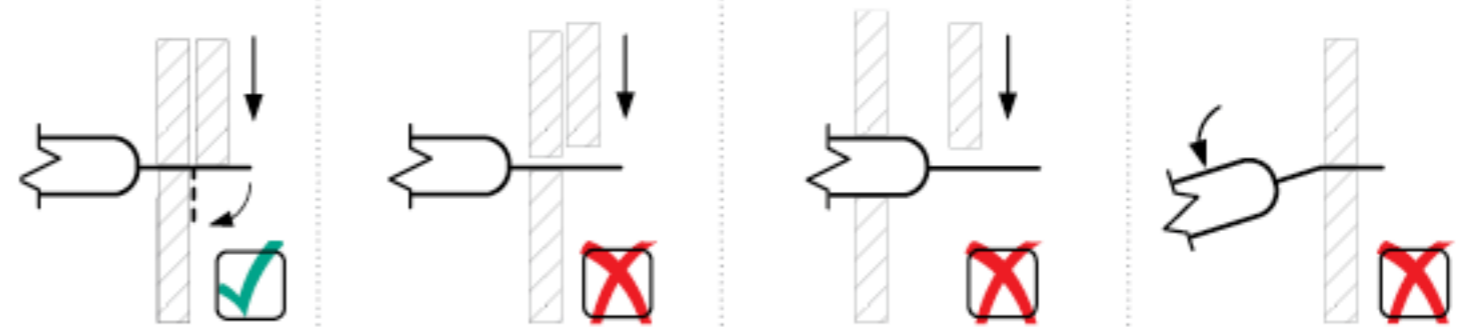

Terminal gripped tightly between glass body and point of bending


Terminal not gripped

Gripped on glass body


Terminal not gripped between glass body and point of bending

Dimensioning of modified Reed Switches


We supply Reed Switches with terminals modified to nearly any requirement. Dimensioning should be made according to the examples below.

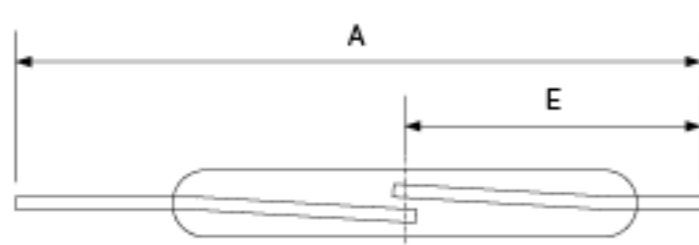

a) cut

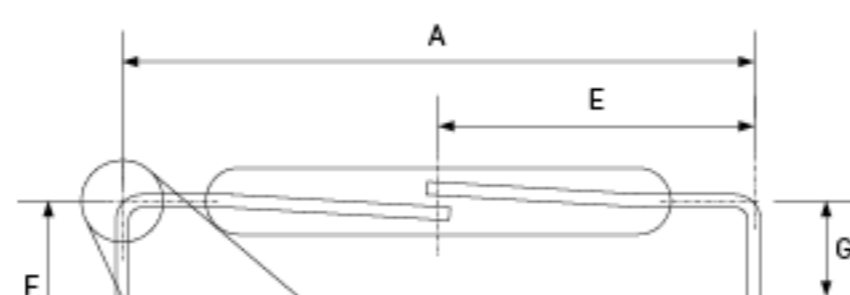

b) cut & bent

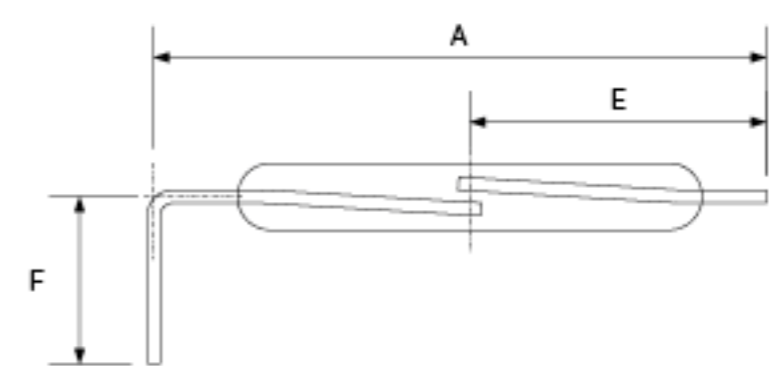

c) cut & bent

center wire

Chemical resistance chart

+ = excellent o = limited - = poor	Chemical resistance @20° C/@60° C				
	ABS	PA	PP	POM	Stainless Steel 304
Acetic Acid, dilute	-/-	-/-	+/+	+/o	+/+
Acetone	-/-	+/+	+/o	+/o	+/+
Ammonium Hydroxide	o/-	+/+	+/+	+/+	+/+
Aniline	-/-	o/-	+/+	-/-	+/+
Beer, Wine, Whiskey	+/+	+/+	+/+	+/+	+/+
Butanol	+/o	+/+	+/+	+/o	+/+
Chloroform	-/-	-/-	-/-	-/-	+/+
Citric Acid	+/+	+/+	+/+	+/-	o/o
Copper Sulphate	+/+	-/-	+/+	+/+	o/o
Detergents	+/o	+/o	+/+	+/+	+/+
Diesel fuel	+/+	o/o	+/o	+/+	+/+
Ethanol	+/+	+/+	+/+	+/+	+/+
Ethylene Glycol	+/+	+/+	+/+	+/o	+/+
Ferric Chloride	+/+	-/-	+/+	-/-	-/-
Formaldehyde (Formalin)	+/+	o/o	+/+	+/+	+/+
Formic Acid	+/o	-/-	+/+	-/-	+/o
Fruit Juice	+/+	+/+	+/+	+/-	+/+
Gasoline	-/-	-/-	-/-	+/+	+/+
Glycerol (Glycerin)	+/+	+/+	+/+	+/+	+/+
Hydrochloric Acid	+/-	-/-	+/+	-/-	-/-
Hydrogen Peroxide, dilute	-/-	-/-	+/+	o/-	+/+
Lactic Acid	+/+	o/-	+/+	+/-	+/o
Methanol	-/-	o/-	+/+	+/+	+/+
Milk	+/o	+/+	+/+	+/+	+/+
Mineral Oil	+/+	+/+	+/+	+/+	+/+
Nitric Acid, dilute	-/-	-/-	+/+	-/-	+/o
Nitrobenzene	-/-	-/-	+/+	+/-	+/+
Phosphoric Acid, dilute	+/+	-/-	+/+	+/-	o/-
Propanol (IPA)	o/-	+/+	+/+	+/+	o/o
Silver Nitrate	+/o	o/-	+/+	+/-	+/+
Soaps	+/+	+/+	+/+	+/+	+/+
Sodium Hydroxide, dilute	+/+	o/-	+/+	+/+	+/+
Sulphuric Acid, dilute	o/-	-/-	+/+	o/-	o/-
Urine	+/+	+/+	+/+	+/+	+/+
Vegetable Oil	+/o	+/+	+/+	+/+	+/+
Water	+/+	+/o	+/+	+/+	+/+
Water, Sea-, Salt-	+/+	+/o	+/+	+/+	-/-

Above data is intended only as a guide for chemical compatibility.

We do not assume any liability for the accuracy of the information.

It is strongly recommended that users perform their own tests to determine suitability of material.

Contact

[A connection between people and companies, the possibility to exchange information in writing, verbally or personally.]

- PIC GROUP
- PIC PARTNER NETWORK
- ▨ PIC DIRECT SALES

PIC GmbH

Wendelstein, Germany

Phone
+49 (0) 9129 90 70 89-0

E-Mail
info@pic-gmbh.com

PIC Sensors Asia Ltd.

Hong Kong

Phone
+852 27 82 27 83

E-Mail
philip@pic-sensors.hk



PIC Sensors Korea Inc.

Seoul, South Korea

Phone
+31 717 55 74

E-Mail
lee@pic-gmbh.com

PIC Sensors Zhuhai Ltd.

Zhuhai, P.R.China

Phone
+86 756 7512130

E-Mail
philip@pic-sensors.hk

PIC Sensor San. ve Tic. Ltd. Sti.

Gebze / Kocaeli, Turkey

Phone
+90 262 751 17 16

E-Mail
burak.asureciler@pic-sensor.com.tr

